

# Source Separation and Beamforming

Stephan Weiss, Ian K. Proudler and Fraser K. Coutts

UDRC Consortium: Edinburgh, Heriot-Watt, Strathclyde & Belfast  
Centre for Signal & Image Processing  
Department of Electronic & Electrical Engineering  
University of Strathclyde, Glasgow, Scotland, UK

UDRC Summer School, 27 June 2019

With many thanks to:

J.G. McWhirter, J. Pestana, J. Corr, K. Thompson, Z. Wang, and  
C. Delaosa

This work was supported by QinetiQ, the Engineering and Physical Sciences Research Council (EPSRC) Grant number EP/S000631/1 and the MOD University Defence Research Collaboration in Signal Processing.

# Polynomial Matrix Co-Enthusiasts



# Today's Overview

1. Narrowband array processing and beamforming;
2. Narrowband blind source separation;
3. Polynomial matrix fundamentals and algorithms;
4. Broadband array applications.


# Narrowband Beamforming

## Contents:

1. Introduction .....	5
2. Spatial Sampling .....	6
3. Steering Vector .....	8
4. Data Independent Beamformer Design .....	9
5. Statistically Optimum Beamformer Design .....	19
6. Beamforming and MIMO .....	26
7. Summary .....	30

# Intuitive Beamforming


- ▶ A **farfield wavefront** arrives at a sensor array:

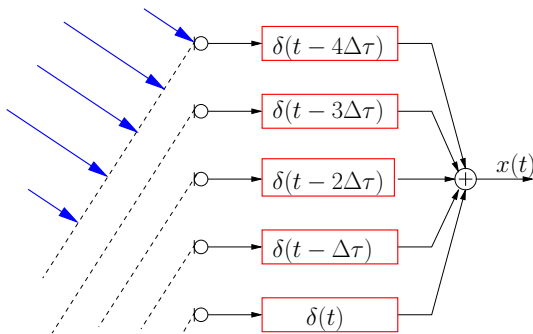

- ▶ due to the direction of arrival (DOA) and finite propagation speed, the wavefront will arrive at different sensors with a delay  $\Delta\tau$ ;
- ▶ with appropriate **processing (beamforming)**, the sensor signals can be aligned to create constructive interference at the output  $x(t)$ .

# Spatial Sampling

- ▶ For unambiguous **spatial sampling**, we need to take **at least two samples per wavelength** of the highest frequency component in the array signals;
- ▶ analogy from **temporal sampling (Nyquist)**: take at **least two samples per period** (relating to the highest frequency component);
- ▶ Wavelength  $\lambda$  and frequency  $f$  are related by the propagation speed  $c$  in the medium:  $\lambda = \frac{c}{f}$ ;

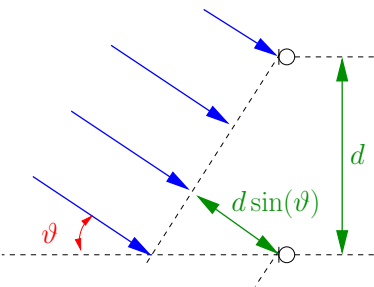

- ▶ maximum sensor distance


$$d = \frac{\lambda_{\max}}{2} = \frac{c}{2f_{\max}}$$

- ▶ time delay between sensors

$$\Delta\tau = \frac{d \sin(\vartheta)}{c} = \frac{\sin(\vartheta)}{2f_{\max}}$$

## Spatial and Temporal Sampling

- Consider the array signals  $x_0(t)$  and  $x_1(t)$  due to a source  $e^{j(\omega t + \varphi_0)}$ .

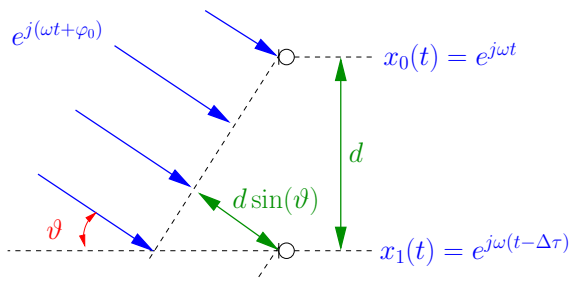

- sampling with  $t = nT_s$  leads to

$$x_0[n] = e^{j\omega n T_s} \quad \text{and} \quad x_1[n] = e^{j\omega(n T_s - \Delta\tau)}$$

- with  $f_{\max} = \frac{f_s}{2} = \frac{1}{2T_s}$  and normalised angular frequency  $\Omega = \omega T_s$ ,

$$x_0[n] = e^{j\Omega n} \quad \text{and} \quad x_1[n] = e^{j\Omega n} \cdot e^{-j\Omega \sin(\vartheta)}$$

## Narrowband Array Signals

- ▶ A narrowband source with norm. angular frequency  $\Omega$  illuminates an  $M$ -element linear array of equispaced sensors:


$$\mathbf{x}[n] = \begin{bmatrix} x_0[n] \\ x_1[n] \\ \vdots \\ x_{M-1}[n] \end{bmatrix} = e^{j\Omega n} \cdot \begin{bmatrix} 1 \\ e^{-j\Omega \sin(\vartheta)} \\ \vdots \\ e^{-j(M-1)\Omega \sin(\vartheta)} \end{bmatrix} = e^{j\Omega n} \cdot \mathbf{s}_{\Omega, \vartheta}$$

- ▶ the vector  $\mathbf{s}_{\Omega, \vartheta}$  characterises the phase shifts of waveform with frequency  $\Omega$  and DOA  $\vartheta$  measured at the array sensors;
- ▶ since a narrowband signal  $e^{j\Omega n}$  only causes phase shifts rather than delays, constructive interference can be accomplished by a set of complex multipliers rather than processors  $\delta(t - m\Delta\tau)$ ,  $m = 0, 1, \dots, (M - 1)$ ;
- ▶ beamforming problem: how to select the set of complex coefficients?



# Narrowband Array Processing

- Find a set of complex multipliers  $w_m$ ,  $m = 0, 1, \dots (M - 1)$ :

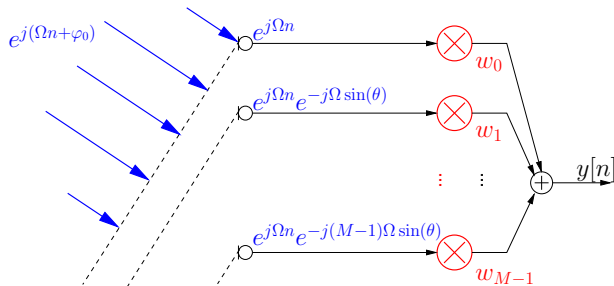

- to steer the array characteristic towards this source, the output

$$y[n] = [w_0 \ w_1 \ \dots \ w_{M-1}] e^{j\Omega n} \begin{bmatrix} 1 \\ e^{-j\Omega \sin(\vartheta)} \\ \vdots \\ e^{-j(M-1)\Omega \sin(\vartheta)} \end{bmatrix} = e^{j\Omega n} \mathbf{w}^H \mathbf{s}_{\Omega, \vartheta}$$

should fulfill  $y[n] = e^{j\Omega n}$ , leading to  $\mathbf{w}^H \mathbf{s}_{\Omega, \vartheta} = 1$ .

# Beamforming Vector

- ▶ For later convenience and compatibility, the Hermitian transpose operator  $\{\cdot\}^H$  is used to denote the coefficient vector

$$\mathbf{w}^H = [w_0 \ w_1 \ \dots \ w_{M-1}]$$

- ▶ as a result, the vector  $\mathbf{w}$  hold the **complex conjugates** of the coefficients,

$$\mathbf{w} = \begin{bmatrix} w_0^* \\ w_1^* \\ \vdots \\ w_{M-1}^* \end{bmatrix}$$

- ▶ to access the actual unconjugated coefficients, the beamforming vector  $\mathbf{w}^*$  has to be considered
- ▶ note that

$$\mathbf{w}^H \mathbf{s}_{\Omega, \vartheta} = 1 \quad \longrightarrow \quad \mathbf{s}_{\Omega, \vartheta}^H \mathbf{w} = 1$$

## Narrowband Beamforming — Single Source

- ▶ The expression  $\mathbf{s}_{\Omega,\vartheta}^H \mathbf{w} = 1$  forms a system with one single equation and  $M$  unknowns

$$\boxed{\mathbf{s}_{\Omega,\vartheta}^H} \boxed{\mathbf{w}} = \boxed{1}$$

- ▶ general solution to an underdetermined system  $\mathbf{Ax} = \mathbf{b}$  is the right pseudo-inverse  $\mathbf{A}^\dagger$ ,

$$\mathbf{x} = \mathbf{A}^\dagger \mathbf{b} = \mathbf{A}^H (\mathbf{A} \mathbf{A}^H)^{-1} \mathbf{b}$$

- ▶ here:

$$\mathbf{w} = (\mathbf{s}_{\Omega,\vartheta}^H)^\dagger \cdot 1 = \mathbf{s}_{\Omega,\vartheta} \cdot (\mathbf{s}_{\Omega,\vartheta}^H \mathbf{s}_{\Omega,\vartheta})^{-1} \cdot 1 = \frac{\mathbf{s}_{\Omega,\vartheta}}{\|\mathbf{s}_{\Omega,\vartheta}\|_2^2} = \frac{1}{M} \mathbf{s}_{\Omega,\vartheta}$$

- ▶ the complex conjugation for  $\mathbf{w}^*$  inverts and therefore compensates the phase of the steering vector, which could have been foreseen
- ▶ the formulation via the pseudo-inverse will be very powerful for more complicated cases.

## Narrowband Beamformer Example

- ▶ Source parameters:  $\Omega = \frac{\pi}{2}$  and  $\vartheta = 30^\circ$  ; array parameter:  
 $M = 5$ ;
- ▶ steering vector (with  $\Omega \sin(\vartheta) = \frac{1}{4}\pi$ ):

$$\mathbf{s}_{\Omega, \vartheta}^T = [1 \quad e^{-j\frac{1}{4}\pi} \quad \dots \quad e^{-j\frac{4}{4}\pi}]$$

- ▶ coefficient vector is given by  $\mathbf{w} = (\mathbf{s}_{\Omega, \vartheta}^H)^{\dagger}$ ;
- ▶ numerical solution in Matlab;  
Omega=1/4; theta = pi/6; M=5;  
`s = exp(-sqrt(-1)*Omega*sin(theta)*(0:(M-1)'));`  
`w = pinv(s')`;
- ▶ `angle([s conj(w)])/pi` yields:


-0.00000	0.00000
-0.25000	0.25000
-0.50000	0.50000
-0.75000	0.75000
-1.00000	1.00000

# Beam Pattern I

- ▶ The beamformer has a unit gain towards a source with frequency  $\Omega$  and DoA  $\theta$ ; what is its gain response towards other angles of arrival?
- ▶ the beam pattern measures the response of a beamformer by sweeping the angle  $\psi$  of a source with frequency  $\Omega$


$$g(\Omega, \psi) = \mathbf{w}^H \mathbf{s}_{\Omega, \psi}$$

- ▶ beam pattern for the previous example:

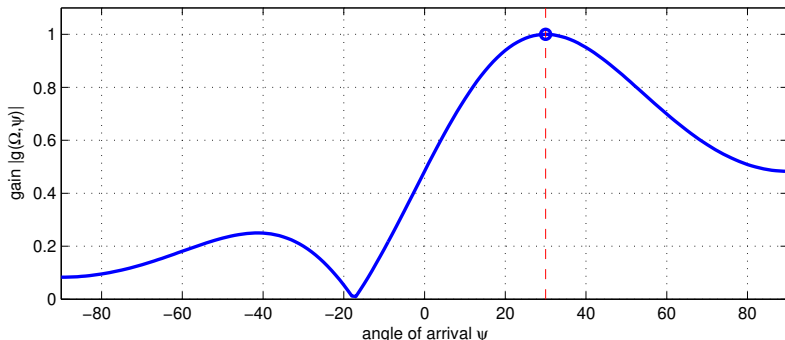

## Beam Pattern II

- Below are a number of beam patterns for the case  $\Omega = \frac{\pi}{2}$  and  $\vartheta = 30^\circ$  for variable  $M$ ;

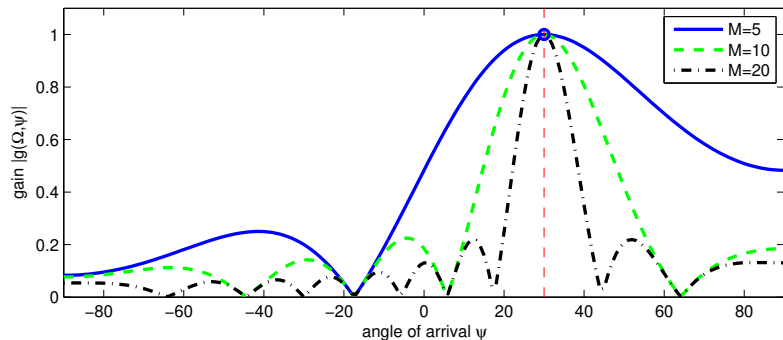

- increasing the sensor number  $M$  narrows the main beam, and increases the number of spatial zeros;
- analogous characteristic in the time domain: increased temporal support leads to higher frequency resolution.

## Interference


- ▶ Many scenarios contain a source of interest and a number of interferers:

signal of interest:

$$\{\Omega_0, \vartheta_0\}$$

two interferers:

$$\{\Omega_1, \vartheta_1\}, \{\Omega_2, \vartheta_2\}$$

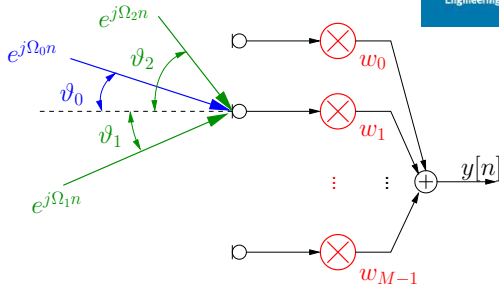

- ▶ we would like to control the beampattern to place spatial nulls in the directions of the interfering sources;
- ▶ Problem formulation and solution :

$$\begin{bmatrix} \mathbf{s}_{\Omega_0, \vartheta_0}^H \\ \mathbf{s}_{\Omega_1, \vartheta_1}^H \\ \mathbf{s}_{\Omega_2, \vartheta_2}^H \end{bmatrix} \mathbf{w} = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} \quad \longrightarrow \quad \mathbf{w} = \begin{bmatrix} \mathbf{s}_{\Omega_0, \vartheta_0}^H \\ \mathbf{s}_{\Omega_1, \vartheta_1}^H \\ \mathbf{s}_{\Omega_2, \vartheta_2}^H \end{bmatrix}^\dagger \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}$$

## Narrowband BF Example — Multiple Sources

- ▶ The signal of interest illuminates an  $M = 5$  element array at a frequency  $\Omega_0 = \frac{\pi}{2}$  with a DoA  $\vartheta_0 = 30^\circ$
- ▶ two interferers at  $\Omega_1 = \Omega_2 = \Omega_0$  are present with DoA  $\vartheta_1 = -45^\circ$  and  $\vartheta_2 = 60^\circ$
- ▶ results via right pseudo-inverse of steering vectors


$\angle \mathbf{s}_{\Omega_0, \vartheta_0}$	$\angle \mathbf{s}_{\Omega_1, \vartheta_1}$	$\angle \mathbf{s}_{\Omega_2, \vartheta_2}$	$\angle \mathbf{w}^*$	$ \mathbf{w} $
0.00	0.00	0.00	-42.81	0.3172
45.00	63.64	-77.94	-105.01	0.3004
90.00	127.28	-155.89	-90.00	0.2343
135.00	-169.08	126.17	-74.99	0.3004
180.00	-105.44	48.23	-137.19	0.3172

- ▶ the angle of  $\mathbf{w}$  is no longer intuitive; also note that the coefficients in  $\mathbf{w}$  no longer have the same modulus
- ▶ amongst a manifold of solutions, the right pseudo-inverse provides the minimum norm solution.



## Multiple Source Example — Beampattern

- ▶ Beam pattern for previous example with one source of interest and two interferers:

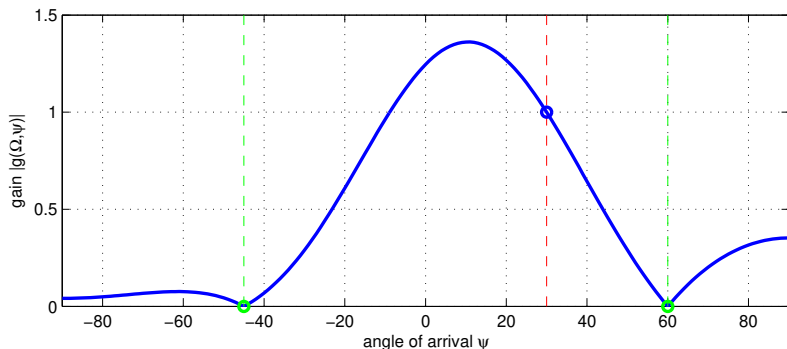


- ▶ the pseudo-inverse is the minimum-norm solution, keeping the general gain response as low as possible;
- ▶ the minimum norm property protects against spatially white noise.

# Data Independent Beamforming

- ▶ Previous beamformer designs were based on the knowledge of DoA of the signal of interest and of interfering sources;
- ▶ remaining degrees of freedom are invested to suppress spatially white noise;
- ▶ using the analogy between spatial and temporal processing, classical filter design techniques can be invoked to design arrays with a bandpass-type angular response;
- ▶ beamformers based on source parameters (frequency, DoA) rather than the actual received waveforms are termed **data independent beamformers**;
- ▶ this is in contrast to **statistically optimum beamformers**, which take the received signal statistics into account.

# Statistically Optimum Beamforming

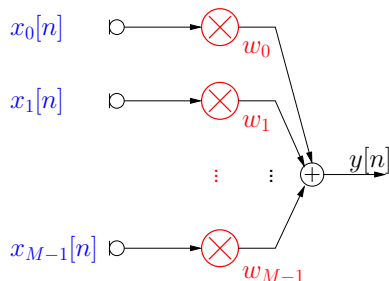

- ▶ Statistically optimum beamformer minimise e.g. the signal power of the beamformer output,  $y[n]$ ;
- ▶ to avoid the trivial solution  $\mathbf{w} = \mathbf{0}$ , the signal of interest needs to be protected by constraints;
- ▶ this results in e.g. the following constrained optimisation problem

$$\min_{\mathbf{w}^*} \mathcal{E} \{ |y[n]|^2 \} \quad \text{subject to} \quad \mathbf{s}_{\Omega, \vartheta}^H \mathbf{w} = 1$$

- ▶ the solution to this specific statistically optimum beamformer is known as the **minimum variance distortionless response** (MVDR).

## MVDR Beamformer

- ▶ Solving the MVDR problem: minimise the power of  $y[n] = \mathbf{w}^H \mathbf{x}$  subject to the constraint  $\mathbf{w}^H \mathbf{s}_{\Omega_0, \vartheta_0} = 1$ ;
- ▶ Formulation using a Lagrange multiplier  $\lambda$ :

$$\frac{\partial}{\partial \mathbf{w}^*} (\mathbf{w}^H \mathcal{E}\{\mathbf{x}\mathbf{x}^H\} \mathbf{w} - \lambda(\mathbf{w}^H \mathbf{s}_{\Omega_0, \vartheta_0} - 1)) = \mathbf{R}_{xx} \mathbf{w} - \lambda \mathbf{s}_{\Omega_0, \vartheta_0} = \mathbf{0}$$

- ▶ the solution  $\mathbf{w} = \lambda \mathbf{R}_{xx}^{-1} \mathbf{s}_{\Omega_0, \vartheta_0}$  is inserted into the constraint equation to determine  $\lambda$ :

$$\lambda \mathbf{s}_{\Omega_0, \vartheta_0}^H \mathbf{R}_{xx}^{-1} \mathbf{s}_{\Omega_0, \vartheta_0} = 1$$

- ▶ therefore

$$\mathbf{w}_{\text{MVDR}} = (\mathbf{s}_{\Omega_0, \vartheta_0}^H \mathbf{R}_{xx}^{-1} \mathbf{s}_{\Omega_0, \vartheta_0})^{-1} \mathbf{R}_{xx}^{-1} \mathbf{s}_{\Omega_0, \vartheta_0}$$

- ▶ this stastically optimum beamformer has various other names, e.g. Capon beamformer.

# MVDR Beamformer — Simple Case

- ▶ In the case of spatially white noise input, such that

$$\mathbf{R}_{xx} = \sigma_{xx}^2 \mathbf{I} \quad \longrightarrow \quad \mathbf{R}_{xx}^{-1} = \sigma_{xx}^{-2} \mathbf{I}$$

the MVDR solution reduces to


$$\mathbf{w}_{\text{MVDR}} = \frac{\mathbf{s}_{\Omega_0, \vartheta_0}}{\|\mathbf{s}_{\Omega_0, \vartheta_0}\|_2^2} = \frac{\mathbf{s}_{\Omega_0, \vartheta_0}}{M} \quad ;$$

- ▶ this is identical to the data independent beamformer in the absence of interference (i.e. no spatially structured noise);

## Generalised Sidelobe Canceller (GSC)

- ▶ The generalised sidelobe canceller is a specific implementation of the MVDR beamformer; it transforms the constrained MVDR problem into an **unconstrained optimisation problem**;
- ▶ a first guess at the solution is performed by the **quiescent beamformer**  $\mathbf{w}_q$ , which is identical to the previously defined data independent beamformer, obtained by inverting the constraint equation


$$\mathbf{C}^H \mathbf{w}_q = \mathbf{f} \quad \longrightarrow \quad \mathbf{w}_q = (\mathbf{C}^H)^\dagger \mathbf{f}$$



- ▶ the quiescent beamformer eliminates interferers captured by  $\mathbf{C}$  and  $\mathbf{f}$ , but passes the signal of interest, any interferers unaccounted for in the constraints, and spatially distributed noise.

# GSC — Idea

- ▶ GSE idea: produce array signals that are free of any contribution from the signal of interest, and use the resulting signal vector  $\mathbf{u}[n]$  to eliminate remaining interference from the quiescent output:

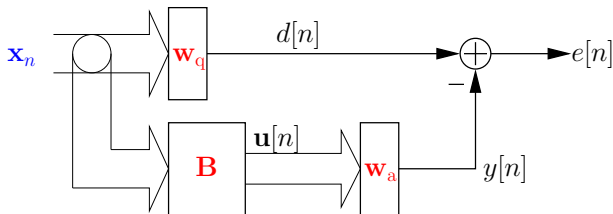

- ▶ the blocking matrix  $\mathbf{B}$  eliminates the signal of interest and any interferers captured by the constraints;
- ▶ the vector  $\mathbf{w}_a$  will be based on the statistics of  $\mathbf{u}[n]$  and  $d[n]$  to minimise the beamformer output variance  $\mathcal{E}\{|e[n]|^2\}$ .

## GSC — Blocking Matrix

- ▶ In order to project away from the constraints,

$$\mathbf{B} \cdot \mathbf{C} = \mathbf{B} \cdot \begin{bmatrix} \mathbf{s}_{\Omega_0, \vartheta_0} & \mathbf{s}_{\Omega_1, \vartheta_1} & \dots & \mathbf{s}_{\Omega_{r-1}, \vartheta_{r-1}} \end{bmatrix} = \mathbf{0}$$

- ▶ assuming that the  $r$  constraints are linearly independent, the singular value decomposition of the constraint matrix yields

$$\mathbf{B} \cdot \begin{bmatrix} \mathbf{U}_0 & \mathbf{U}_0^\perp \end{bmatrix} \left[ \begin{array}{ccc|c} \sigma_0 & & & \mathbf{0} \\ & \ddots & & \\ & & \sigma_{r-1} & \mathbf{0} \\ \hline & \mathbf{0} & & \mathbf{0} \end{array} \right] \cdot \mathbf{V}^H = \mathbf{0}$$

- ▶ the matrix  $\mathbf{U}_0^\perp \in \mathbb{C}^{M \times (M-r)}$  spans the nullspace of  $\mathbf{C}^H$ , and

$$\mathbf{B} = (\mathbf{U}_0^\perp)^H \in \mathbb{C}^{(M-r) \times M}$$

has the required property, as

$$(\mathbf{U}_0^\perp)^H \cdot \begin{bmatrix} \mathbf{U}_0 & \mathbf{U}_0^\perp \end{bmatrix} \boldsymbol{\Sigma} = \begin{bmatrix} \mathbf{0} & \mathbf{I} \end{bmatrix} \cdot \boldsymbol{\Sigma} = \mathbf{0}.$$



## GSC — Unconstrained Optimisation

- ▶ The beamforming vector  $\mathbf{w}_a$  is adjusted to minimise the beamformer's output power;
- ▶ the MMSE or Wiener solution is given by

$$\mathbf{w}_a = \mathbf{R}_{uu}^{-1} \cdot \mathbf{p} = \frac{\mathbf{B}\mathbf{R}_{xx}(\mathbf{C}^H)^\dagger \mathbf{f}}{\mathbf{B}\mathbf{R}_{xx}\mathbf{B}^H}$$

with the covariance matrix

$$\mathbf{R}_{uu} = \mathcal{E}\{\mathbf{u}[n] \cdot \mathbf{u}^H[n]\} = \mathbf{B} \mathcal{E}\{\mathbf{x}[n] \cdot \mathbf{x}^H[n]\} \mathbf{B}^H = \mathbf{B}\mathbf{R}_{xx}\mathbf{B}^H$$


and the cross-correlation vector

$$\mathbf{p} = \mathcal{E}\{\mathbf{u}[n] \cdot d^*[n]\} = \mathbf{B}\mathbf{R}_{xx}\mathbf{w}_q$$

- ▶ iterative optimisation schemes, such as the least mean squares (LMS) algorithm may be used to approximate the MMSE solution.

# Beamforming and MIMO Processing

- Assume a transmission scenario with an  $M$ -element transmit ( $T_x$ ) antenna array and an  $N$ -element receive ( $R_x$ ) array;

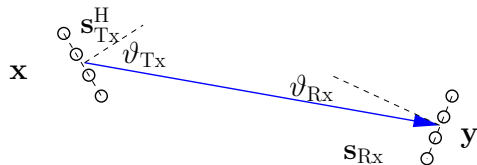

- in the absence of scatterers and any attenuation, the farfield transmission from the transmit antenna is characterised by a steering vector  $\mathbf{s}_{Tx}^H$ ;
- the incoming waveform at the Rx device is described by another steering vector  $\mathbf{s}_{Rx}$ ;
- the overall MIMO system between a  $T_x$  vector  $\mathbf{x} \in \mathbb{C}^M$  and an Rx vector  $\mathbf{y} \in \mathbb{C}^N$  is described as

# MIMO Requirements

- ▶ The farfield assumption is convenient for beamforming, but leads to a rank one MIMO system matrix which is incompatible with the desire to extract multiple independent subchannels or with to achieve diversity;
- ▶ **rich scattering** in connection with MIMO usually implies multiple reflections of signals;
- ▶ together with a sufficiently **large antenna spacing** means that the farfield assumption is invalid and the MIMO system matrix is **not rank deficient**;
- ▶ some suggestions of “sufficiently large spacing” imply an antenna element distance of  $d > 10\lambda$ ;
- ▶ recall spatial sampling requires  $d < \frac{1}{2}\lambda$  !

## Beamforming with $d > \frac{1}{2}\lambda$


- ▶ For a flexible spatial sampling with  $d = \alpha\lambda$ ,  $0 < \alpha \in \mathbb{R}$ , the steering vector for a waveform with normalised angular frequency  $\Omega$  and DoA  $\vartheta$  is

$$\mathbf{y} = e^{j\Omega n} \begin{bmatrix} 1 \\ e^{j2\alpha\Omega \sin(\vartheta)} \\ \vdots \\ e^{j2\alpha(M-1)\Omega \sin(\vartheta)} \end{bmatrix} = \mathbf{s}_{2\alpha\Omega, \vartheta} \cdot e^{j\Omega n}$$

- ▶ inspecting  $\mathbf{s}_{2\alpha\Omega, \vartheta}$  the steering vector is aliased to a different frequency  $2\alpha\Omega$ ;
- ▶ although the correct frequency can be retrieved unambiguously from temporal sampling of any array element, at  $\Omega$  various different angles could provide the same steering vector  $\mathbf{s}_{2\alpha\Omega, \vartheta}$ ;
- ▶ the array performs **spatial undersampling**, resulting in **spatial aliasing**.

## Spatial Undersampling Example

- ▶ Beamforming parameters: signal of interest with  $\Omega = \frac{\pi}{2}$ , direction of arrival  $\vartheta = 30^\circ$ ,  $M = 32$  array elements;
- ▶ data independent beamformer design with **correct spatial sampling** ( $d = \lambda/2$ ) and **incorrect spatial sampling** ( $d = 10\lambda$ ):

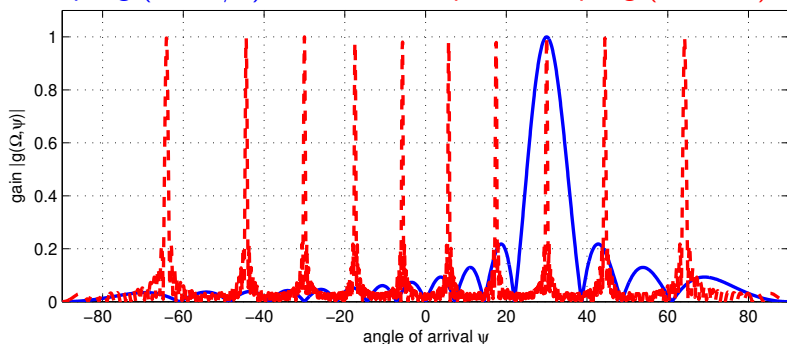

- ▶ MIMO systems perform beamforming, but may dissipate energy into aliased directions.

## Summary

- ▶ Spatial sampling by an array of sensors (e.g. antenna elements) has been explored;
- ▶ the spatial data window of a narrowband source is characterised by the steering vector;
- ▶ appropriate data independent beamformers can be designed based on the steering vectors of desired sources and interferers;
- ▶ statistically optimum beamformers are based on the signal statistics;
- ▶ a specific statistically optimum beamformer, the generalised sidelobe canceller, has been reviewed — it uses signal statistics to improve the performance of a data independent beamformer derived from the constraint equations;
- ▶ some similarities and differences between beamforming and MIMO systems have been highlighted.