

# Polynomial Matrix Algebra with Applications

Stephan Weiss, Ian K. Proudler, and Fraser K. Coutts

UDRC Phase 3 Consortium on Underpinning Signal Processing  
University of Strathclyde / University of Edinburgh

UDRC-EURASIP Summer School, Edinburgh, 22 June 2023

This work was supported by the Engineering and Physical Sciences Research Council (EPSRC) Grant number EP/S000631/1 and the MOD University Defence Research Collaboration in Signal Processing.

# Presentation Overview



## 1. Overview

### Part I: Polynomial Matrices and Decompositions

2. Polynomial matrices and basic operations
3. Parahermitian matrix / polynomial eigenvalue decomposition (PhEVD /PEVD)
4. Iterative PEVD algorithms
5. PEVD Matlab toolbox

### Part II: Beamforming & Source Separation Applications

6. Broadband MIMO decoupling
7. Broadband angle of arrival estimation
8. Broadband beamforming
9. Source-sensor transfer function extraction
10. Weak transient signal detection

# What is a Polynomial Matrix?

- ▶ A polynomial matrix is a polynomial with matrix-valued coefficients [52, 70], e.g.:

$$\mathbf{A}(z) = \begin{bmatrix} 1 & -1 \\ -1 & 2 \end{bmatrix} + \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} z^{-1} + \begin{bmatrix} -1 & 2 \\ 1 & -1 \end{bmatrix} z^{-2}; \quad (1)$$

- ▶ a polynomial matrix can equivalently be understood a matrix with polynomial entries, i.e.

$$\mathbf{A}(z) = \begin{bmatrix} 1 + z^{-1} - z^{-2} & -1 + z^{-1} + 2z^{-2} \\ -1 + z^{-1} + z^{-2} & 2 - z^{-1} - z^{-2} \end{bmatrix}; \quad (2)$$

- ▶ we may also encounter matrix-valued power series, Laurent polynomials, and Laurent series.

# Matrix-Valued Polynomials and Power Series



- ▶ A power series  $a(z)$  arises as the  $z$ -transform

$$a(z) = \sum_n a[n]z^{-n} \quad \text{or short} \quad a(z) \bullet \text{---} \circ a[n], \quad (3)$$

- ▶ for  $a(z)$  to exist as a power series,  $a[n]$  must be causal:  $a[n] = 0 \forall n < 0$ ;  
absolutely convergent:  $\sum_n |a[n]| < \infty$
- ▶ absolute convergence implies that  $a[n]$  decays at least as fast as an exponential function;
- ▶ a polynomial is a power series, but of finite length;
- ▶ polynomials or power series can form the entries of a matrix  $\mathbf{A}(z)$ .

## Example of a Power Series

- ▶ For the geometric series

$$a[n] = \begin{cases} 0, & n < 0 \\ (\frac{1}{2})^n, & n \geq 0 \end{cases} \quad (4)$$

we have

$$\sum_n |a[n]| = 1 + \frac{1}{2} + \frac{1}{4} + \frac{1}{8} + \dots = 2 < \infty ; \quad (5)$$


- ▶ therefore  $a[n]$  is an absolutely convergent power series, and  $a(z)$  exists as an analytic function;
- ▶ here, for  $a(z)$ :

$$a(z) = 1 + \frac{1}{2}z^{-1} + \frac{1}{4}z^{-2} + \frac{1}{8}z^{-3} + \dots = \frac{1}{1 - \frac{1}{2}z^{-1}} ; \quad (6)$$

- ▶ this looks like the transfer function of a causal infinite impulse response (IIR) filter.

# Laurent Series and Laurent Polynomials


- ▶ A Laurent series  $a[z]$  is potentially infinite, but can include non-negative terms for both  $n \geq 0$  and  $n < 0$ ;
- ▶ for  $a(z) \bullet \text{---} \circ a[n]$  to exist,  $a[n]$  needs to decay at least exponentially in both positive and negative time direction;

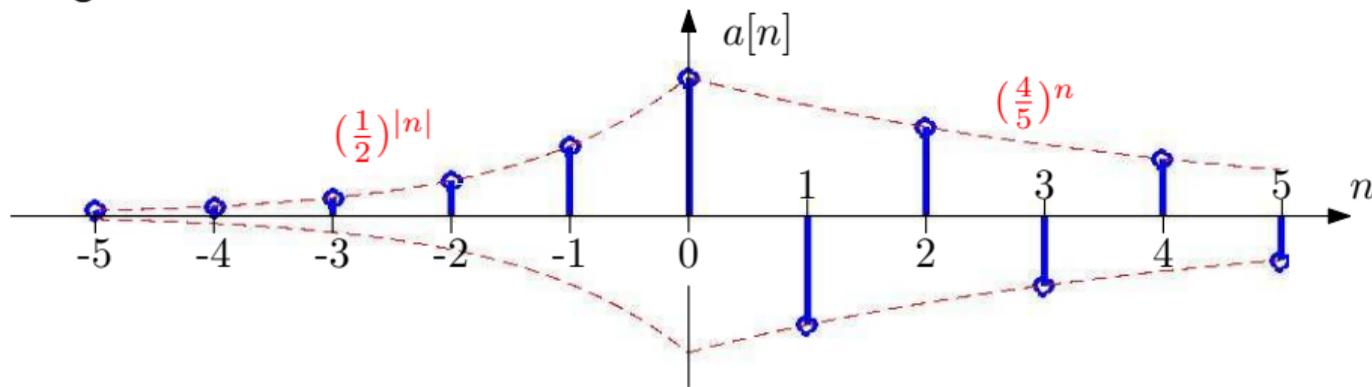

- ▶ if it possesses finite support,  $a(z)$  is a Laurent polynomial.

# Analyticity and Polynomial Approximation


- ▶ Absolute convergence of  $a[n]$  implies analyticity of  $a(z)$  ●—○  $a[n]$ ;
- ▶ the best approximation of an infinite order, analytic  $a(z)$  in the least squares sense is by truncation (power series  $\rightarrow$  polynomial);
- ▶ likewise, a Laurent series can be approximated by a polynomial through truncation ( $\rightarrow$  Laurent polynomial) and an appropriate delay ( $\rightarrow$  polynomial);

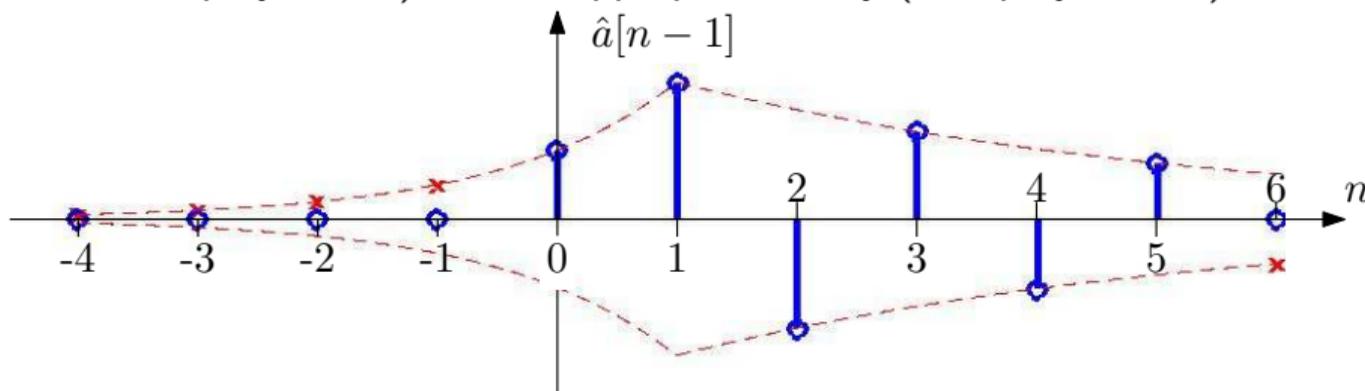

- ▶ hence polynomials can typically approximate any general analytic function well, and arbitrarily closely.

## Where Do Polynomial Matrices Arise?

- ▶ A multiple-input multiple-output (MIMO) system could be made up of a number of finite impulse response (FIR) channels:

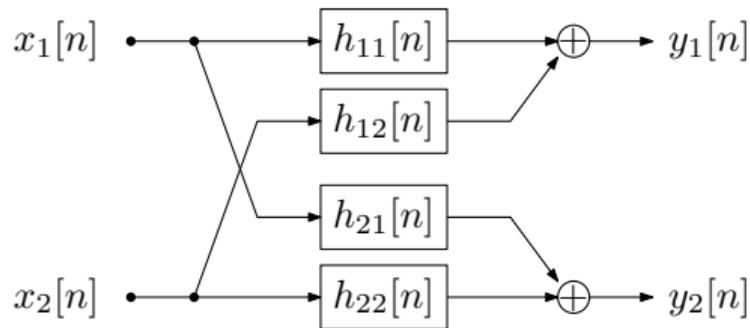


- ▶ writing this as a matrix of impulse responses:

$$\mathbf{H}[n] = \begin{bmatrix} h_{11}[n] & h_{12}[n] \\ h_{21}[n] & h_{22}[n] \end{bmatrix}. \quad (7)$$

# Transfer Function of a MIMO System

- ▶ Example for MIMO matrix  $\mathbf{H}[n]$  of impulse responses:


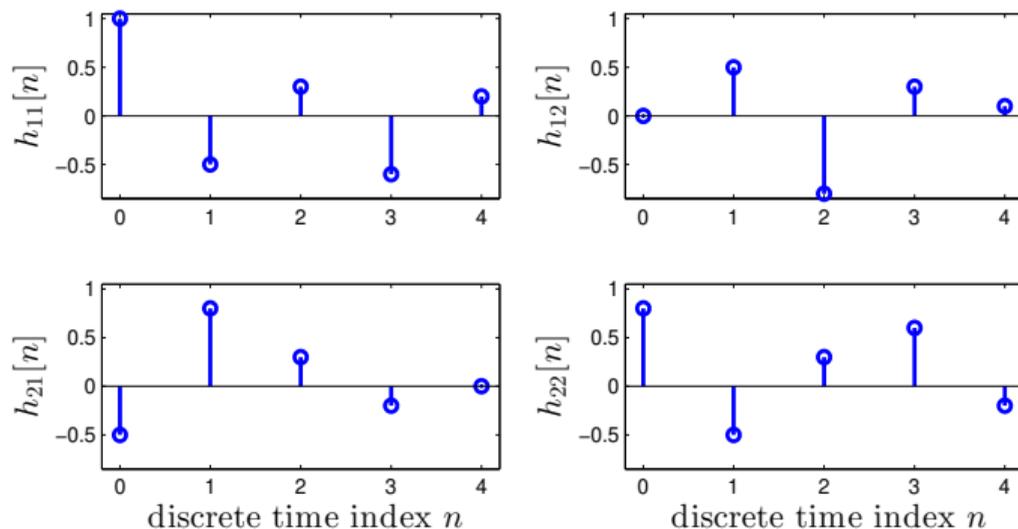


- ▶ the transfer function of this MIMO system is a polynomial matrix:

$$\mathbf{H}(z) = \sum_{n=-\infty}^{\infty} \mathbf{H}[n]z^{-n} \quad \text{or} \quad \mathbf{H}(z) \bullet \text{---} \circ \mathbf{H}[n] \quad (8)$$

# Analysis Filter Bank


- ▶ Critically decimated  $K$ -channel analysis filter bank [122, 123, 48]:
- ▶ equivalent polyphase representation:

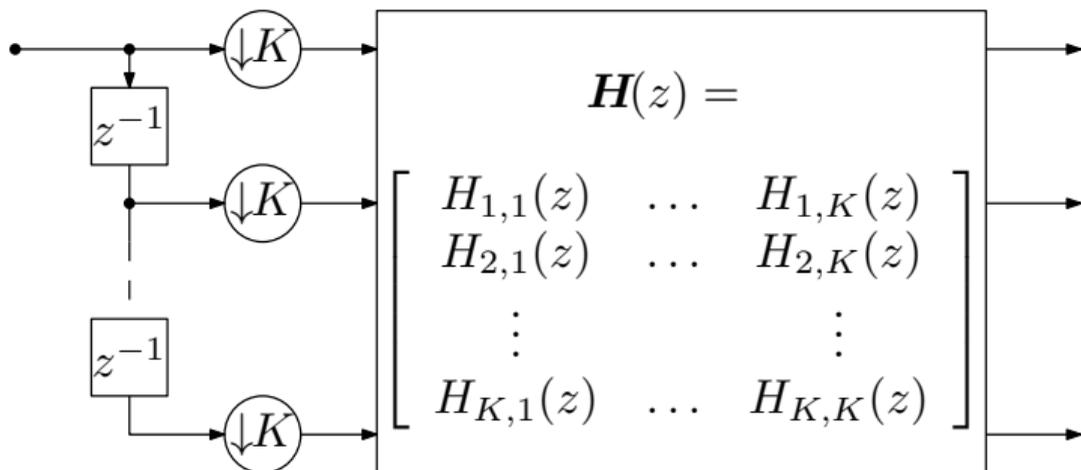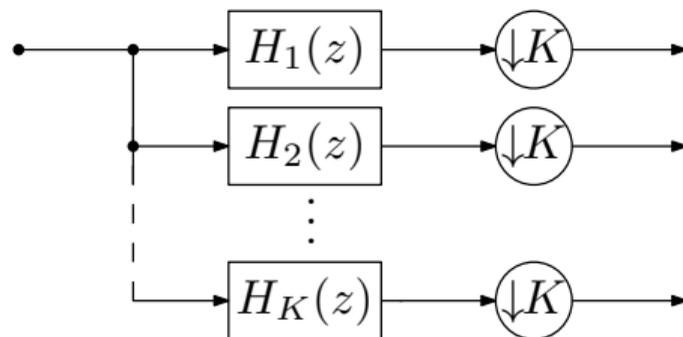

# Polyphase Analysis Matrix

- ▶ With the  $K$ -fold polyphase decomposition of the analysis filters

$$H_k(z) = \sum_{n=1}^K H_{k,n}(z^K) z^{-n+1} \quad (9)$$

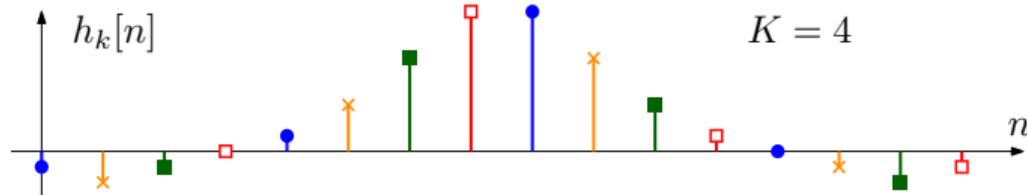


- ▶ the polyphase analysis matrix is a polynomial matrix:


$$\mathbf{H}(z) = \begin{bmatrix} H_{1,1}(z) & H_{1,2}(z) & \dots & H_{1,K}(z) \\ H_{2,1}(z) & H_{2,2}(z) & \dots & H_{2,K}(z) \\ \vdots & \vdots & \ddots & \vdots \\ H_{K,1}(z) & H_{K,2}(z) & \dots & H_{K,K}(z) \end{bmatrix} \quad (10)$$

# Synthesis Filter Bank

- ▶ Critically decimated  $K$ -channel synthesis filter bank:

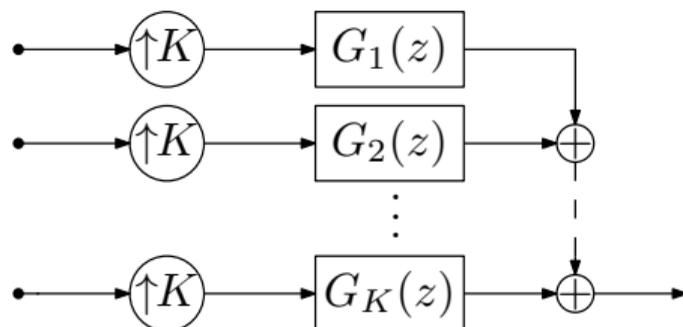

- ▶ equivalent polyphase representation:

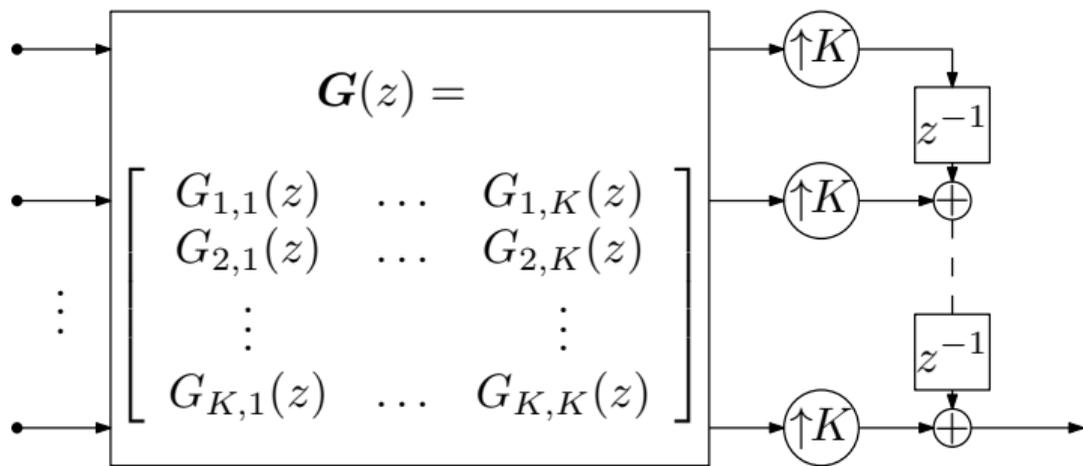

## Polyphase Synthesis Matrix

- ▶ Analogous to analysis filter bank, the synthesis filters  $G_k(z)$  can be split into  $K$  polyphase components, creating a polyphase synthesis matrix

$$\mathbf{G}(z) = \begin{bmatrix} G_{1,1}(z) & G_{1,2}(z) & \dots & G_{1,K}(z) \\ G_{2,1}(z) & G_{2,2}(z) & \dots & G_{2,K}(z) \\ \vdots & \vdots & \ddots & \vdots \\ G_{K,1}(z) & G_{K,2}(z) & \dots & G_{K,K}(z) \end{bmatrix} \quad (11)$$

- ▶ operating analysis and synthesis back-to-back, perfect reconstruction is achieved if

$$\mathbf{G}(z)\mathbf{H}(z) = \mathbf{I}; \quad (12)$$

- ▶ i.e. for perfect reconstruction, the polyphase analysis matrix must be invertible:  
 $\mathbf{G}(z) = \mathbf{H}^{-1}(z)$ .

# Space-Time Covariance Matrix

- ▶ Measurements obtained from  $M$  sensors are collected in a vector  $\mathbf{x}[n] \in \mathbb{C}^M$ :

$$\mathbf{x}^T[n] = [x_1[n] \ x_2[n] \ \dots \ x_M[n]] ; \quad (13)$$

- ▶ with the expectation operator  $\mathcal{E}\{\cdot\}$ , the spatial correlation is captured by  $\mathbf{R} = \mathcal{E}\{\mathbf{x}[n]\mathbf{x}^H[n]\}$ ;
- ▶ for spatial and temporal correlation, we require a space-time covariance matrix


$$\mathbf{R}[\tau] = \mathcal{E}\{\mathbf{x}[n]\mathbf{x}^H[n - \tau]\} \quad (14)$$

- ▶ this space-time covariance matrix contains auto- and cross-correlation terms, e.g. for  $M = 2$

$$\mathbf{R}[\tau] = \begin{bmatrix} \mathcal{E}\{x_1[n]x_1^*[n - \tau]\} & \mathcal{E}\{x_1[n]x_2^*[n - \tau]\} \\ \mathcal{E}\{x_2[n]x_1^*[n - \tau]\} & \mathcal{E}\{x_2[n]x_2^*[n - \tau]\} \end{bmatrix} \quad (15)$$

# Cross-Spectral Density Matrix

- ▶ example for a space-time covariance matrix  $\mathbf{R}[\tau] \in \mathbb{R}^{2 \times 2}$ :

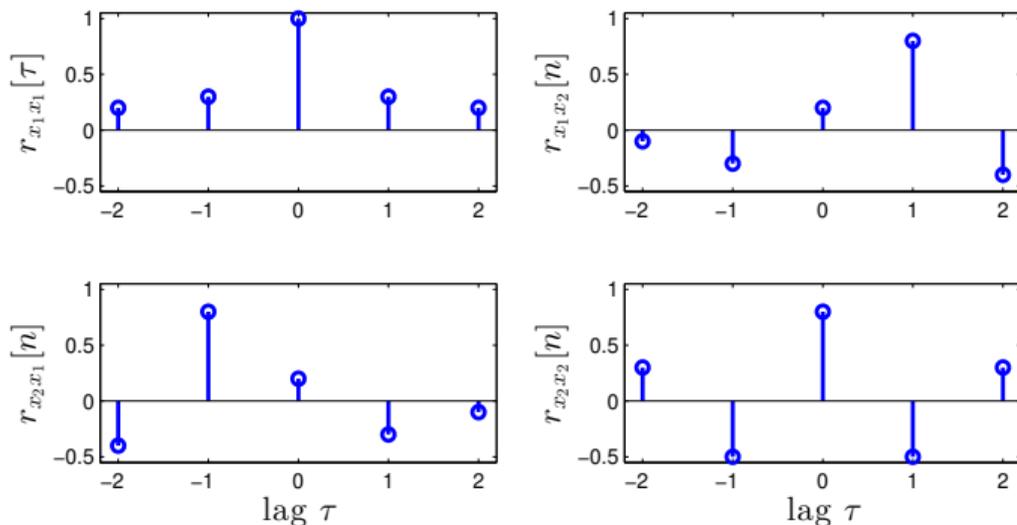


- ▶ the cross-spectral density (CSD) matrix

$$\mathbf{R}(z) \circ \mathbf{R}[\tau] \quad (16)$$


is a polynomial matrix.

# ParaHermitian Operator

- ▶ A paraHermitian operation is indicated by  $\{\cdot\}^P$ , and compared to the Hermitian transposition of a matrix additionally performs a time-reversal;
- ▶ example:

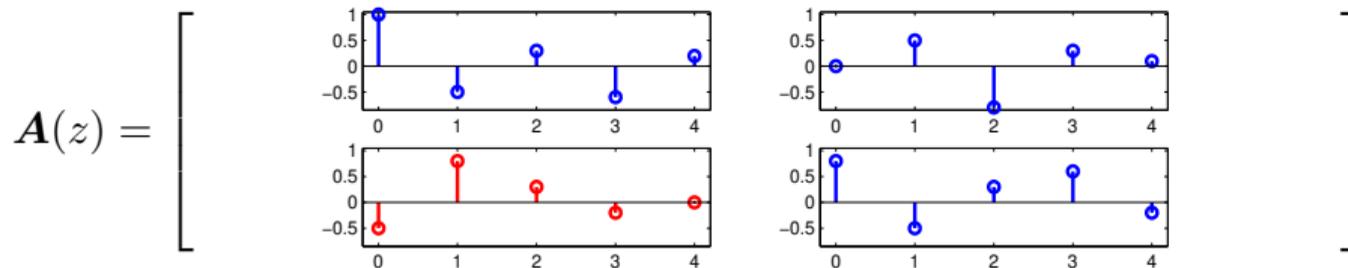


- ▶ paraHermitian  $\mathbf{A}^P(z) = \mathbf{A}^H(1/z^*)$ :

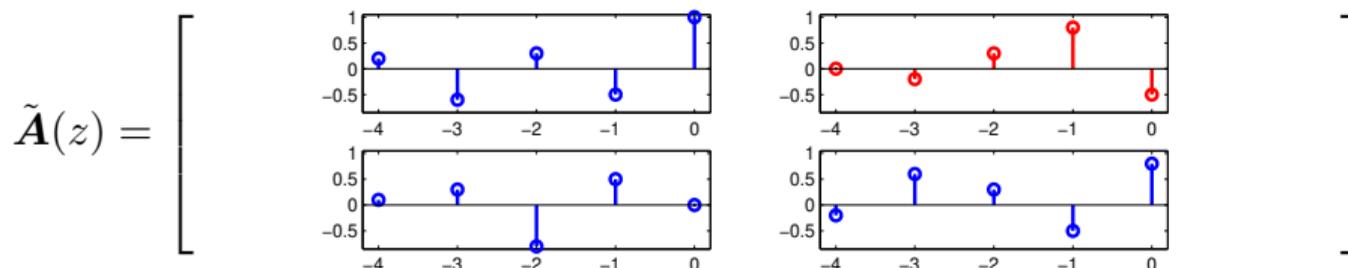

# ParaHermitian Property

- ▶ A polynomial matrix  $\mathbf{R}(z)$  is paraHermitian if  $\mathbf{R}^P(z) = \mathbf{R}^H(1/z^*) = \mathbf{R}(z)$ ;
- ▶ this is an extension of the symmetric (if  $\mathbf{R} \in \mathbb{R}$ ) or Hermitian (if  $\mathbf{R} \in \mathbb{C}$ ) property to the polynomial case: transposition, complex conjugation and time reversal (in any order) do not alter a paraHermitian  $\mathbf{R}(z)$ ;
- ▶ any CSD matrix is paraHermitian;
- ▶ example:

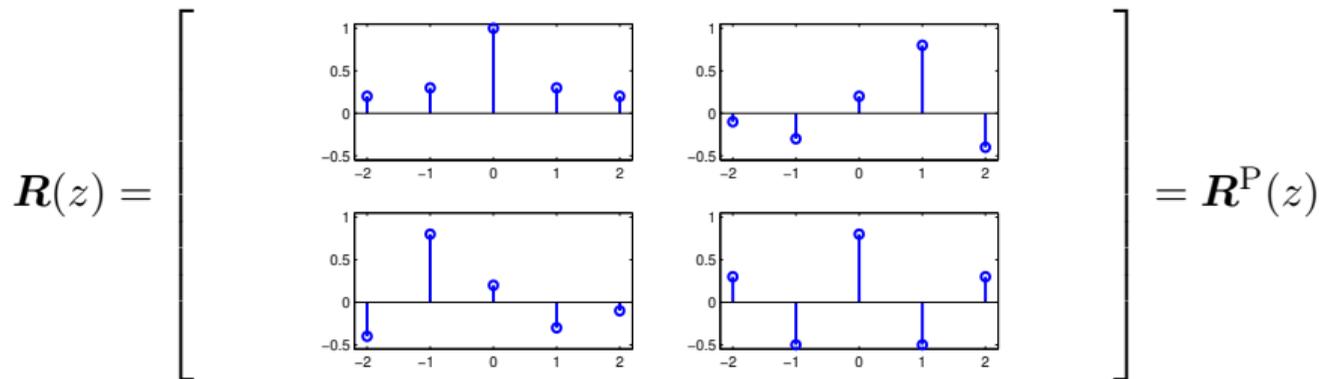

# Paraunitary Matrices



- ▶ Recall that  $\mathbf{A} \in \mathbb{C}$  (or  $\mathbf{A} \in \mathbb{R}$ ) is a unitary (or orthonormal) matrix if  $\mathbf{A}\mathbf{A}^H = \mathbf{A}^H\mathbf{A} = \mathbf{I}$ ;
- ▶ in the polynomial case,  $\mathbf{A}(z)$  is paraunitary if

$$\mathbf{A}(z)\mathbf{A}^P(z) = \mathbf{A}^P(z)\mathbf{A}(z) = \mathbf{I} \quad (17)$$

- ▶ therefore, if  $\mathbf{A}(z)$  is paraunitary, then the polynomial matrix inverse is simple:

$$\mathbf{A}^{-1}(z) = \mathbf{A}^P(z) \quad (18)$$

- ▶ example: polyphase analysis or synthesis matrices of perfectly reconstructing (or lossless) filter banks are usually paraunitary.

# Attempt of Gaussian Elimination

- ▶ System of polynomial equations:

$$\begin{bmatrix} A_{11}(z) & A_{12}(z) \\ A_{21}(z) & A_{22}(z) \end{bmatrix} \cdot \begin{bmatrix} X_1(z) \\ X_2(z) \end{bmatrix} = \begin{bmatrix} B_1(z) \\ B_2(z) \end{bmatrix} \quad (19)$$

- ▶ modification of 2nd row:

$$\begin{bmatrix} A_{11}(z) & A_{12}(z) \\ A_{11}(z) & \frac{A_{11}(z)}{A_{21}(z)}A_{22}(z) \end{bmatrix} \cdot \begin{bmatrix} X_1(z) \\ X_2(z) \end{bmatrix} = \begin{bmatrix} B_1(z) \\ \frac{A_{11}(z)}{A_{21}(z)}B_2(z) \end{bmatrix} \quad (20)$$

- ▶ upper triangular form by subtracting 1st row from 2nd:

$$\begin{bmatrix} A_{11}(z) & A_{12}(z) \\ 0 & \frac{A_{11}(z)A_{22}(z) - A_{12}(z)A_{21}(z)}{A_{21}(z)} \end{bmatrix} \cdot \begin{bmatrix} X_1(z) \\ X_2(z) \end{bmatrix} = \begin{bmatrix} B_1(z) \\ \bar{B}_2(z) \end{bmatrix} \quad (21)$$

- ▶ penalty: we end up with rational functions rather than polynomials.

## Further Reading



- ▶ General polynomial matrices and operations [52, 70, 102];
- ▶ polyphase analysis and synthesis matrices in the context of multirate systems and filter banks [122, 123, 48];
- ▶ space-time covariance matrices [123, 86, 107, 109];
- ▶ estimation of space-time covariance matrices [45, 46, 47, 65, 68].

# ParaHermitian Matrix Eigenvalue Decomposition I



- ▶ For a Hermitian matrix  $\mathbf{R} = \mathbf{R}^H$ , we know that an eigenvalue decomposition (EVD)  $\mathbf{R} = \mathbf{Q}\mathbf{\Lambda}\mathbf{Q}^H$  exists [53, 61];
- ▶ for eigenvalues  $\mathbf{\Lambda} = \text{diag}\{\lambda_1, \dots, \lambda_M\}$  and eigenvectors  $\mathbf{Q} = [\mathbf{q}_1, \dots, \mathbf{q}_M]$ :

$$\mathbf{R}\mathbf{q}_m = \lambda_m \mathbf{q}_m$$

- ▶ eigenvalues  $\lambda \in \mathbb{R}$ ;
- ▶ eigenvectors can be chosen as orthonormal, but may have an arbitrary phase shift:  $\mathbf{q}'_m = e^{j\varphi} \mathbf{q}_m$  is also an eigenvector;
- ▶ in case of an algebraic multiplicity  $C$ :  $\lambda_m = \lambda_{m+1} = \dots = \lambda_{m+C-1}$ , only a  $C$ -dimensional subspace is defined, within which the eigenvectors can form an arbitrary orthonormal basis, with any unitary  $\mathbf{V}$ :

$$[\mathbf{q}'_m, \dots, \mathbf{q}'_{m+C-1}] = [\mathbf{q}_m, \dots, \mathbf{q}_{m+C-1}] \mathbf{V}, \quad (22)$$

# ParaHermitian Matrix Eigenvalue Decomposition II



- ▶ A standard EVD can diagonalise  $\mathbf{R}(z)$  only for one specific value of  $z$  or of  $\tau$ , respectively;
- ▶ we are interested in the EVD of a paraHermitian matrix  $\mathbf{R}(z)$  such that

$$\mathbf{R}(z) = \mathbf{Q}(z) \mathbf{\Lambda}(z) \mathbf{Q}^P(z), \quad (23)$$


- ▶  $\mathbf{Q}(z) = [\mathbf{q}_1(z), \dots, \mathbf{q}_M(z)]$  must be paraunitary, such that

$$\mathbf{Q}(z)\mathbf{Q}^P(z) = \mathbf{Q}^P(z)\mathbf{Q}(z) = \mathbf{I}; \quad (24)$$

- ▶  $\mathbf{\Lambda}(z) = \text{diag}\{\lambda_1(z), \dots, \lambda_M\}$  must be diagonal and paraHermitian;
- ▶ the paraHermitian property implies that on the unit circle,  $\lambda(e^{j\Omega}) = \lambda(z)|_{z=e^{j\Omega}} \in \mathbb{R}$ ;
- ▶ we call (23) a **paraHermitian matrix EVD**.

## Analyticity of $\mathbf{R}(z)$

- ▶ The analyticity of  $\mathbf{R}(z) = \mathcal{E}\{\mathbf{x}[n]\mathbf{x}^H[n - \tau]\}$  can be tied to a source model [107, 134]

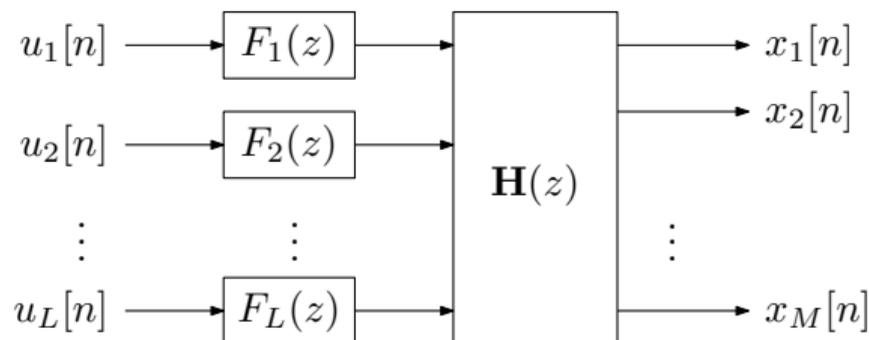

- ▶ the innovation filters  $F_\ell(z)$ ,  $\ell = 1, \dots, L$  describe the spectral shape of the  $L$  contributing source signals;
- ▶ a convolutive mixing system  $\mathbf{H}(z) : \mathbb{C} \rightarrow \mathbb{C}^{M \times N}$  models the transfer paths between the  $L$  sources and  $M$  sensors;
- ▶ if  $F_\ell(z)$  and  $\mathbf{H}(z)$  are stable and causal, then  $\mathbf{R}(z) = \mathbf{H}(z)\mathbf{F}(z)\mathbf{F}^P(z)\mathbf{H}^P(z)$  is analytic.

# Analytic EVD

- ▶ Franz Rellich (1939, [110]) for a self-adjoint, analytic  $\mathbf{R}(t) = \mathbf{R}^H(t)$ ,  $t \in \mathbb{R}$ :

$$\mathbf{R}(t) = \mathbf{Q}(t)\mathbf{\Lambda}(t)\mathbf{Q}^H(t) ;$$

- ▶  $\mathbf{Q}(t)$  and  $\mathbf{\Lambda}(t)$  can be chosen analytic;

- ▶ similarly for an arbitrary (i.e. not necessarily Hermitian or square) analytic matrix, de Moor & Boyd (1989, [44]) and Bunse-Gerstner (1991, [20]) established an analytic SVD.



- ▶ Analyticity:  $\mathbf{R}(z)$  is uniquely defined by its representation on the unit circle,  $\mathbf{R}(e^{j\Omega}) = \mathbf{R}(z)|_{z=e^{j\Omega}}$ ;
- ▶  $\mathbf{R}(e^{j\Omega})$  is self-adjoint:  $\mathbf{R}(e^{j\Omega}) = \mathbf{R}^H(e^{j\Omega})$ , i.e. Hermitian for every  $\Omega$ ;
- ▶ EVD on the unit circle:

$$\mathbf{R}(e^{j\Omega}) = \mathbf{Q}(\Omega) \cdot \mathbf{\Lambda}(\Omega) \cdot \mathbf{Q}^H(\Omega) . \quad (25)$$

- ▶ for every  $\Omega$ ,  $\mathbf{Q}(\Omega)$  and  $\mathbf{\Lambda}(\Omega)$  fulfill the properties of the EVD;
- ▶ (25) is covered by Rellich [110];
- ▶  $\mathbf{R}(e^{j\Omega})$  is  $2\pi$ -periodic, but the same periodicity cannot be guaranteed for  $\mathbf{Q}(\Omega)$  and  $\mathbf{\Lambda}(\Omega)$  [135].

# Matrix Perturbation Theory

- ▶ Intuitive explanation of Rellich [110]: if we know that  $\mathbf{R}(e^{j\Omega})$  varies smoothly, what can be said about  $\mathbf{Q}(\Omega)$  and  $\mathbf{\Lambda}(\Omega)$ ?
- ▶ eigenvalues (Hoffman-Wielandt, 1953, [61]):

$$\sum_i |\lambda_i(\Omega) - \lambda_i(\Omega + \Delta\Omega)| \leq \|\mathbf{R}(e^{j\Omega}) - \mathbf{R}(e^{j(\Omega+\Delta\Omega)})\|_F, \quad (26)$$

- ▶ subspace distance for eigenvectors / eigenspaces (Golub & van Loan, [53]):

$$\mathbf{Q}^H(\Omega) \left( \mathbf{R}(e^{j(\Omega+\Delta\Omega)}) - \mathbf{R}(e^{j\Omega}) \right) \mathbf{Q}(\Omega) = \begin{bmatrix} \mathbf{E}_{11}(e^{j\Omega}, \Delta\Omega) & \mathbf{E}_{21}^H(e^{j\Omega}, \Delta\Omega) \\ \mathbf{E}_{21}(e^{j\Omega}, \Delta\Omega) & \mathbf{E}_{22}(e^{j\Omega}, \Delta\Omega) \end{bmatrix}. \quad (27)$$

$\underbrace{\hspace{10em}}_C \qquad \underbrace{\hspace{10em}}_{M-C}$

$$\text{dist}\{\mathcal{Q}_1(\Omega), \mathcal{Q}_1(\Omega + \Delta\Omega)\} \leq \frac{4}{\delta} \|\mathbf{E}_{21}(e^{j\Omega}, \Delta\Omega)\|_F. \quad (28)$$

## Existence and Uniqueness of an Analytic PhEVD

- ▶ If  $\mathbf{R}(z) \bullet \circ \mathcal{E}\{\mathbf{x}[n]\mathbf{x}^H[n - \tau]\}$  is analytic, and the data  $\mathbf{x}[n]$  does not originate from a multiplexing operation, then we have

$$\mathbf{R}(e^{j\Omega}) = \mathbf{Q}(e^{j\Omega}) \cdot \mathbf{\Lambda}(e^{j\Omega}) \cdot \mathbf{Q}^H(e^{j\Omega}) ; \quad (29)$$

- ▶ the factors  $\mathbf{Q}(e^{j\Omega})$  and  $\mathbf{\Lambda}(e^{j\Omega})$  are analytic in  $e^{j\Omega}$ ;
- ▶ therefore,  $\mathbf{Q}[n] \circ \bullet \mathbf{Q}(e^{j\Omega})$  and  $\mathbf{\Lambda}[\tau] \circ \bullet \mathbf{\Lambda}(e^{j\Omega})$  are absolutely convergent;
- ▶ we can reparameterise (29) as [134]

$$\mathbf{R}(z) = \mathbf{Q}(z) \cdot \mathbf{\Lambda}(z) \cdot \mathbf{Q}^P(z) ; \quad (30)$$

- ▶ the eigenvalues in  $\mathbf{\Lambda}(z)$  are unique up to a permutation;
- ▶ if eigenvalues are distinct, then eigenvectors are unique up to an allpass filter  $\Psi_\ell(z)$ ;
- ▶ with  $\mathbf{\Psi}(z) = \text{diag}\{\Psi_1(z), \dots, \Psi_M(z)\}$ ,

$$\mathbf{R}(z) = \mathbf{Q}(z)\mathbf{\Psi}(z)\mathbf{\Lambda}(z)\mathbf{\Psi}^P(z)\mathbf{Q}^P(z) = \mathbf{Q}(z)\mathbf{\Lambda}(z)\mathbf{\Psi}(z)\mathbf{\Psi}^P(z)\mathbf{Q}^P(z) = \mathbf{Q}(z)\mathbf{\Lambda}(z)\mathbf{Q}^P(z) .$$

## Numerical Example for a 2x2 Matrix

- ▶ Consider the parahermitian matrix  $\mathbf{R}(z) = \mathbf{U}(z)\mathbf{\Gamma}(z)\mathbf{U}^P(z)$ :

$$\mathbf{R}(z) = \begin{bmatrix} \frac{1-j}{2}z + 3 + \frac{1+j}{2}z^{-1} & \frac{1+j}{2}z^2 + \frac{1-j}{2} \\ \frac{1+j}{2} + \frac{1-j}{2}z^{-2} & \frac{1-j}{2}z + 3 + \frac{1+j}{2}z^{-1} \end{bmatrix}; \quad (31)$$

- ▶ it can be shown that for the eigenvalues,


$$\mathbf{\Lambda}(z) = \begin{bmatrix} z + 3 + z^{-1} & \\ & -jz + 3 + jz^{-1} \end{bmatrix}; \quad (32)$$

- ▶ for the eigenvectors, one possible solution is


$$\mathbf{U}(z) = [\mathbf{u}_1(z), \mathbf{u}_2(z)] \quad \text{with} \quad \mathbf{u}_{1,2}(z) = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ \pm z^{-1} \end{bmatrix}; \quad (33)$$

- ▶ we'll evaluate on the unit circle, and for the eigenvectors inspect the Hermitian angle  $\cos \varphi_m = |\mathbf{q}_1^H(e^{j0}) \cdot \mathbf{q}_m(e^{j\Omega})|$ .

# Numerical Example for a 2x2 Matrix cont'd

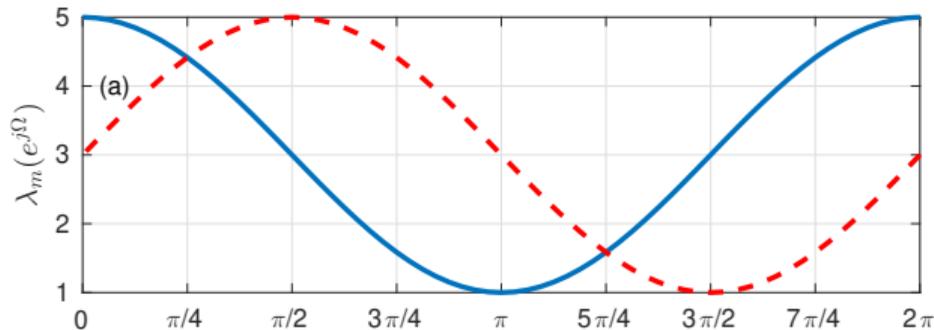

▶ eigenvalues  $\Lambda(e^{j\Omega}) = \text{diag}\{\lambda_1(e^{j\Omega}) \lambda_M(e^{j\Omega})\};$

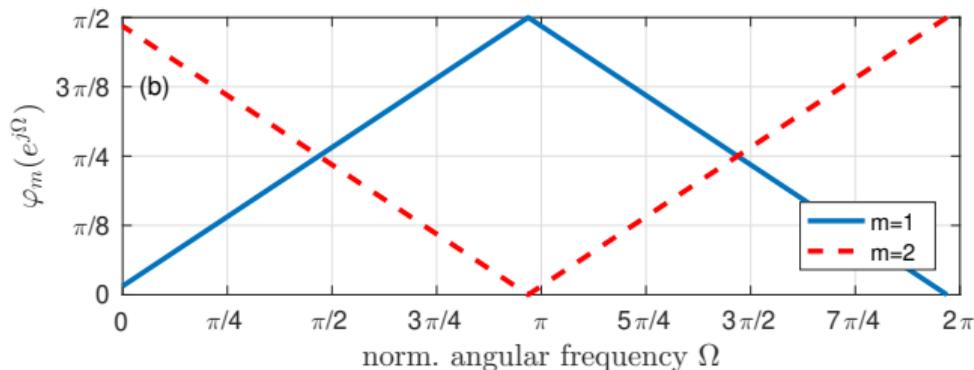

▶ Hermitian angles  $\cos \varphi_m = |\mathbf{q}_1^H(e^{j0}) \cdot \mathbf{q}_m(e^{j\Omega})|.$

# Non-Existence of an Analytic PhEVD


- ▶ Recall due to Rellich [110]

$$\mathbf{R}(e^{j\Omega}) = \mathbf{Q}(\Omega) \cdot \mathbf{\Lambda}(\Omega) \cdot \mathbf{Q}^H(\Omega) ; \quad (34)$$

- ▶ if  $\mathbf{R}(z) \bullet \circ \mathcal{E}\{\mathbf{x}[n]\mathbf{x}^H[n - \tau]\}$  is analytic, but the data  $\mathbf{x}[n]$  is  $K$ -fold multiplexed, then  $\mathbf{Q}(\Omega)$  and  $\mathbf{\Lambda}(\Omega)$  will be  $2K\pi$  periodic;

- ▶ as such, we can only find an analytic EVD if  $\mathbf{R}(z)$  is  $K$ -fold oversampled [135]:

$$\mathbf{R}(z^K) = \mathbf{Q}(z)\mathbf{\Lambda}(z)\mathbf{Q}^P(z) . \quad (35)$$

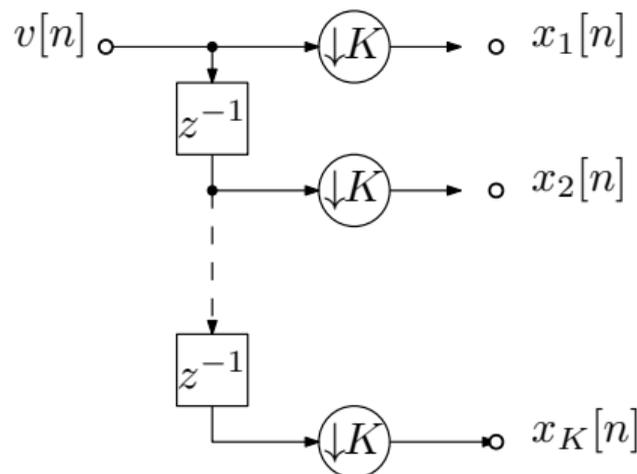


## Numerical Example

- ▶ Consider the analytic CSD matrix [121, 33]

$$\mathbf{R}(z) = \begin{bmatrix} 2 & 1 + z^{-1} \\ z + 1 & 2 \end{bmatrix}; \quad (36)$$


- ▶ this is a pseudo-circulant system [123] that can be created by the following multiplexing operation with uncorrelated  $u[n] \in \mathcal{N}(0, 1)$ :

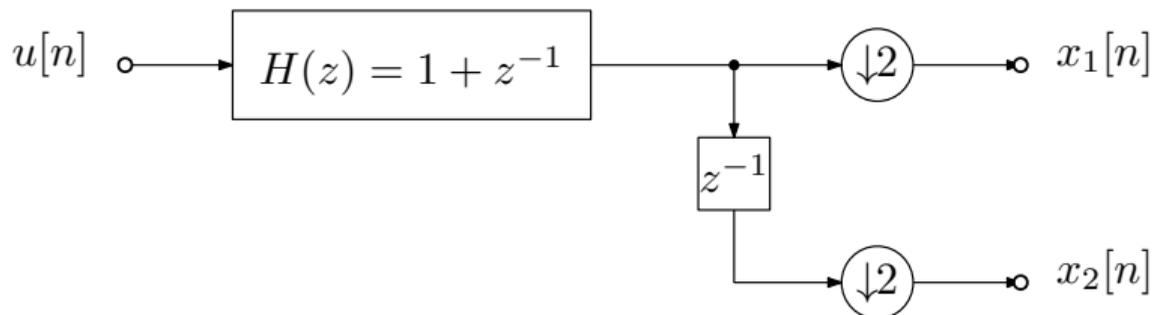

## Numerical Example cont'd

- We can find

$$\mathbf{R}(z) = \frac{1}{2} \begin{bmatrix} 1 & -1 \\ z^{-\frac{1}{2}} & z^{-\frac{1}{2}} \end{bmatrix} \begin{bmatrix} z^{\frac{1}{2}} + 2 + z^{-\frac{1}{2}} & \\ & -z^{\frac{1}{2}} + 2 - z^{-\frac{1}{2}} \end{bmatrix} \begin{bmatrix} 1 & z^{\frac{1}{2}} \\ -1 & z^{\frac{1}{2}} \end{bmatrix}; \quad (37)$$

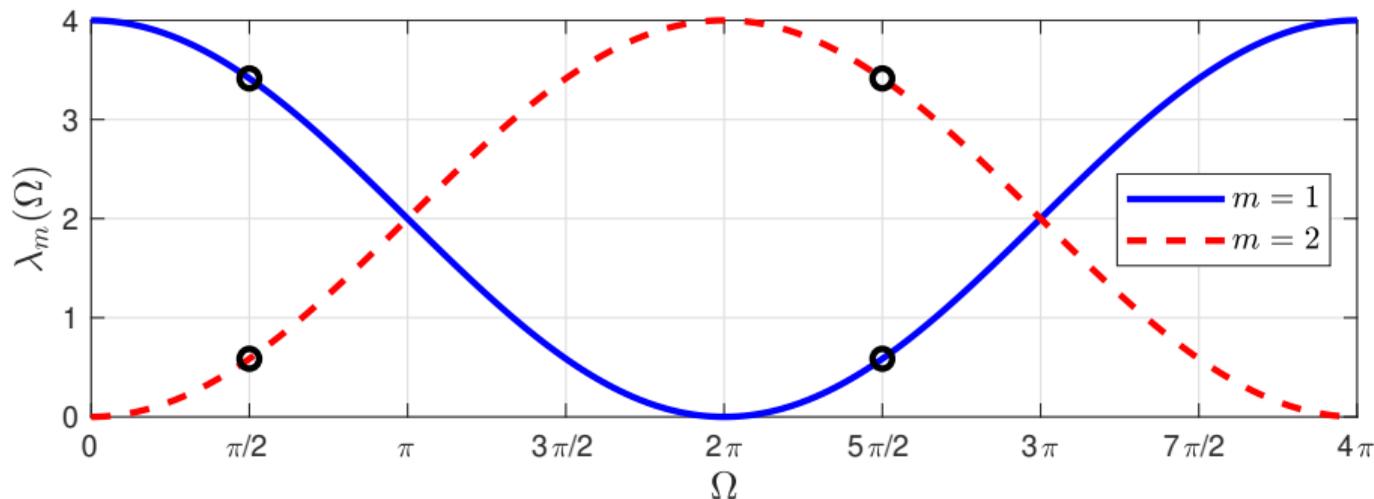

- note that the eigenvalues are modulated versions of each other.
- fractional powers of  $z$  are not analytic — we need to oversample by two.

## Exact Calculation for a $2 \times 2$ Matrix

- ▶ Given an arbitrary parahermitian  $\mathbf{R}(z) \in \mathbb{C}^{2 \times 2}$ ;
- ▶ eigenvalues  $\gamma_{1,2}(z)$  can be directly computed in the  $z$ -domain as the roots of

$$\det\{\gamma(z)\mathbf{I} - \mathbf{R}(z)\} = \gamma^2(z) - T(z)\gamma(z) + D(z) = 0$$

- ▶ determinant  $D(z) = \det\{\mathbf{R}(z)\}$  and trace  $T(z) = \text{trace}\{\mathbf{R}(z)\}$ ;
- ▶ this leads to

$$\gamma_{1,2}(z) = \frac{1}{2}T(z) \pm \frac{1}{2}\sqrt{T(z)T^P(z) - 4D(z)}; \quad (38)$$

- ▶ awkward:  $T(z)T^P(z) - 4D(z) = S(z)S^P(z)$  is parahermitian, but so must be the result of the square root.

## Exact Calculation cont'd

- ▶ Maclaurin series: for every root of  $S(z)$ ,

$$\sqrt{1 - \beta z^{-1}} = \sum_{n=0}^{\infty} \xi_n \beta^n z^{-n} \quad (39)$$

$$\frac{1}{\sqrt{1 - \alpha z^{-1}}} = \left( \sum_{n=0}^{\infty} \xi_n \alpha^n z^{-n} \right)^{-1} = \sum_{n=0}^{\infty} \chi_n \alpha^n z^{-n} \quad (40)$$


- ▶ with coefficients

$$\xi_n = (-1)^n \binom{\frac{1}{2}}{n} = \frac{(-1)^n}{n!} \prod_{i=0}^{n-1} \left( \frac{1}{2} - i \right), \quad (41)$$

$$\chi_n = (-1)^n \binom{-\frac{1}{2}}{n} = \frac{(-1)^{n-1}}{n!} \prod_{i=0}^{n-1} \left( \frac{1}{2} + i \right). \quad (42)$$


# Maclaurin Series

- Coefficients  $\xi_n$  and  $\chi_n$  for  $n = 0 \dots 50$ :

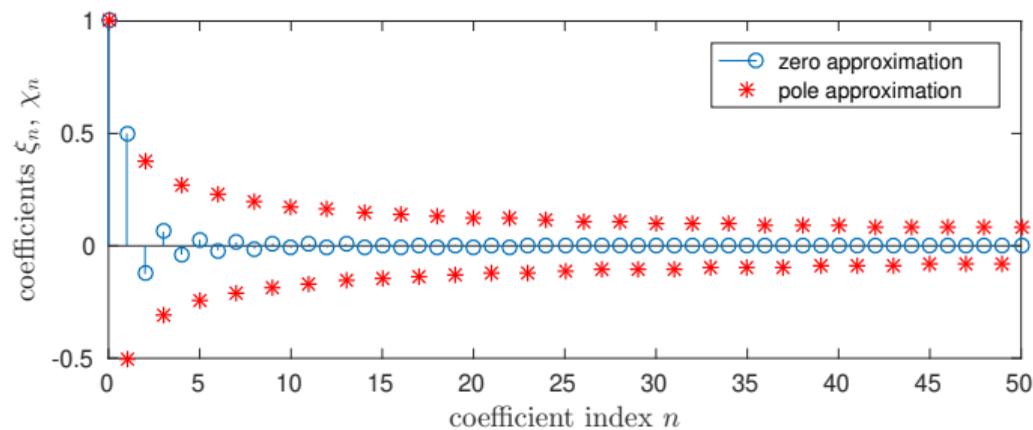

- these coefficients additionally dampen a geometric series;
- only if  $S(z)$  has double zeros (and double poles) is a polynomial (rational) solution possible;
- in general, the result are transcendental eigenvalues.

# Numerical Example

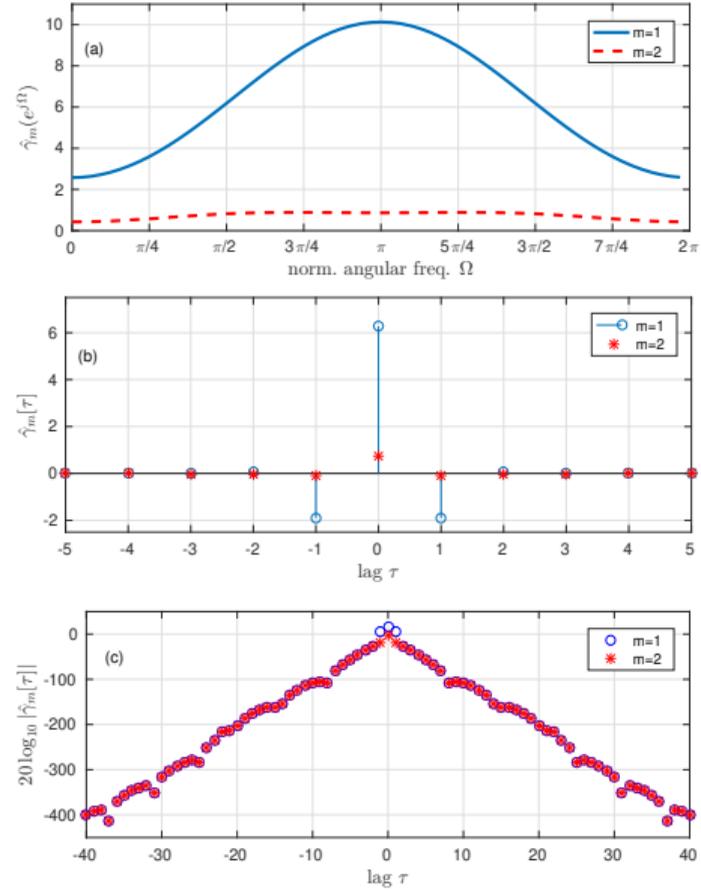

► Example from Icart & Comon (2012, [59]):

$$\mathbf{R}(z) = \begin{bmatrix} 1 & 1 \\ 1 & -2z + 6 - 2z^{-1} \end{bmatrix}$$



- (a) solution on unit circle;
- (b) coefficients of analytic eigenvalues;
- (c) decay of coefficients.
- solution generally can be transcendental, i.e. neither finite nor rational!

# Polynomial Eigenvalue Decomposition

- ▶ Polynomial EVD or McWhirter decomposition [86] of the CSD matrix

$$\mathbf{R}(z) \approx \mathbf{U}(z) \mathbf{\Gamma}(z) \mathbf{U}^P(z) \quad (43)$$

- ▶ with paraunitary, polynomial  $\mathbf{U}(z)$ , s.t.  $\mathbf{U}(z)\mathbf{U}^P(z) = \mathbf{I}$ ;
- ▶ diagonalised and spectrally majorised Laurent polynomial  $\mathbf{\Gamma}(z)$ :

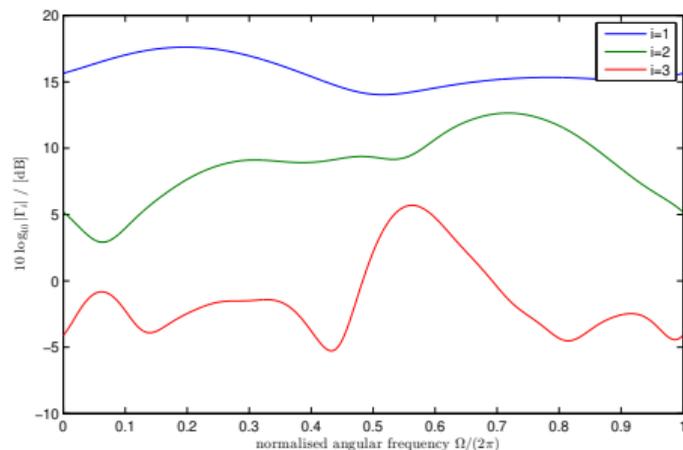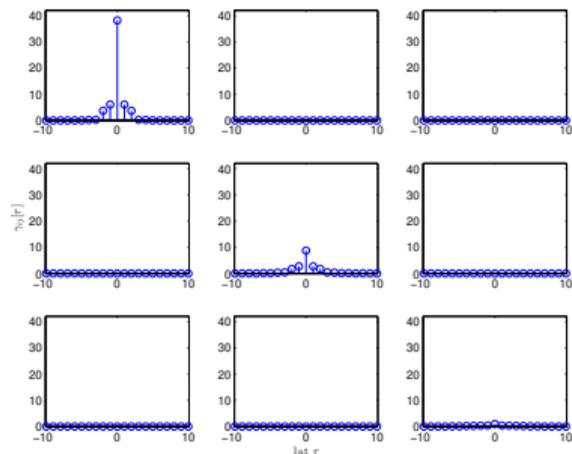

## Numerical Example

- ▶ We return to the previous example of a parahermitian matrix:



$$\mathbf{\Lambda}(z) = \begin{bmatrix} z + 3 + z^{-1} & \\ & -jz + 3 + jz^{-1} \end{bmatrix}$$

$$\mathbf{Q}(z) = [\mathbf{q}_1(z), \mathbf{q}_2(z)] \quad \text{with} \quad \mathbf{q}_{1,2}(z) = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ \pm z^{-1} \end{bmatrix};$$

- ▶ parahermitian matrix  $\mathbf{R}(z) = \mathbf{Q}(z)\mathbf{\Lambda}(z)\mathbf{Q}^P(z)$ :

$$\mathbf{R}(z) = \begin{bmatrix} \frac{1-j}{2}z + 3 + \frac{1+j}{2}z^{-1} & \frac{1+j}{2}z^2 + \frac{1-j}{2} \\ \frac{1+j}{2} + \frac{1-j}{2}z^{-2} & \frac{1-j}{2}z + 3 + \frac{1+j}{2}z^{-1} \end{bmatrix}.$$



# Numerical Example — Analytic Solution

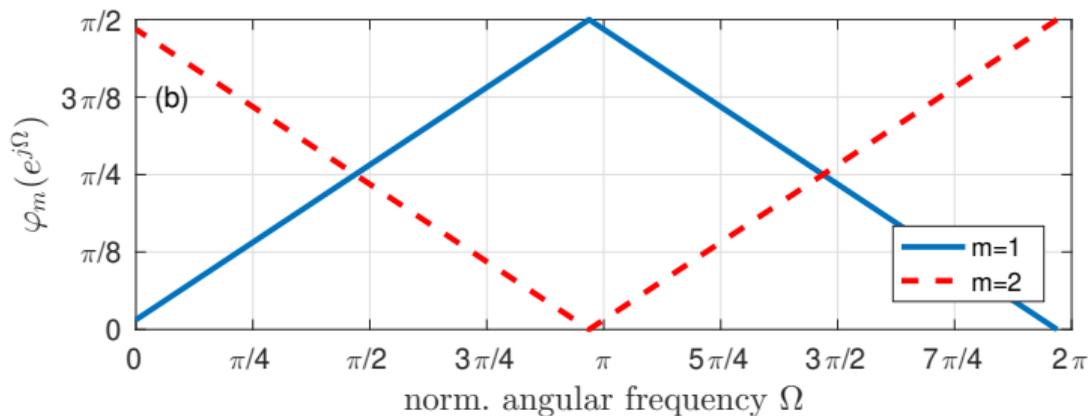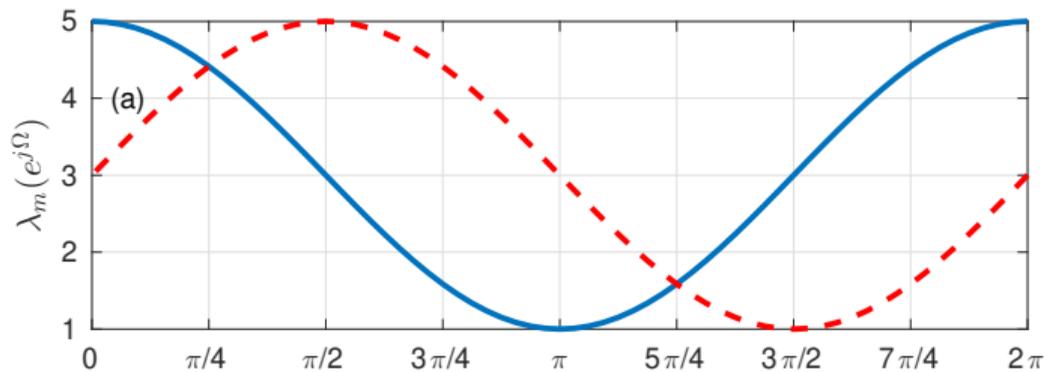

- ▶ Recall from earlier:
- ▶ analytic (and therefore infinitely differentiable) eigenvalues  $\lambda_m(e^{j\Omega})$ ;
- ▶ smooth Hermitian angles



$$\cos \varphi_m = |\mathbf{q}_1^H(e^{j0}) \cdot \mathbf{q}_m(e^{j\Omega})|.$$

# Numerical Example — Ideal Spectral Majorisation

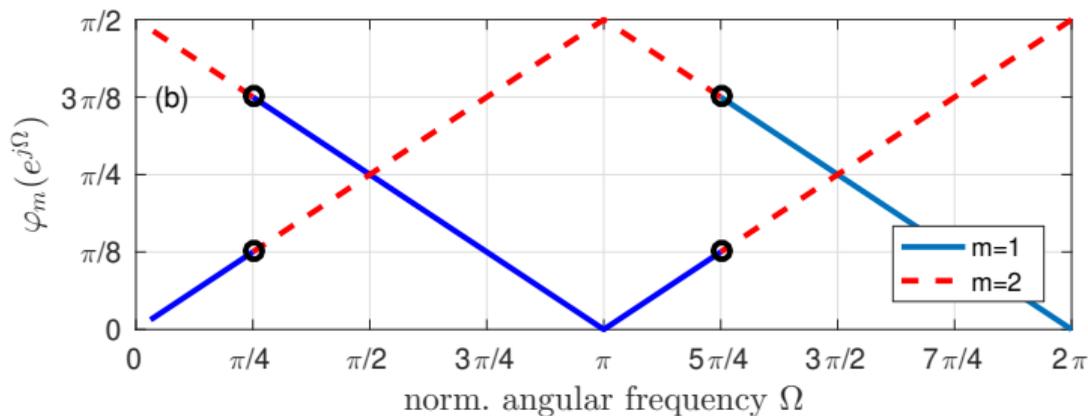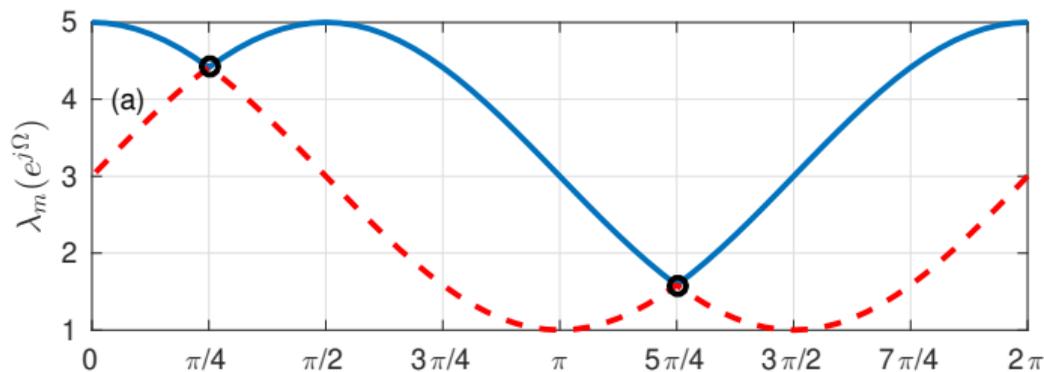

- ▶ Analytic eigenvalues are permuted where they intersect;
- ▶ resulting spectrally majorised eigenvalues are piecewise analytic but not differentiable;
- ▶ corresponding eigenvectors are piecewise analytic but not continuous.

# Numerical Example — PEVD Algorithmic Solution

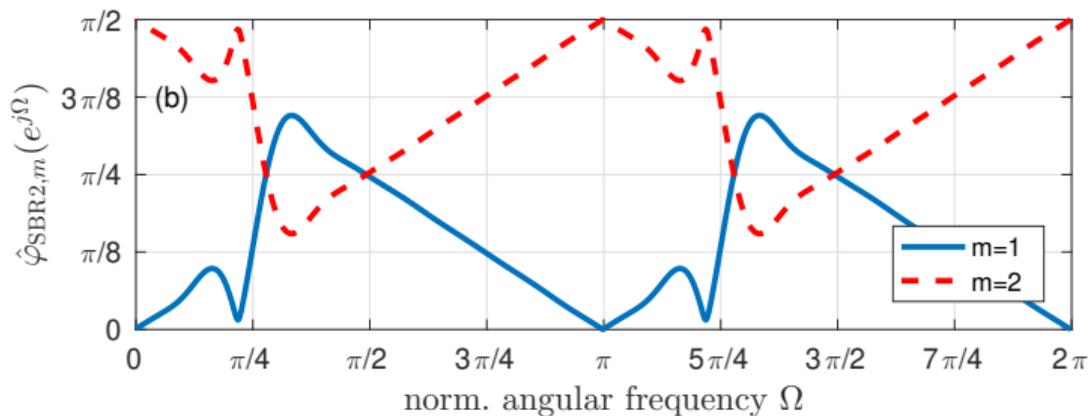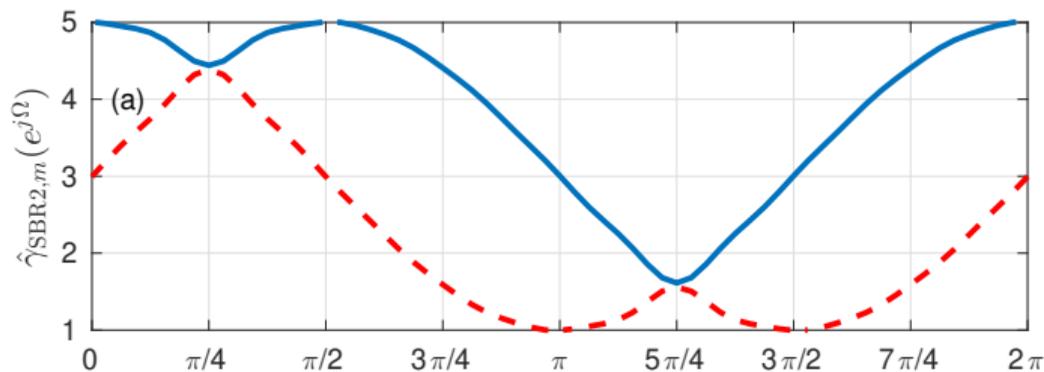

- ▶ Using the SBR2 algorithm in [86] to approximate the McWhirter factorisation;
- ▶ spectrally majorised eigenvalues  $\mathbf{\Gamma}(z)$  of order 24;
- ▶ corresponding eigenvectors in  $\mathbf{U}(z)$  of order 84.

## Further Reading



- ▶ For the existence and uniqueness of analytic eigenvalues and eigenvectors, please see [134, 135, 17];
- ▶ McWhirter decomposition [85, 86, 107, 109, 108].
- ▶ guaranteed spectral majorisation [86].

## Iterative PEVD Algorithms

- ▶ Second order sequential best rotation (SBR2, McWhirter 2007, [86]);
- ▶ iterative approach based on an elementary paraunitary operation:

$$\begin{aligned} \mathbf{S}^{(0)}(z) &= \mathbf{R}(z) \\ &\vdots \\ \mathbf{S}^{(i+1)}(z) &= \tilde{\mathbf{H}}^{(i+1)}(z)\mathbf{S}^{(i)}(z)\mathbf{H}^{(i+1)}(z) \end{aligned}$$

- ▶  $\mathbf{H}^{(i)}(z)$  is an elementary paraunitary operation, which at the  $i$ th step eliminates the largest off-diagonal element in  $\mathbf{s}^{(i-1)}(z)$ ;
- ▶ stop after  $L$  iterations:

$$\hat{\mathbf{\Lambda}}(z) = \mathbf{S}^{(L)}(z) \quad , \quad \mathbf{Q}(z) = \prod_{i=1}^L \mathbf{H}^{(i)}(z)$$

- ▶ sequential matrix diagonalisation (SMD) and
- ▶ multiple-shift SMD (MS-SMD) will follow the same scheme ...

# Elementary Paraunitary Operation

- ▶ An elementary paraunitary matrix [123] is defined as

$$\mathbf{H}^{(i)}(z) = \mathbf{I} - \mathbf{v}^{(i)}\mathbf{v}^{(i),H} + z^{-1}\mathbf{v}^{(i)}\mathbf{v}^{(i),H}, \quad \|\mathbf{v}^{(i)}\|_2 = 1$$

- ▶ we utilise a different definition:

$$\mathbf{H}^{(i)}(z) = \mathbf{D}^{(i)}(z)\mathbf{Q}^{(i)}$$


- ▶  $\mathbf{D}^{(i)}(z)$  is a delay matrix:

$$\mathbf{D}^{(i)}(z) = \text{diag}\{1 \dots 1 z^{-\tau} 1 \dots 1\}$$

- ▶  $\mathbf{Q}^{(i)}(z)$  is a Givens rotation.


# Sequential Best Rotation Algorithm (McWhirter [148])

- ▶ At iteration  $i$ , consider  $\mathcal{S}^{(i-1)}(z) \circ \bullet \mathbf{S}^{(i-1)}[\tau]$

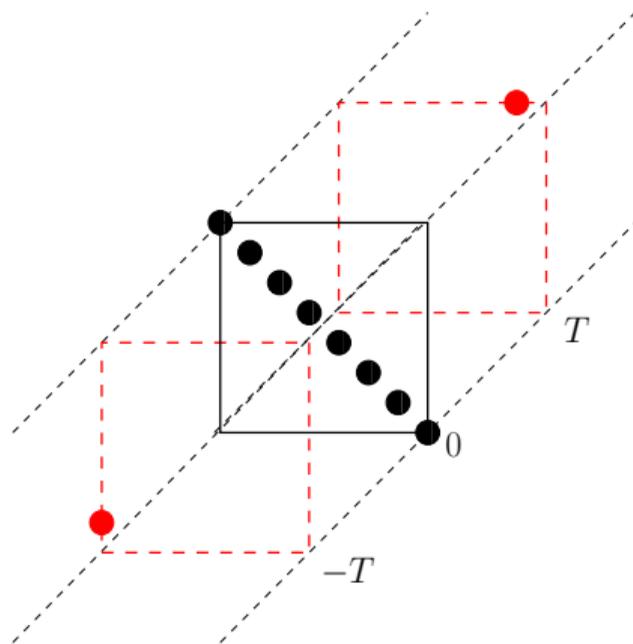


# Sequential Best Rotation Algorithm (McWhirter [148])

►  $\tilde{D}^{(i)}(z)S^{(i-1)}(z)D^{(i)}(z)$

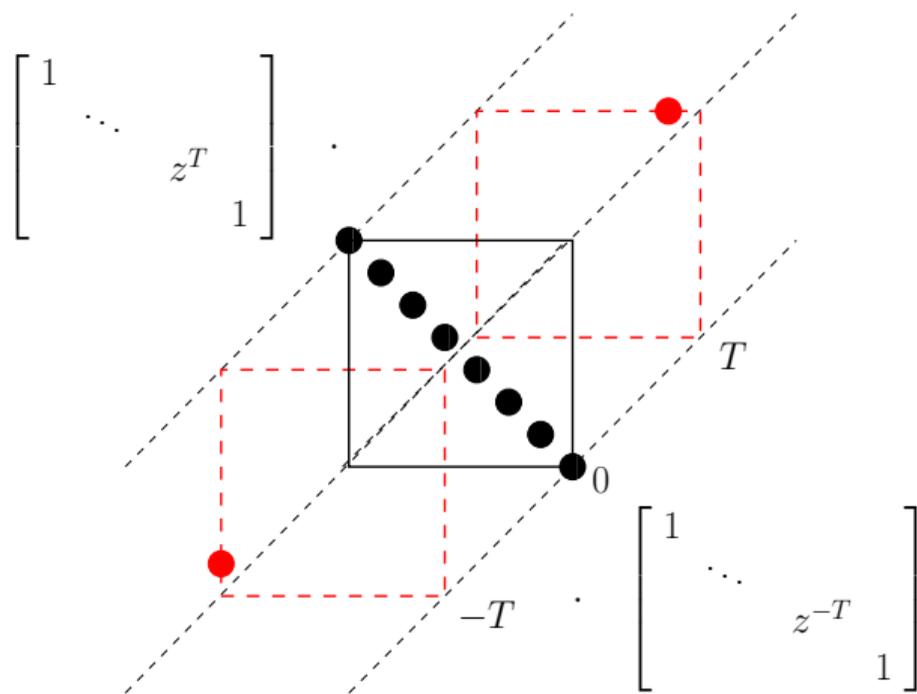


# Sequential Best Rotation Algorithm (McWhirter [148])

- ▶  $\tilde{D}^{(i)}(z)$  advances a row-slice of  $S^{(i-1)}(z)$  by  $T$

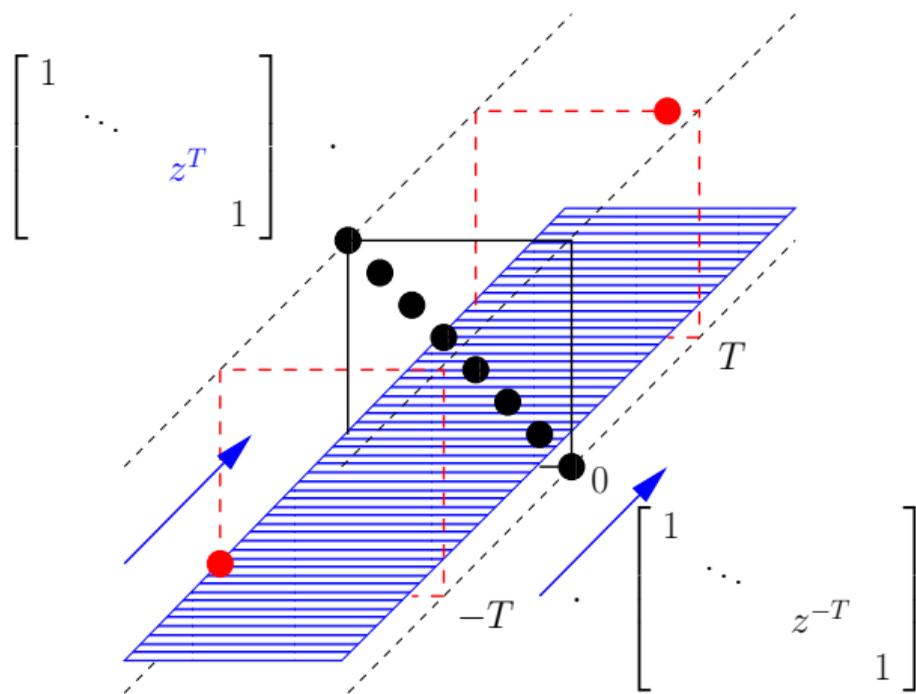

# Sequential Best Rotation Algorithm (McWhirter [148])


- ▶ the off-diagonal element at  $-T$  has now been translated to lag zero

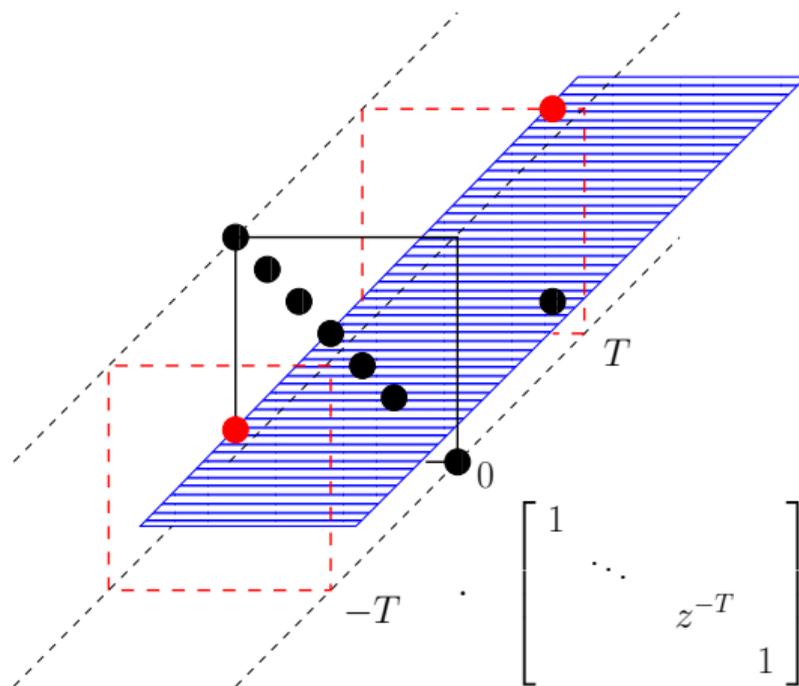

$$\begin{bmatrix} 1 & & & \\ & \ddots & & \\ & & z^{-T} & \\ & & & 1 \end{bmatrix}$$


# Sequential Best Rotation Algorithm (McWhirter [148])

- ▶  $\mathbf{D}^{(i)}(z)$  delays a column-slice of  $\mathbf{S}^{(i-1)}(z)$  by  $T$

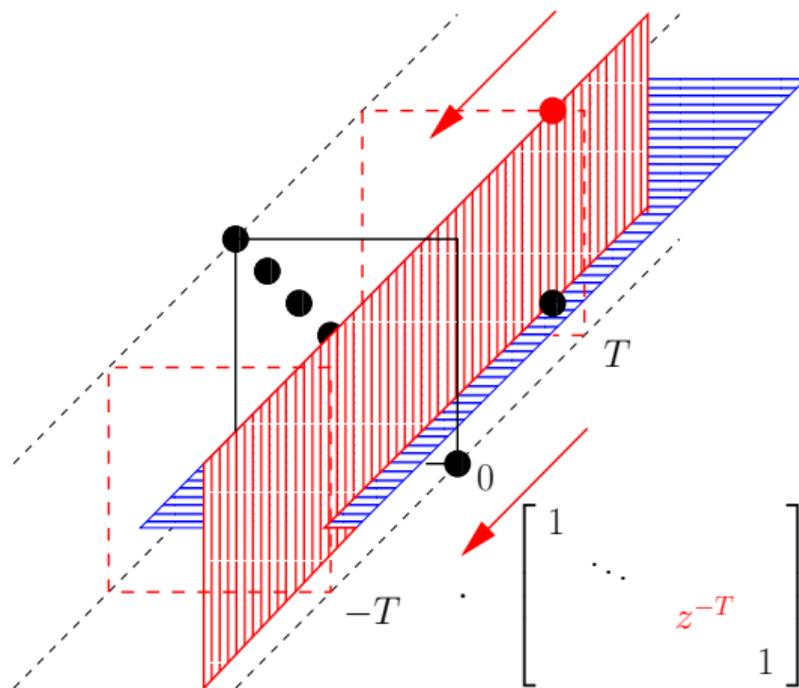


# Sequential Best Rotation Algorithm (McWhirter [148])

- ▶ the off-diagonal element at  $-T$  has now been translated to lag zero

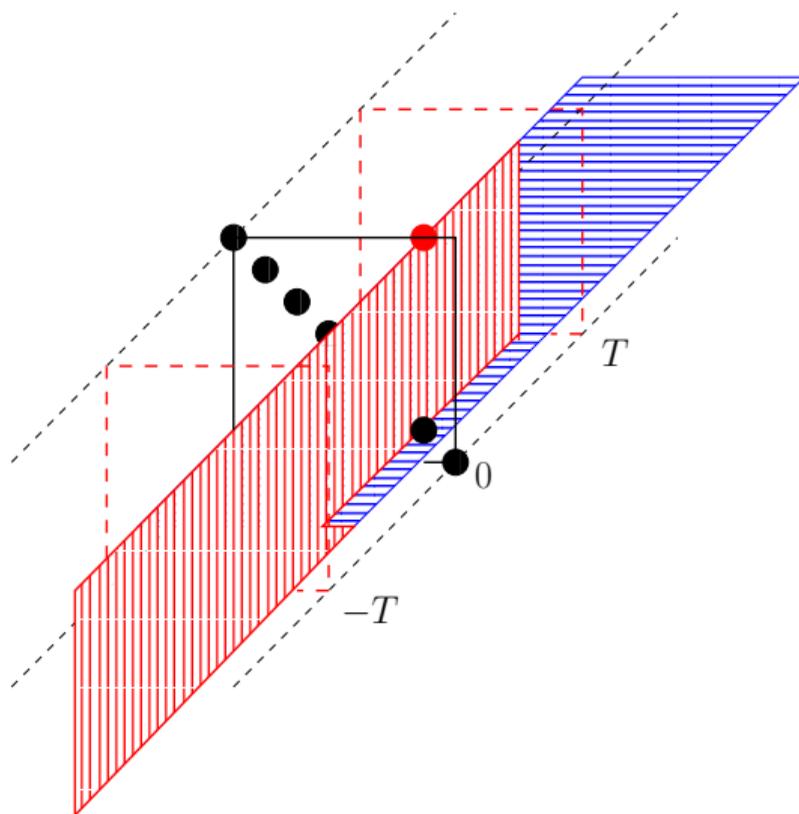


# Sequential Best Rotation Algorithm (McWhirter [148])

- ▶ the step  $\tilde{D}^{(i)}(z)\mathbf{S}^{(i-1)}(z)\mathbf{D}_{(i)}(z)$  has brought the largest off-diagonal elements to lag 0.

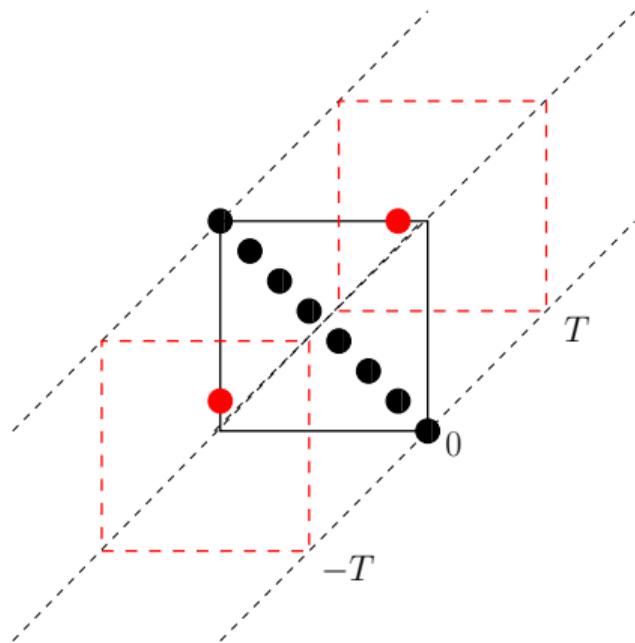

# Sequential Best Rotation Algorithm (McWhirter [148])


- Jacobi step to eliminate largest off-diagonal elements by  $Q^{(i)}$

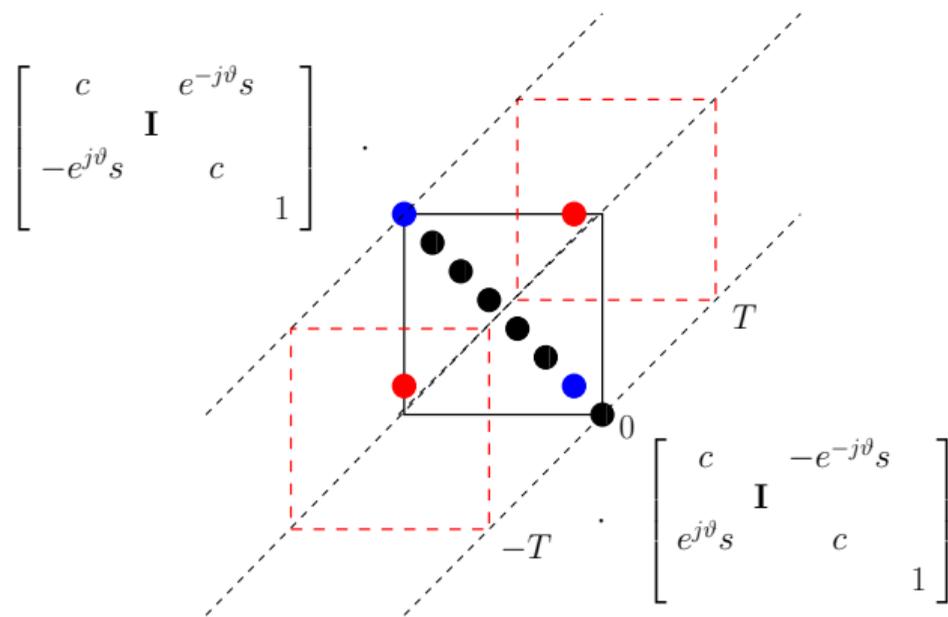

# Sequential Best Rotation Algorithm (McWhirter [148])

- iteration  $i$  is completed, having performed

$$\mathbf{S}^{(i)}(z) = \mathbf{Q}^{(i)} \mathbf{D}^{(i)}(z) \mathbf{S}^{(i-1)}(z) \tilde{\mathbf{D}}^{(i)}(z) \tilde{\mathbf{Q}}^{(i)}(z)$$

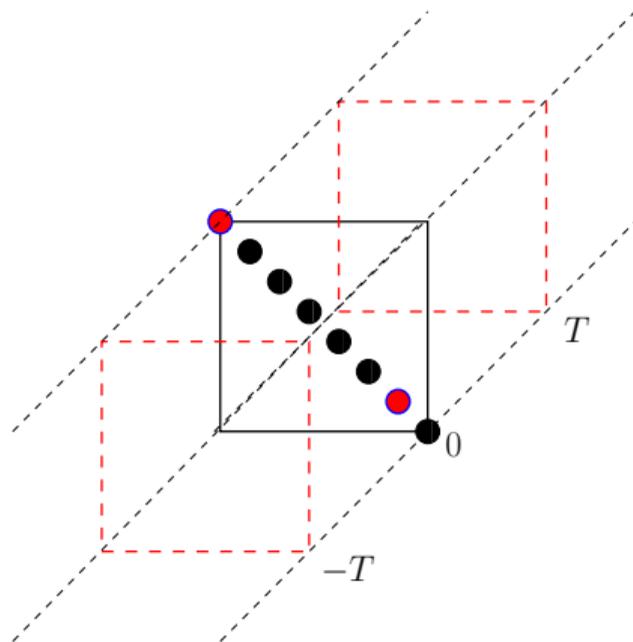

- ▶ At the  $i$ th iteration, the zeroing of off-diagonal elements achieved during previous steps may be partially undone;
- ▶ however, the algorithm has been shown to converge, transferring energy onto the main diagonal at every step (McWhirter 2007);
- ▶ after  $L$  iterations, we reach an approximate diagonalisation


$$\hat{\mathbf{A}}(z) = \mathbf{S}^{(L)}(z) = \tilde{\mathbf{Q}}(z)\mathbf{R}(z)\mathbf{Q}(z)$$

with

$$\mathbf{Q}(z) = \prod_{i=1}^L \mathbf{D}^{(i)}(z)\mathbf{Q}^{(i)}$$


- ▶ diagonalisation of the previous  $3 \times 3$  polynomial matrix ...

# SBR2 Example — Diagonalisation

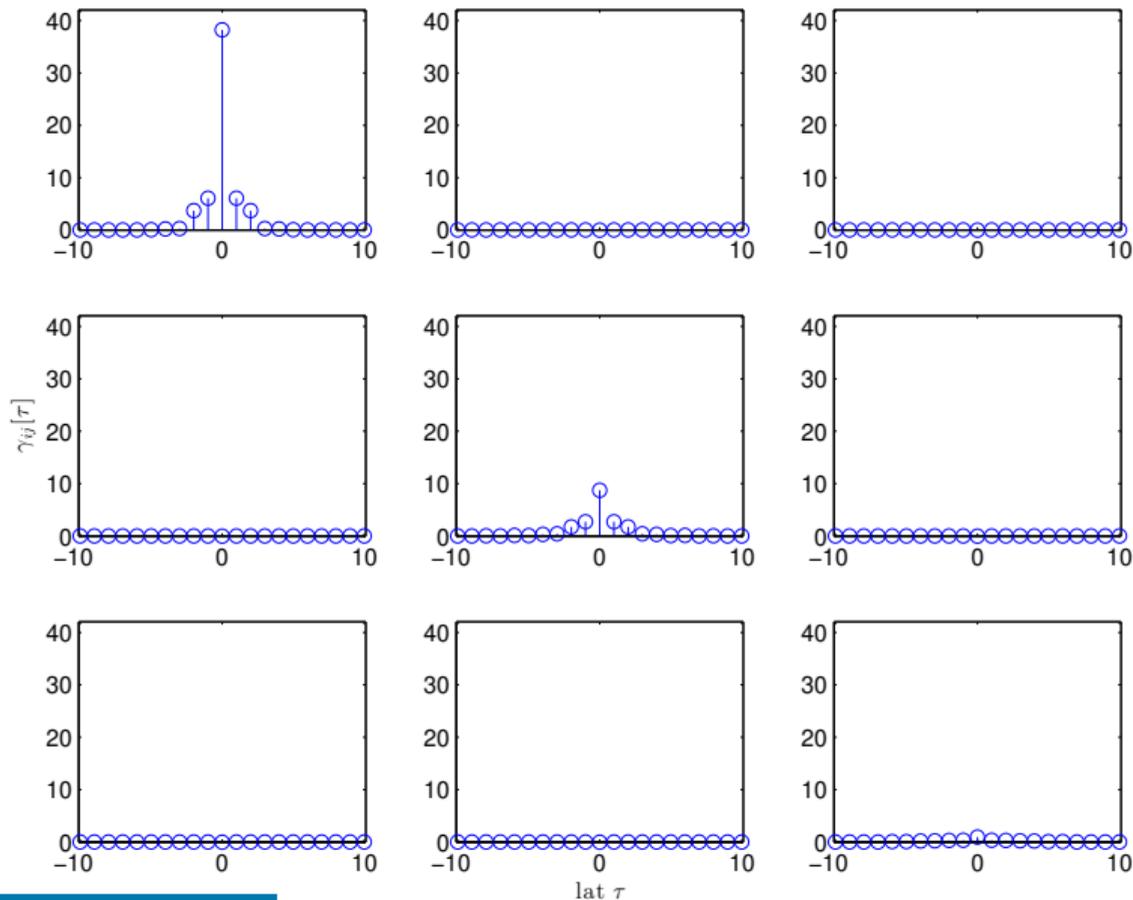


# SBR2 Example — Spectral Majorisation

- ▶ The on-diagonal elements are spectrally majorised

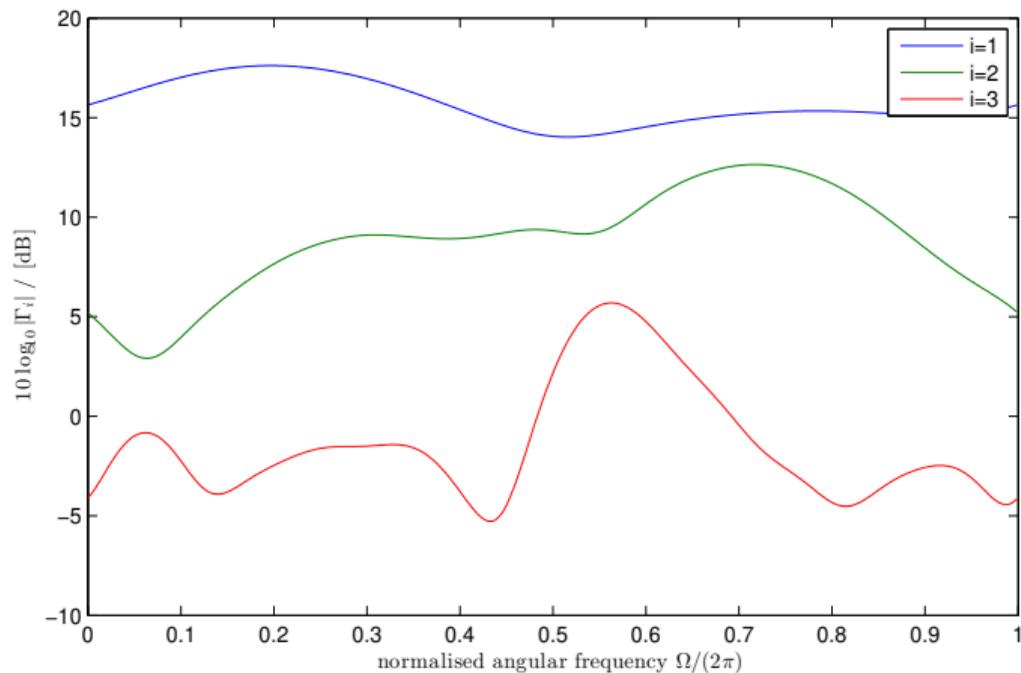

## SBR2 — Givens Rotation



- ▶ A Givens rotation eliminates the maximum off-diagonal element once brought onto the lag-zero matrix;
- ▶ note I: in the lag-zero matrix, one column and one row are modified by the shift:

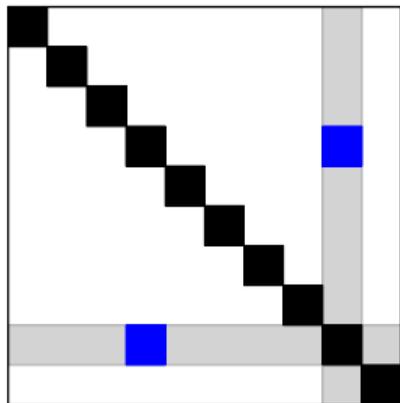

- ▶ note II: a Givens rotation only affects two columns and two rows in every matrix;
- ▶ Givens rotation is relatively low in computational cost!

## SBR2 — Givens Rotation


- ▶ A Givens rotation eliminates the maximum off-diagonal element once brought onto the lag-zero matrix;
- ▶ note I: in the lag-zero matrix, one column and one row are modified by the shift:

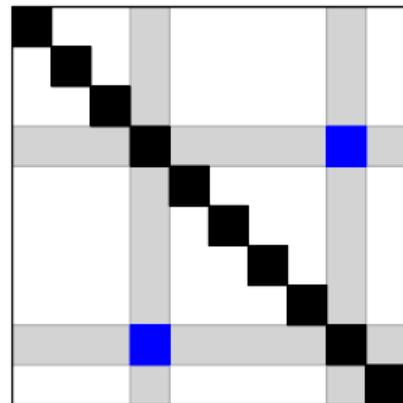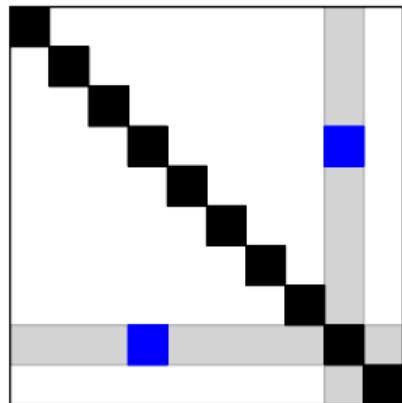

- ▶ note II: a Givens rotation only affects two columns and two rows in every matrix;
- ▶ Givens rotation is relatively low in computational cost!

## Sequential Matrix Diagonalisation (SMD, [108])


- ▶ Main idea — the zero-lag matrix is diagonalised in every step;
- ▶ initialisation: diagonalise  $\mathbf{R}[0]$  by EVD and apply modal matrix to all matrix coefficients  $\rightarrow \mathbf{S}^{(0)}$ ;
- ▶ at the  $i$ th step as in SBR2, the maximum element (or column with max. norm) is shifted to the lag-zero matrix:

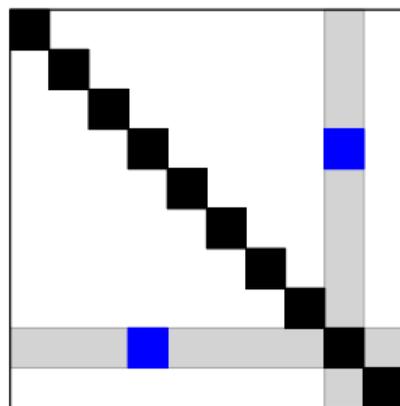

- ▶ an EVD is used to re-diagonalise the zero-lag matrix;
- ▶ a full modal matrix is applied at all lags — more costly than SBR2.

# Sequential Matrix Diagonalisation (SMD, [108])


- ▶ Main idea — the zero-lag matrix is diagonalised in every step;
- ▶ initialisation: diagonalise  $\mathbf{R}[0]$  by EVD and apply modal matrix to all matrix coefficients  $\rightarrow \mathbf{S}^{(0)}$ ;
- ▶ at the  $i$ th step as in SBR2, the maximum element (or column with max. norm) is shifted to the lag-zero matrix:

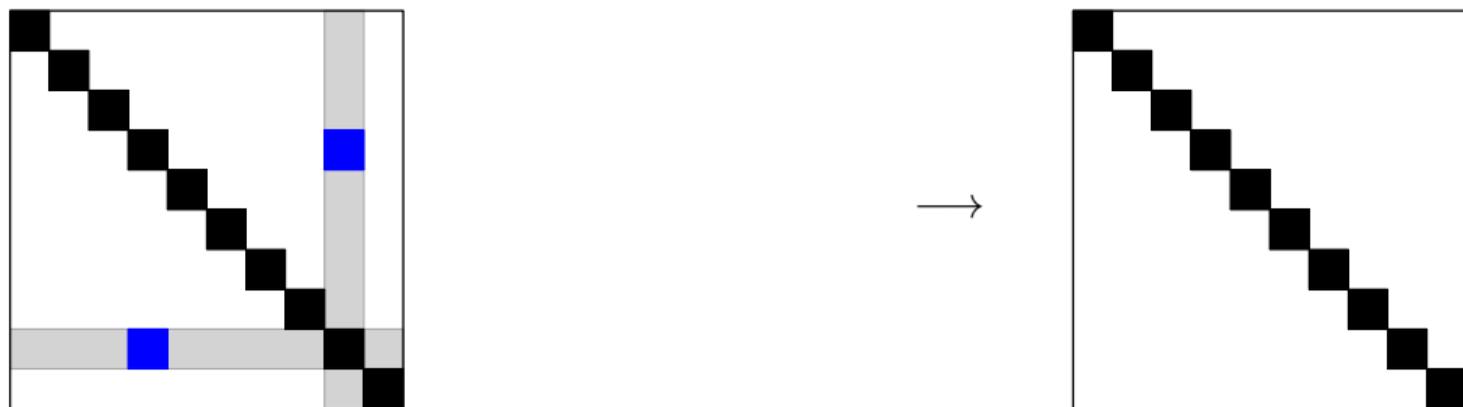

- ▶ an EVD is used to re-diagonalise the zero-lag matrix;
- ▶ a full modal matrix is applied at all lags — more costly than SBR2.

## Multiple Shift SMD (SMD)


- ▶ SMD **converges faster** than SBR2 — more energy is transferred per iteration step [25, 23, 26, 24];
- ▶ SMD is **more expensive** than SBR2 — full matrix multiplication at every lag;
- ▶ this cost will not increase further if more columns / rows are shifted into the lag-zero matrix at every iteration

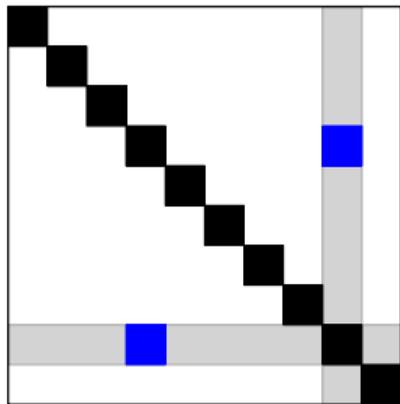

- ▶ MS-SMD will transfer yet more off-diagonal energy per iteration;
- ▶ because the total energy must remain constant under paraunitary operations, SBR2, SMD and MS-SMD can be proven to converge.

## Multiple Shift SMD (SMD)


- ▶ SMD **converges faster** than SBR2 — more energy is transferred per iteration step [25, 23, 26, 24];
- ▶ SMD is **more expensive** than SBR2 — full matrix multiplication at every lag;
- ▶ this cost will not increase further if more columns / rows are shifted into the lag-zero matrix at every iteration

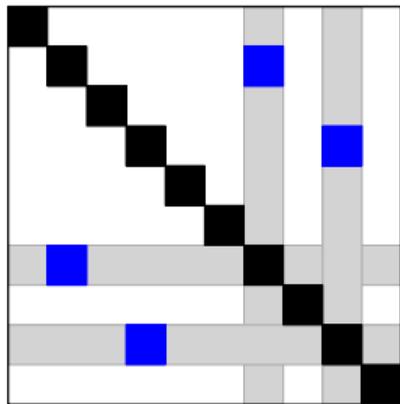

- ▶ MS-SMD will transfer yet more off-diagonal energy per iteration;
- ▶ because the total energy must remain constant under paraunitary operations, SBR2, SMD and MS-SMD can be proven to converge.



## Multiple Shift SMD (SMD)

- ▶ SMD **converges faster** than SBR2 — more energy is transferred per iteration step [25, 23, 26, 24];
- ▶ SMD is **more expensive** than SBR2 — full matrix multiplication at every lag;
- ▶ this cost will not increase further if more columns / rows are shifted into the lag-zero matrix at every iteration

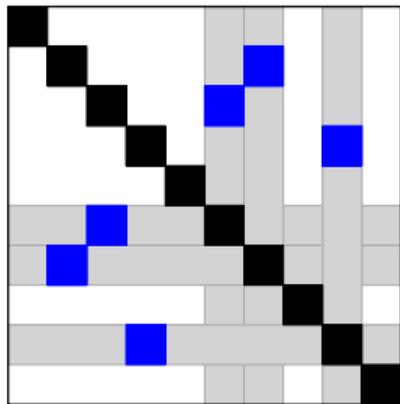

## Multiple Shift SMD (SMD)


- ▶ SMD **converges faster** than SBR2 — more energy is transferred per iteration step [25, 23, 26, 24];
- ▶ SMD is **more expensive** than SBR2 — full matrix multiplication at every lag;
- ▶ this cost will not increase further if more columns / rows are shifted into the lag-zero matrix at every iteration

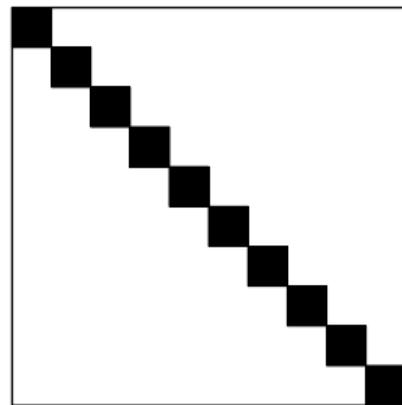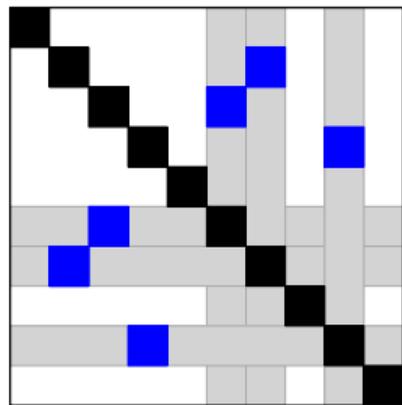

- ▶ MS-SMD will transfer yet more off-diagonal energy per iteration;
- ▶ because the total energy must remain constant under paraunitary operations, SBR2, SMD and MS-SMD can be proven to converge.


# SBR2/SMD/MS-SMD Convergence

- ▶ Measuring the remaining normalised off-diagonal energy over an ensemble of space-time covariance matrices:

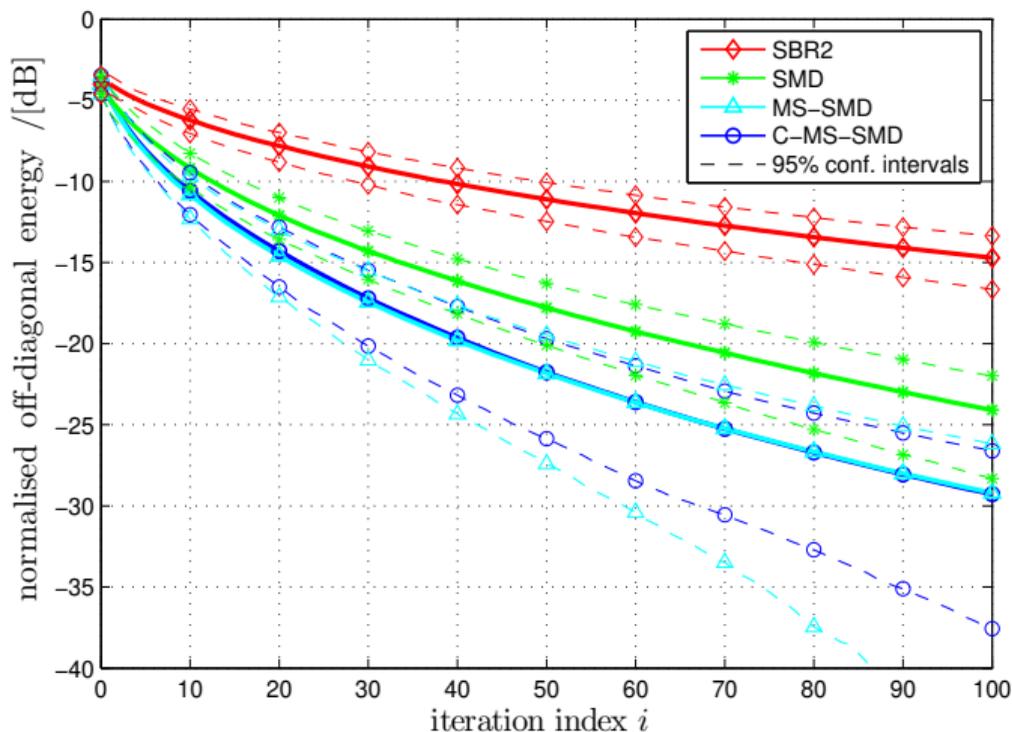


# SBR2/SMD/MS-SMD Application Cost 1

- ▶ Ensemble average of remaining off-diagonal energy vs. order of paraunitary filter banks to decompose  $4 \times 4 \times 16$  matrices:

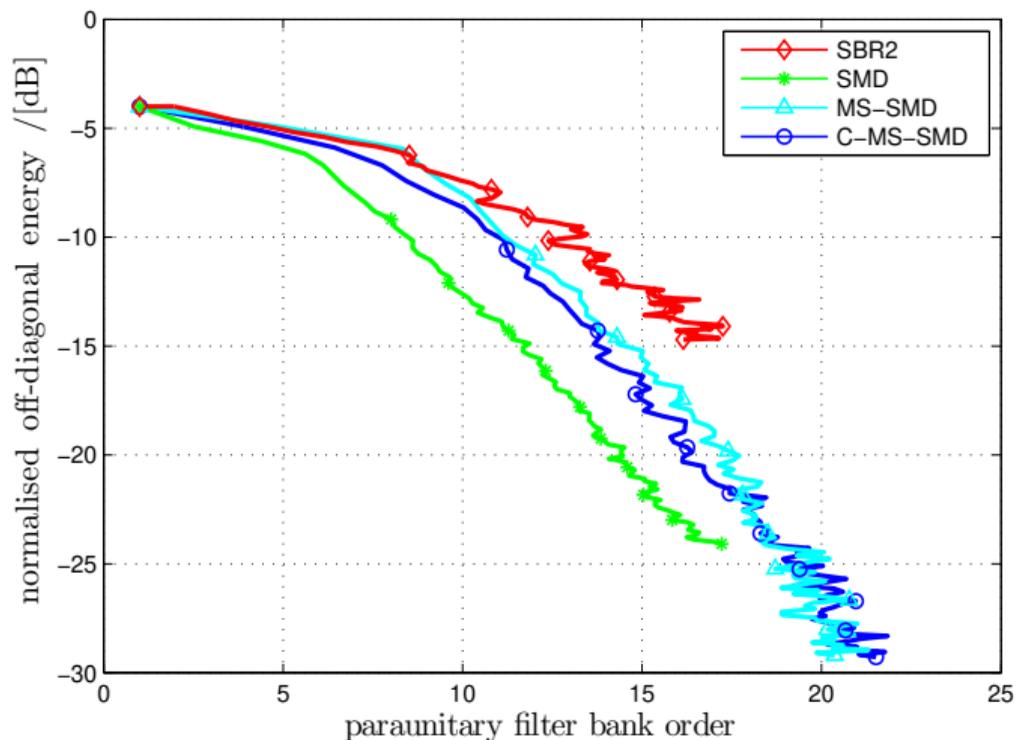

## SBR2/SMD/MS-SMD Application Cost 2

- ▶ Ensemble average of remaining off-diagonal energy vs. order of paraunitary filter banks to decompose  $8 \times 8 \times 64$  matrices:

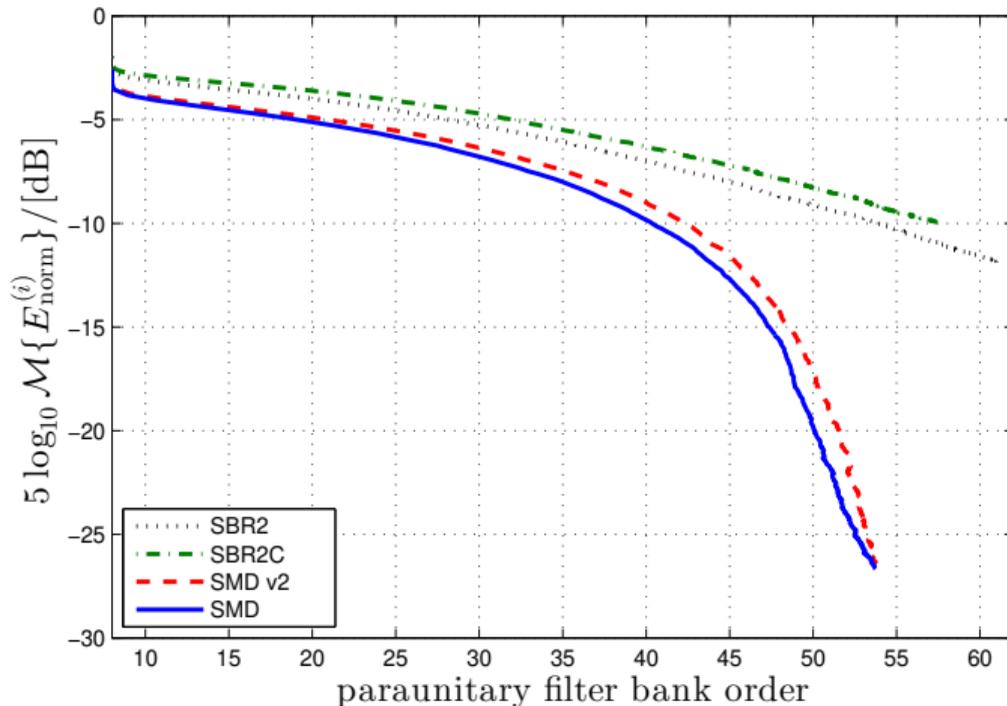


## Further Reading

- ▶ Second order sequential best rotation (SBR2) algorithm [85, 86];
- ▶ the SBR2 family of algorithms includes various modifications, such as to the cost function to maximise the coding gain [107, 109]; multiple shift SBR2 [126, 125]; efficient implementation [60, 67]; sequential matrix diagonalisation (SMD) algorithm [108], and various SMD family versions to undertake multiple shifts [25, 23, 24], apply search space reduction [26, 25, 31, 32], numerical efficiencies [22, 27, 28, 35, 39, 29, 34, 36, 119]; a Householder approach to SMD [103];
- ▶ DFT domain algorithms to extract analytic solution — separate extraction of eigenvalues [140, 139] and eigenvectors [136, 138] based on smoothness criteria [133, 141, 145]; a similar attempt had been undertaken in [121] with analysis in [33, 37, 38]; a principal eigenpair can be extracted via the power method [66];
- ▶ support estimation [64] and trimming of polynomial matrices [51, 120, 27, 28];
- ▶ not shown here, but similar algorithms have been applied to other linear algebraic operations such as the QR decomposition [30, 49, 50], singular value decomposition [84, 138, 63, 62, 144] and the generalised EVD [21].

# MATLAB Polynomial EVD Toolbox

- ▶ The MATLAB polynomial EVD toolbox can be downloaded from [pevd-toolbox.eee.strath.ac.uk](http://pevd-toolbox.eee.strath.ac.uk)

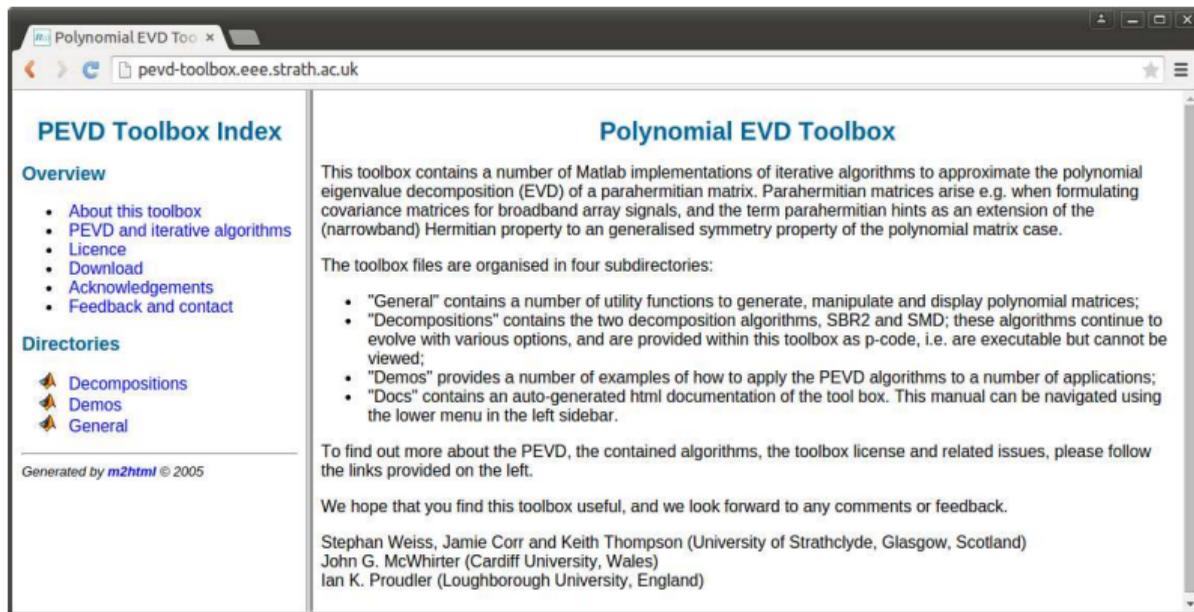

The screenshot shows a web browser window with the URL [pevd-toolbox.eee.strath.ac.uk](http://pevd-toolbox.eee.strath.ac.uk). The page is titled "Polynomial EVD Toolbox" and features a left sidebar with a "PEVD Toolbox Index" and an "Overview" section. The main content area provides a detailed description of the toolbox, its organization into subdirectories, and contact information for the authors.

**PEVD Toolbox Index**

**Overview**

- [About this toolbox](#)
- [PEVD and iterative algorithms](#)
- [Licence](#)
- [Download](#)
- [Acknowledgements](#)
- [Feedback and contact](#)

**Directories**

- [Decompositions](#)
- [Demos](#)
- [General](#)

Generated by *m2html* © 2005

## Polynomial EVD Toolbox

This toolbox contains a number of Matlab implementations of iterative algorithms to approximate the polynomial eigenvalue decomposition (EVD) of a parahermitian matrix. Parahermitian matrices arise e.g. when formulating covariance matrices for broadband array signals, and the term parahermitian hints as an extension of the (narrowband) Hermitian property to a generalised symmetry property of the polynomial matrix case.

The toolbox files are organised in four subdirectories:

- "General" contains a number of utility functions to generate, manipulate and display polynomial matrices;
- "Decompositions" contains the two decomposition algorithms, SBR2 and SMD; these algorithms continue to evolve with various options, and are provided within this toolbox as p-code, i.e. are executable but cannot be viewed;
- "Demos" provides a number of examples of how to apply the PEVD algorithms to a number of applications;
- "Docs" contains an auto-generated html documentation of the tool box. This manual can be navigated using the lower menu in the left sidebar.

To find out more about the PEVD, the contained algorithms, the toolbox license and related issues, please follow the links provided on the left.


We hope that you find this toolbox useful, and we look forward to any comments or feedback.

Stephan Weiss, Jamie Corr and Keith Thompson (University of Strathclyde, Glasgow, Scotland)  
John G. McWhirter (Cardiff University, Wales)  
Ian K. Proudler (Loughborough University, England)

- ▶ the toolbox contains a number of iterative algorithms to calculate an approximate PEVD, related functions, and demos.

# Narrowband MIMO Communications


- ▶ a narrowband channel is characterised by a matrix  $\mathbf{C}$  containing complex gain factors;
- ▶ problem: how to select the precoder and equaliser?

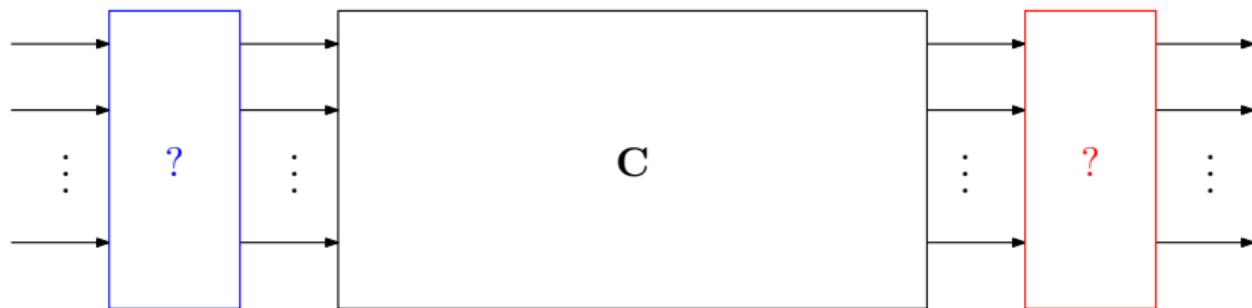

- ▶ overall system;

# Narrowband MIMO Communications


- ▶ a narrowband channel is characterised by a matrix  $\mathbf{C}$  containing complex gain factors;
- ▶ problem: how to select the **precoder** and **equaliser**?

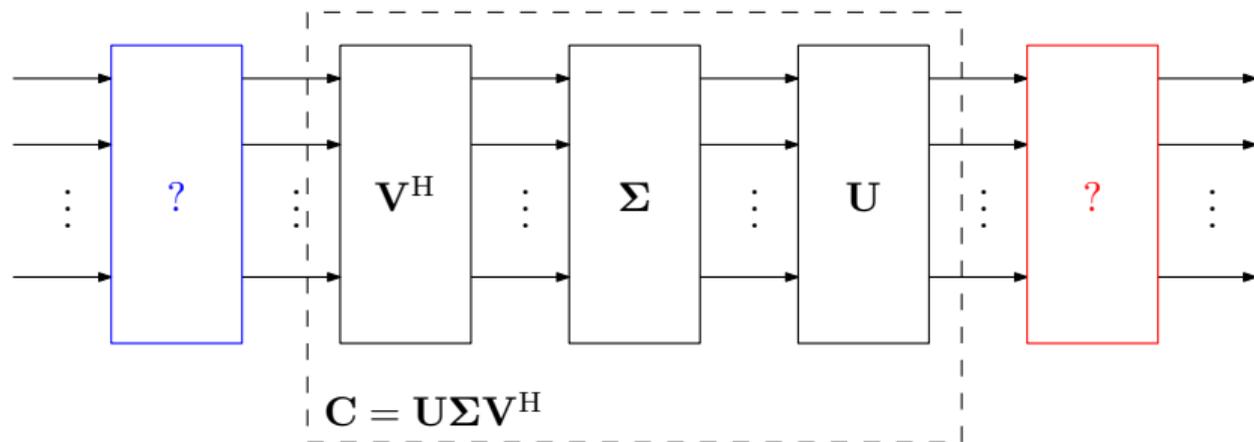

- ▶ the singular value decomposition (SVD) factorises  $\mathbf{C}$  into two unitary matrices  $\mathbf{U}$  and  $\mathbf{V}^H$  and a diagonal matrix  $\Sigma$ ;

## Narrowband MIMO Communications


- ▶ a narrowband channel is characterised by a matrix  $\mathbf{C}$  containing complex gain factors;
- ▶ problem: how to select the **precoder** and **equaliser**?

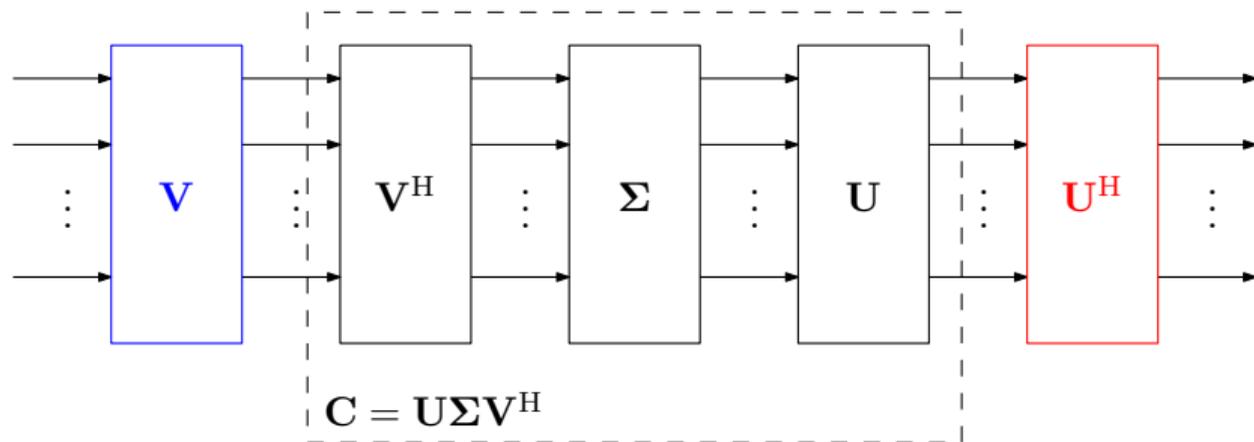

- ▶ we select the precoder and the equaliser from the unitary matrices provided by the channel's SVD;
- ▶ the overall system is diagonalised, decoupling the channel into independent single-input single-output systems by means of unitary matrices.

# Broadband MIMO Channel


- ▶ The channel is a matrix of FIR filters; example for a  $3 \times 4$  system  $\mathbf{C}[n]$ :

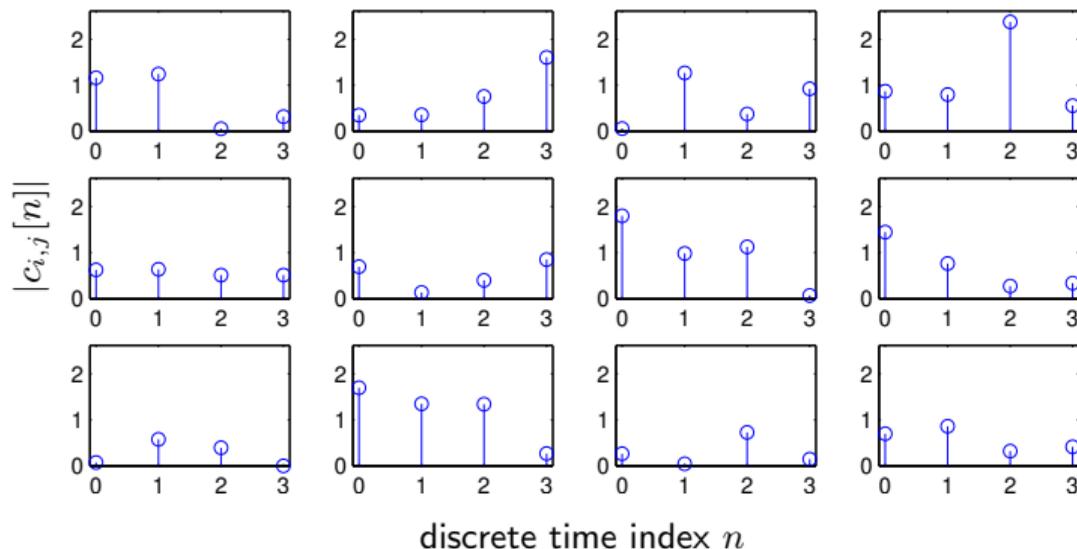

- ▶ the transfer function  $\mathbf{C}(z) \bullet \text{---} \circ \mathbf{C}[n]$  is a polynomial matrix;
- ▶ an SVD can only diagonalise  $\mathbf{C}[n]$  for one particular lag  $n$ .


# Standard Broadband MIMO Approaches

- ▶ OFDM (if approximate channel length is known [55]):
  1. divide spectrum into narrowband channels;
  2. address each narrowband channel independently using narrowband-optimal techniques;drawback: ignores spectral coherence across frequency bins;
- ▶ optimum filter bank transceiver (if channel itself is known [112, 113, 111]):
  1. block processing;
  2. inter-block interference is eliminated by guard intervals;
  3. resulting matrix can be diagonalised by SVD;
- ▶ both techniques invest DOFs into the guard intervals, which are generally not balanced against other error sources.

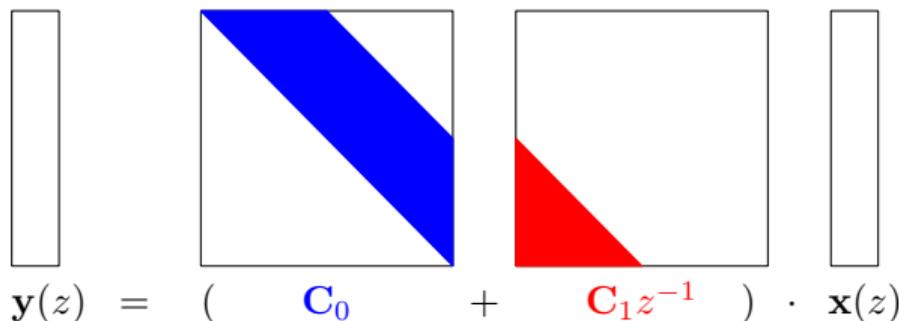
$$\mathbf{y}(z) = \left( \mathbf{C}_0 + \mathbf{C}_1 z^{-1} \right) \cdot \mathbf{x}(z)$$


# Standard Broadband MIMO Approaches

- ▶ OFDM (if approximate channel length is known [55]):
  1. divide spectrum into narrowband channels;
  2. address each narrowband channel independently using narrowband-optimal techniques;drawback: ignores spectral coherence across frequency bins;
- ▶ optimum filter bank transceiver (if channel itself is known [112, 113, 111]):
  1. block processing;
  2. inter-block interference is eliminated by guard intervals;
  3. resulting matrix can be diagonalised by SVD;
- ▶ both techniques invest DOFs into the guard intervals, which are generally not balanced against other error sources.

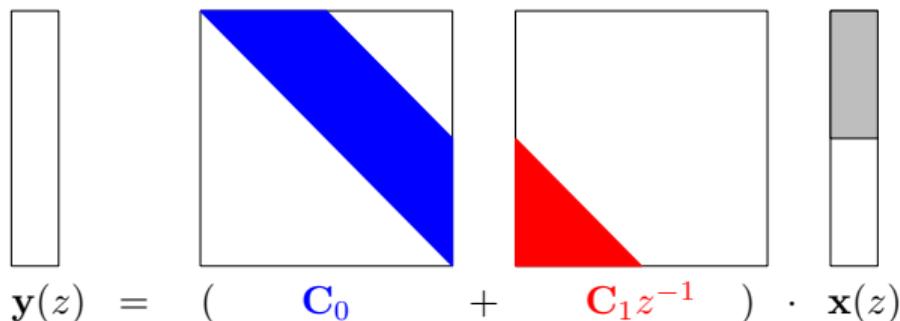
$$\mathbf{y}(z) = \left( \mathbf{C}_0 + \mathbf{C}_1 z^{-1} \right) \cdot \mathbf{x}(z)$$


# Standard Broadband MIMO Approaches

- ▶ OFDM (if approximate channel length is known [55]):
  1. divide spectrum into narrowband channels;
  2. address each narrowband channel independently using narrowband-optimal techniques;drawback: ignores spectral coherence across frequency bins;
- ▶ optimum filter bank transceiver (if channel itself is known [112, 113, 111]):
  1. block processing;
  2. inter-block interference is eliminated by guard intervals;
  3. resulting matrix can be diagonalised by SVD;
- ▶ both techniques invest DOFs into the guard intervals, which are generally not balanced against other error sources.

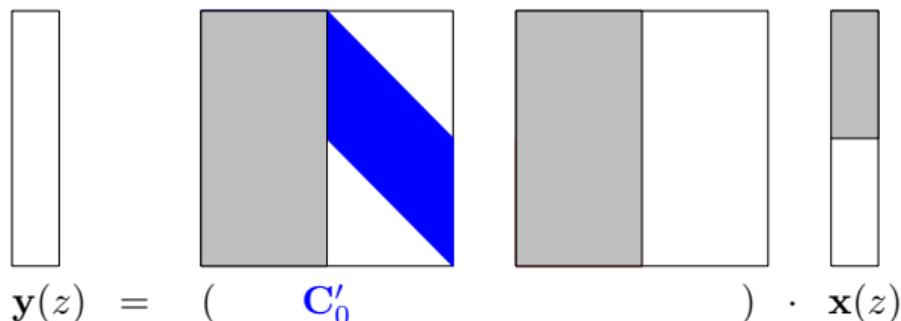
$$\mathbf{y}(z) = \left( \mathbf{C}'_0 \right) \cdot \mathbf{x}(z)$$

## Standard Broadband MIMO Approaches

- ▶ OFDM (if approximate channel length is known [55]):
  1. divide spectrum into narrowband channels;
  2. address each narrowband channel independently using narrowband-optimal techniques;
 drawback: ignores spectral coherence across frequency bins;
- ▶ optimum filter bank transceiver (if channel itself is known [112, 113, 111]):
  1. block processing;
  2. inter-block interference is eliminated by guard intervals;
  3. resulting matrix can be diagonalised by SVD;
- ▶ both techniques invest DOFs into the guard intervals, which are generally not balanced against other error sources.

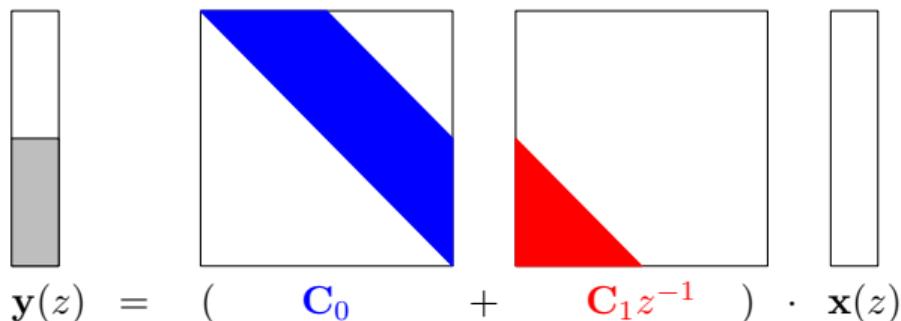

$$\mathbf{y}(z) = \left( \mathbf{C}_0 \right) + \left( \mathbf{C}_1 z^{-1} \right) \cdot \mathbf{x}(z)$$



# Polynomial Singular Value Decompositions

- ▶ Iterative algorithms have been developed to determine a polynomial eigenvalue decomposition (EVD) for a parahermitian matrix  $\mathbf{R}(z) = \mathbf{R}^P(z) = \mathbf{R}^H(z^{-1})$ :

$$\mathbf{R}(z) \approx \mathbf{H}(z)\mathbf{\Gamma}(z)\mathbf{H}^P(z)$$

- ▶ paraunitary  $\mathbf{H}(z)\mathbf{H}^P(z) = \mathbf{I}$ , diagonal and spectrally majorised  $\mathbf{\Gamma}(z)$ ;
- ▶ polynomial SVD of channel  $\mathbf{C}(z)$  can be obtained via two EVDs:


$$\mathbf{C}(z)\mathbf{C}^P(z) = \mathbf{U}(z)\mathbf{\Sigma}^+(z)\mathbf{\Sigma}^-(z)\mathbf{U}^P(z)$$

$$\mathbf{C}^P(z)\mathbf{C}(z) = \mathbf{V}(z)\mathbf{\Sigma}^-(z)\mathbf{\Sigma}^+(z)\mathbf{V}^P(z)$$

finally:

$$\mathbf{C}(z) = \mathbf{U}(z)\mathbf{\Sigma}^+(z)\mathbf{V}^P(z) .$$

# MIMO Application Example

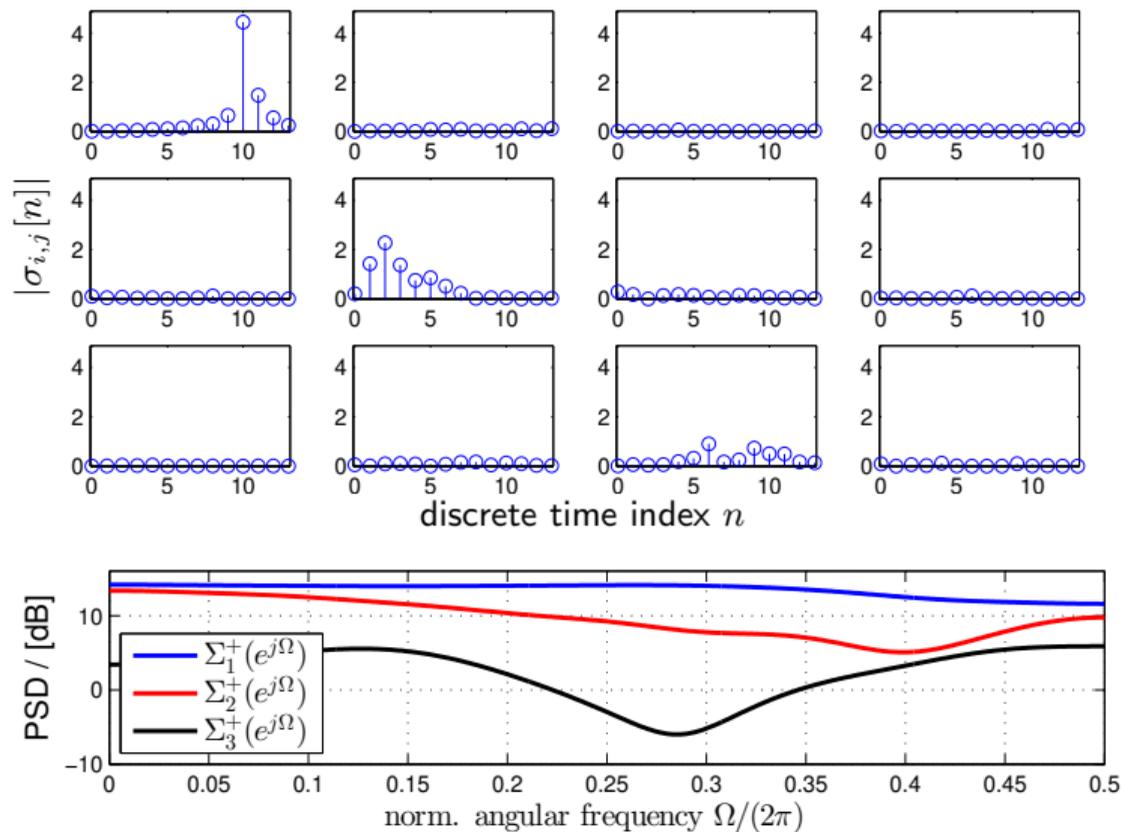


- Polynomial SVD of the previous  $\mathbf{C}(z) : \mathbb{C} \rightarrow \mathbb{C}^{3 \times 4}$ ;
- the singular value spectra are majorised.

## Further Reading

- ▶ General precoding and equalisation [2, 72, 73, 97, 116, 117, 119, 118];
- ▶ joint source-channel coding [128, 127, 142];
- ▶ subband coding [107, 109];
- ▶ polynomial Wiener filter as optimum receiver [71, 74, 148];
- ▶ non-linear precoding for broadband MIMO systems [1, 3, 4, 5, 6, 7, 8, 88, 89, 90, 91, 92, 93, 94, 95];
- ▶ combination with filter bank multicarrier methods [16, 87, 98, 99, 100, 106, 149];
- ▶ related transceiver design using a polynomial generalised SVD [56].

# Narrowband Source Model

- ▶ Scenario with sensor array and far-field sources:




- ▶ for the narrowband case, the source signals arrive with delays, expressed by phase shifts in a steering vector
- ▶ data model:

$$\mathbf{x}[n] =$$

# Narrowband Source Model

- ▶ Scenario with sensor array and far-field sources:


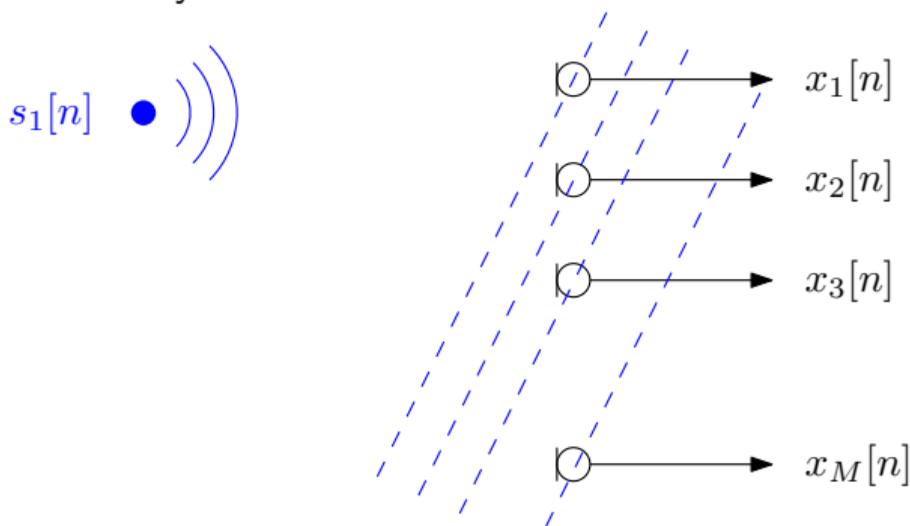


- ▶ for the narrowband case, the source signals arrive with delays, expressed by phase shifts in a steering vector  $\mathbf{s}_1$
- ▶ data model:

$$\mathbf{x}[n] = s_1[n] \cdot \mathbf{s}_1$$

# Narrowband Source Model

- ▶ Scenario with sensor array and far-field sources:




- ▶ for the narrowband case, the source signals arrive with delays, expressed by phase shifts in a steering vector  $\mathbf{s}_1$
- ▶ data model:

$$\mathbf{x}[n] = \mathbf{s}_1[n] \cdot \mathbf{s}_1$$

# Narrowband Source Model

- ▶ Scenario with sensor array and far-field sources:

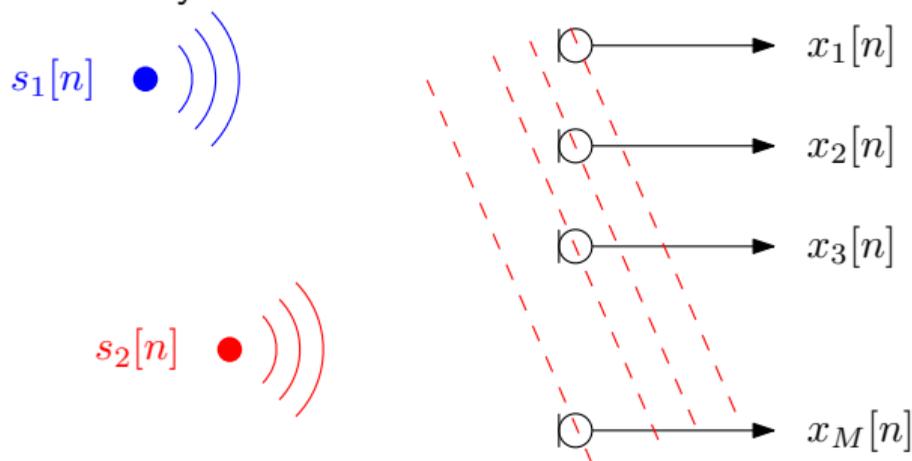


- ▶ for the narrowband case, the source signals arrive with delays, expressed by phase shifts in a steering vector  $\mathbf{s}_1$ ,  $\mathbf{s}_2$
- ▶ data model:

$$\mathbf{x}[n] = s_1[n] \cdot \mathbf{s}_1 + s_2[n] \cdot \mathbf{s}_2$$

# Narrowband Source Model

- ▶ Scenario with sensor array and far-field sources:

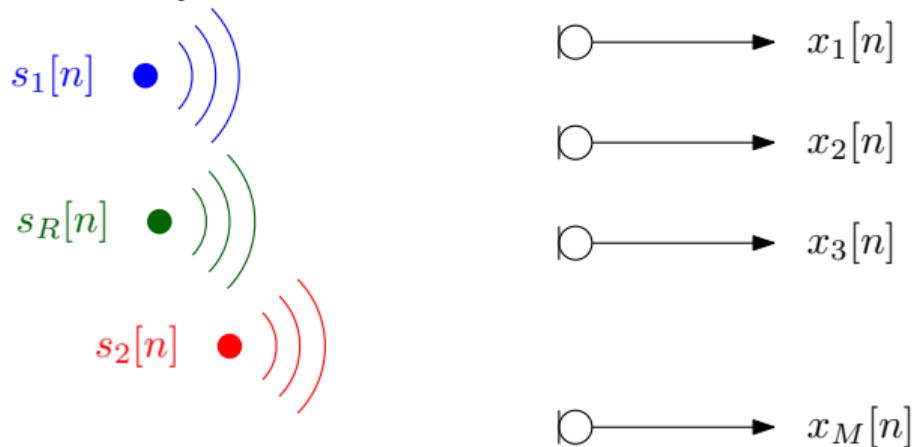


- ▶ for the narrowband case, the source signals arrive with delays, expressed by phase shifts in a steering vector  $\mathbf{s}_1$ ,  $\mathbf{s}_2$
- ▶ data model:

$$\mathbf{x}[n] = s_1[n] \cdot \mathbf{s}_1 + s_2[n] \cdot \mathbf{s}_2$$

## Narrowband Source Model

- Scenario with sensor array and far-field sources:

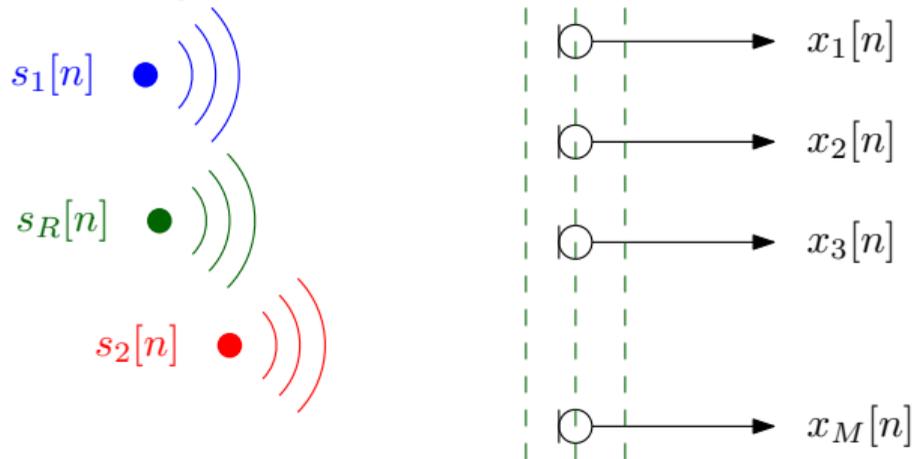

- for the narrowband case, the source signals arrive with delays, expressed by phase shifts in a steering vector  $\mathbf{s}_1, \mathbf{s}_2, \dots, \mathbf{s}_R$ ;
- data model:

$$\mathbf{x}[n] = s_1[n] \cdot \mathbf{s}_1 + s_2[n] \cdot \mathbf{s}_2 + \dots + s_R[n] \cdot \mathbf{s}_R = \sum_{r=1}^R s_r[n] \cdot \mathbf{s}_r$$

## Steering Vector

- ▶ A signal  $s[n]$  arriving at the array can be characterised by the delays of its wavefront (neglecting attenuation):

$$\begin{bmatrix} x_0[n] \\ x_1[n] \\ \vdots \\ x_{M-1}[n] \end{bmatrix} = \begin{bmatrix} s[n - \tau_0] \\ s[n - \tau_1] \\ \vdots \\ s[n - \tau_{M-1}] \end{bmatrix} = \begin{bmatrix} \delta[n - \tau_0] \\ \delta[n - \tau_1] \\ \vdots \\ \delta[n - \tau_{M-1}] \end{bmatrix} * s[n] \quad \text{---} \bullet \quad \mathbf{a}_\vartheta(z)S(z)$$

- ▶ if evaluated at a narrowband normalised angular frequency  $\Omega_i$ , the time delays  $\tau_m$  in the **broadband steering vector**  $\mathbf{a}_\vartheta(z)$  collapse to phase shifts in the **narrowband steering vector**  $\mathbf{a}_{\vartheta, \Omega_i}$ ,

$$\mathbf{a}_{\vartheta, \Omega_i} = \mathbf{a}_\vartheta(z) \Big|_{z=e^{j\Omega_i}} = \begin{bmatrix} e^{-j\tau_0\Omega_i} \\ e^{-j\tau_1\Omega_i} \\ \vdots \\ e^{-j\tau_{M-1}\Omega_i} \end{bmatrix} \cdot$$

- ▶ A data matrix  $\mathbf{X} \in \mathbb{C}^{M \times L}$  can be formed from  $L$  measurements:

$$\mathbf{X} = [ \mathbf{x}[n] \quad \mathbf{x}[n+1] \quad \dots \quad \mathbf{x}[n+L-1] ]$$

- ▶ assuming that all  $x_m[n]$ ,  $m = 1, 2, \dots, M$  are zero mean, the (instantaneous) data covariance matrix is

$$\mathbf{R} = \mathcal{E} \{ \mathbf{x}[n] \mathbf{x}^H[n] \} \approx \frac{1}{L} \mathbf{X} \mathbf{X}^H$$

where the approximation assumes ergodicity and a sufficiently large  $L$ ;

- ▶ Problem: can we tell from  $\mathbf{X}$  or  $\mathbf{R}$  (i) the number of sources and (ii) their origin / time series?
- ▶ w.r.t. Jonathon Chamber's introduction, we here only consider the underdetermined case of more sensors than sources,  $M \geq K$ , and generally  $L \gg M$ .

# SVD of Data Matrix

- ▶ Singular value decomposition of  $\mathbf{X}$ :

$$\boxed{\mathbf{X}} = \boxed{\mathbf{U}} \boxed{\mathbf{\Sigma}} \boxed{\mathbf{V}^H}$$

- ▶ unitary matrices  $\mathbf{U} = [\mathbf{u}_1 \dots \mathbf{u}_M]$  and  $\mathbf{V} = [\mathbf{v}_1 \dots \mathbf{v}_L]$ ;
- ▶ diagonal  $\mathbf{\Sigma}$  contains the real, positive semidefinite singular values of  $\mathbf{X}$  in descending order:

$$\mathbf{\Sigma} = \begin{bmatrix} \sigma_1 & 0 & \dots & 0 & 0 & \dots & 0 \\ 0 & \sigma_2 & \ddots & \vdots & \vdots & & \vdots \\ \vdots & \ddots & \ddots & 0 & \vdots & & \vdots \\ 0 & & 0 & \sigma_M & 0 & \dots & 0 \end{bmatrix}$$


with  $\sigma_1 \geq \sigma_2 \geq \dots \geq \sigma_M \geq 0$ .

# Singular Values

- ▶ If the array is illuminated by  $R \leq M$  linearly independent sources, the rank of the data matrix is

$$\text{rank}\{\mathbf{X}\} = R$$

- ▶ only the first  $R$  singular values of  $\mathbf{X}$  will be non-zero;
- ▶ in practice, noise often will ensure that  $\text{rank}\{\mathbf{X}\} = M$ , with  $M - R$  trailing singular values that define the noise floor:

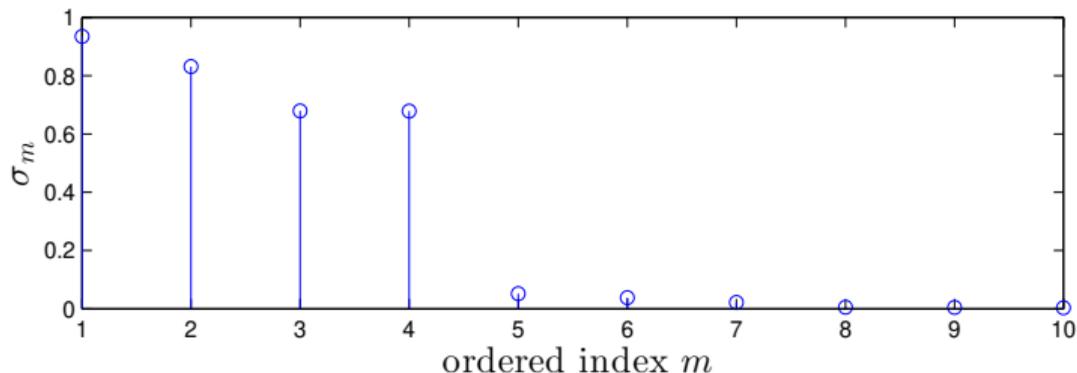

- ▶ therefore, by thresholding singular values, it is possible to estimate the number of linearly independent sources  $R$ .

# Subspace Decomposition

- ▶ If  $\text{rank}\{\mathbf{X}\} = R$ , the SVD can be split:

$$\mathbf{X} = [\mathbf{U}_s \quad \mathbf{U}_n] \begin{bmatrix} \Sigma_s & \mathbf{0} \\ \mathbf{0} & \Sigma_n \end{bmatrix} \begin{bmatrix} \mathbf{V}_s^H \\ \mathbf{V}_n^H \end{bmatrix}$$

- ▶ with  $\mathbf{U}_s \in \mathbb{C}^{M \times R}$  and  $\mathbf{V}_s^H \in \mathbb{C}^{R \times L}$  corresponding to the  $R$  largest singular values;
- ▶  $\mathbf{U}_s$  and  $\mathbf{V}_s^H$  define the **signal-plus-noise subspace** of  $\mathbf{X}$ :

$$\mathbf{X} = \sum_{m=1}^M \sigma_m \mathbf{u}_m \mathbf{v}_m^H \approx \sum_{m=1}^R \sigma_m \mathbf{u}_m \mathbf{v}_m^H$$

- ▶ the complements  $\mathbf{U}_n$  and  $\mathbf{V}_n^H$ ,

$$\mathbf{U}_s^H \mathbf{U}_n = \mathbf{0} \quad , \quad \mathbf{V}_s \mathbf{V}_n^H = \mathbf{0}$$

define the **noise-only subspace** of  $\mathbf{X}$ .

- ▶ Any Hermitian matrix  $\mathbf{A} = \mathbf{A}^H$  allows an eigenvalue decomposition

$$\mathbf{A} = \mathbf{Q}\mathbf{\Lambda}\mathbf{Q}^H$$

with  $\mathbf{Q}$  unitary and the eigenvalues in  $\mathbf{\Lambda}$  real valued and positive semi-definite;

- ▶ postulating  $\mathbf{X} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^H$ , therefore:

$$\mathbf{X}\mathbf{X}^H = (\mathbf{U}\mathbf{\Sigma}\mathbf{V}^H)(\mathbf{V}\mathbf{\Sigma}^H\mathbf{U}^H) = \mathbf{U}\mathbf{\Lambda}\mathbf{U}^H \quad (44)$$

$$\mathbf{X}^H\mathbf{X} = (\mathbf{V}\mathbf{\Sigma}^H\mathbf{U}^H)(\mathbf{U}\mathbf{\Sigma}\mathbf{V}^H) = \mathbf{V}\mathbf{\Lambda}\mathbf{V}^H \quad (45)$$

- ▶ (ordered) eigenvalues relate to the singular values:  $\lambda_m = \sigma_m^2$ ;
- ▶ the covariance matrix  $\mathbf{R} = \frac{1}{L}\mathbf{X}\mathbf{X}$  has the same rank as the data matrix  $\mathbf{X}$ , and with  $\mathbf{U}$  provides access to the same spatial subspace decomposition.


## Narrowband MUSIC Algorithm

- ▶ EVD of the narrowband covariance matrix identifies signal-plus-noise and noise-only subspaces

$$\mathbf{R} = [\mathbf{U}_s \quad \mathbf{U}_n] \begin{bmatrix} \mathbf{\Lambda}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{\Lambda}_n \end{bmatrix} \begin{bmatrix} \mathbf{U}_s^H \\ \mathbf{U}_n^H \end{bmatrix}$$

- ▶ scanning the signal-plus-noise subspace could only help to retrieve sources with orthogonal steering vectors;
- ▶ therefore, the multiple signal classification (MUSIC) algorithm scans the noise-only subspace for minima, or maxima of its reciprocal

$$S_{\text{MUSIC}}(\vartheta) = \frac{1}{\|\mathbf{U}_n \mathbf{a}_{\vartheta, \Omega_i}\|_2^2}$$

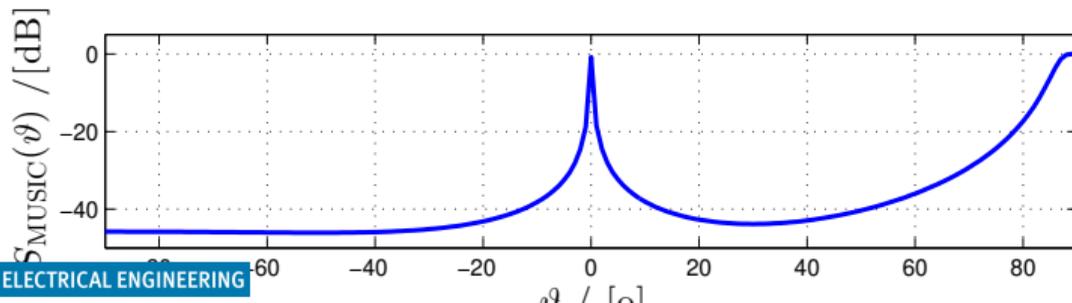


# Narrowband Source Separation



- ▶ Via SVD of the data matrix  $\mathbf{X}$  or EVD of the covariance matrix  $\mathbf{R}$ , we can determine the number of linearly independent sources  $R$ ;
- ▶ using the subspace decompositions offered by EVD/SVD, the directions of arrival can be estimated using e.g. MUSIC;
- ▶ based on knowledge of the angle of arrival, beamforming could be applied to  $\mathbf{X}$  to extract specific sources;
- ▶ overall: EVD (and SVD) can play a vital part in **narrowband source separation**;
- ▶ what about **broadband source separation**?

# Broadband Array Scenario

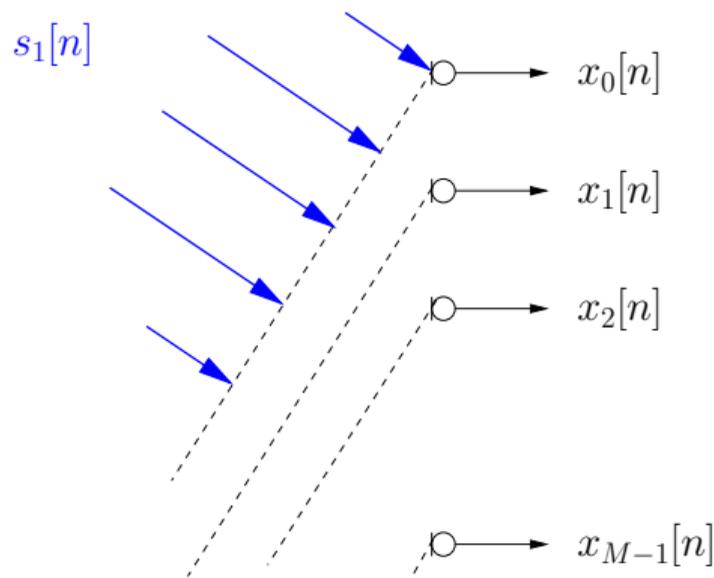

- ▶ Compared to the narrowband case, time delays rather than phase shifts bear information on the direction of a source.

## Broadband Steering Vector

- ▶ A signal  $s[n]$  arriving at the array can be characterised by the delays of its wavefront (neglecting attenuation):

$$\begin{bmatrix} x_0[n] \\ x_1[n] \\ \vdots \\ x_{M-1}[n] \end{bmatrix} = \begin{bmatrix} s[n - \tau_0] \\ s[n - \tau_1] \\ \vdots \\ s[n - \tau_{M-1}] \end{bmatrix} = \begin{bmatrix} \delta[n - \tau_0] \\ \delta[n - \tau_1] \\ \vdots \\ \delta[n - \tau_{M-1}] \end{bmatrix} * s[n] \quad \text{---} \bullet \quad \mathbf{a}_\vartheta(z)S(z)$$

- ▶ if evaluated at a narrowband normalised angular frequency  $\Omega_i$ , the time delays  $\tau_m$  in the **broadband steering vector**  $\mathbf{a}_\vartheta(z)$  collapse to phase shifts in the **narrowband steering vector**  $\mathbf{a}_{\vartheta, \Omega_i}$ ,


$$\mathbf{a}_{\vartheta, \Omega_i} = \mathbf{a}_\vartheta(z) \Big|_{z=e^{j\Omega_i}} = \begin{bmatrix} e^{-j\tau_0\Omega_i} \\ e^{-j\tau_1\Omega_i} \\ \vdots \\ e^{-j\tau_{M-1}\Omega_i} \end{bmatrix} \cdot$$

# Space-Time Covariance Matrix

- ▶ If delays must be considered, the (space-time) covariance matrix must capture the lag  $\tau$ :

$$\mathbf{R}[\tau] = \mathcal{E}\{\mathbf{x}[n] \cdot \mathbf{x}^H[n - \tau]\}$$

- ▶  $\mathbf{R}[\tau]$  contains auto- and cross-correlation sequences:

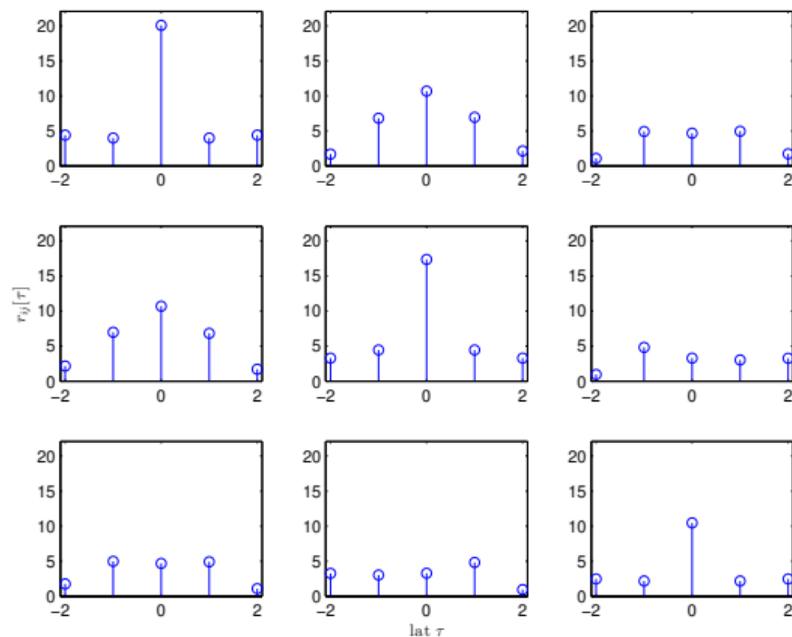

- ▶  $z$ -transform of the space-time covariance matrix is given by

$$\mathbf{R}[\tau] = \mathcal{E}\{\mathbf{x}_n \mathbf{x}_{n-\tau}^H\} \quad \circ \text{---} \bullet \quad \mathbf{R}(z) = \sum_l S_l(z) \mathbf{a}_{\vartheta_l}(z) \tilde{\mathbf{a}}_{\vartheta_l}(z) + \sigma_N^2 \mathbf{I}$$

with  $\vartheta_l$  the direction of arrival and  $S_l(z)$  the PSD of the  $l$ th source;

- ▶  $\mathbf{R}(z)$  is the cross spectral density (CSD) matrix;
- ▶ the instantaneous covariance matrix (no lag parameter  $\tau$ )



$$\mathbf{R} = \mathcal{E}\{\mathbf{x}_n \mathbf{x}_n^H\} = \mathbf{R}[0] .$$

# Polynomial MUSIC (PMUSIC, [11])

- ▶ Based on the polynomial EVD of the broadband covariance matrix

$$\mathbf{R}(z) \approx \underbrace{\begin{bmatrix} \mathbf{Q}_s(z) & \mathbf{Q}_n(z) \end{bmatrix}}_{\mathbf{Q}(z)} \underbrace{\begin{bmatrix} \mathbf{\Lambda}_s(z) & \mathbf{0} \\ \mathbf{0} & \mathbf{\Lambda}_n(z) \end{bmatrix}}_{\mathbf{\Lambda}(z)} \begin{bmatrix} \tilde{\mathbf{Q}}_s(z) \\ \tilde{\mathbf{Q}}_n(z) \end{bmatrix}$$

- ▶ paraunitary  $\mathbf{Q}(z)$ , s.t.  $\mathbf{Q}(z)\tilde{\mathbf{Q}}(z) = \mathbf{I}$ ;
- ▶ diagonalised and spectrally majorised  $\mathbf{\Lambda}(z)$ :

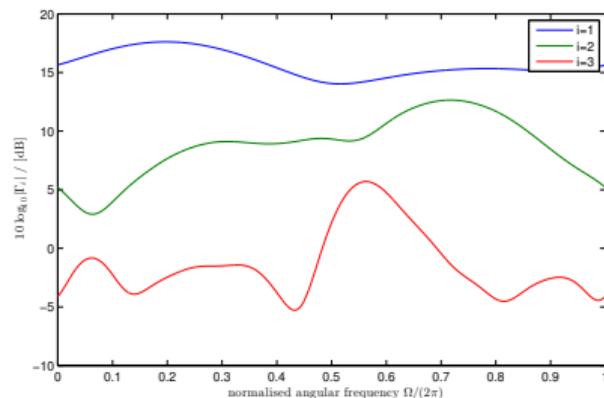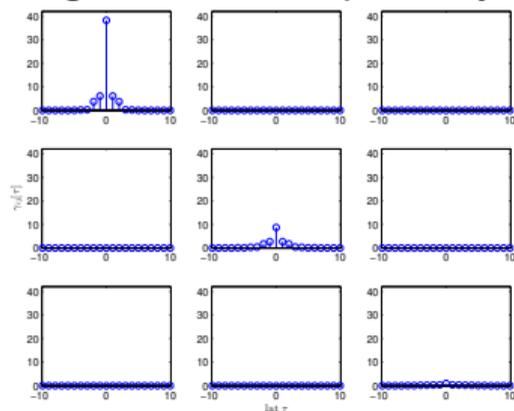

- ▶ Idea — scan the polynomial noise-only subspace  $Q_n(z)$  with broadband steering vectors

$$\Gamma(z, \vartheta) = \tilde{\mathbf{a}}_{\vartheta}(z) \tilde{\mathbf{Q}}_n(z) \mathbf{Q}_n(z) \mathbf{a}_{\vartheta}(z)$$

- ▶ looking for minima leads to a spatio-spectral PMUSIC

$$S_{\text{PSS-MUSIC}}(\vartheta, \Omega) = (\Gamma(z, \vartheta)|_{z=e^{j\Omega}})^{-1}$$

- ▶ and a spatial-only PMUSIC

$$S_{\text{PS-MUSIC}}(\vartheta) = \left( 2\pi \oint \Gamma(z, \vartheta)|_{z=e^{j\Omega}} d\Omega \right)^{-1} = \Gamma_{\vartheta}^{-1}[0]$$

with  $\Gamma_{\vartheta}[\tau] \circ \bullet \Gamma(z, \vartheta)$ .

## Simulation I — Toy Problem

- ▶ Linear uniform array with critical spatial and temporal sampling;
- ▶ broadband steering vector for end-fire position:

$$\mathbf{a}_{\pi/2}(z) = [1 \quad z^{-1} \quad \dots \quad z^{-M+1}]^T$$

- ▶ covariance matrix



$$\mathbf{R}(z) = \mathbf{a}_{\pi/2}(z)\tilde{\mathbf{a}}_{\pi/2}(z) = \begin{bmatrix} 1 & z^1 & \dots & z^{M-1} \\ z^{-1} & 1 & & \vdots \\ \vdots & & \ddots & \vdots \\ z^{-M+1} & \dots & \dots & 1 \end{bmatrix} .$$

- ▶ PEVD (by inspection)

$$\mathbf{Q}(z) = \mathbf{T}_{\text{DFT}} \text{diag}\{1 \quad z^{-1} \quad \dots \quad z^{-M+1}\} \quad ; \quad \mathbf{\Lambda}(z) = \text{diag}\{1 \quad 0 \quad \dots \quad 0\}$$


- ▶ simulations with  $M = 4 \dots$

# Simulation I — PSS-MUSIC

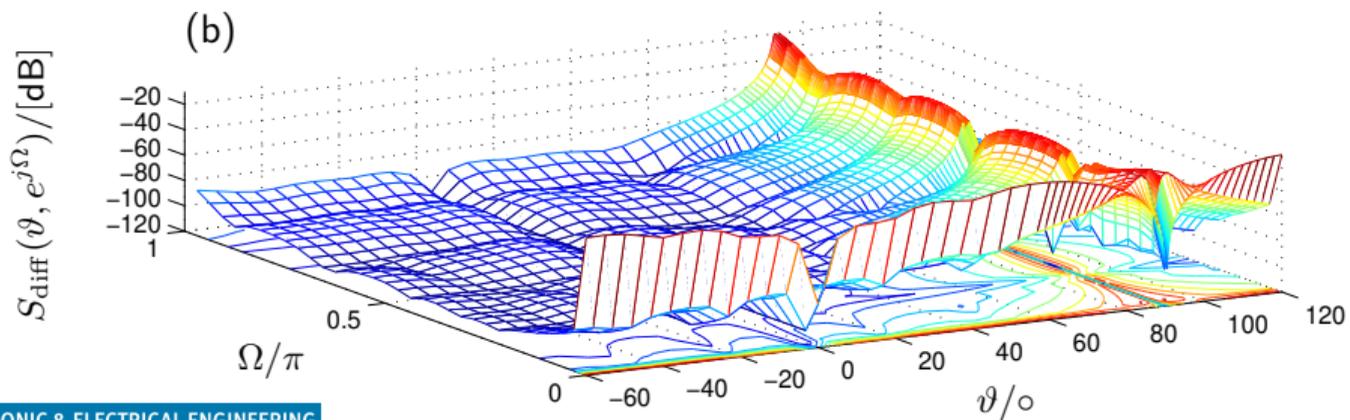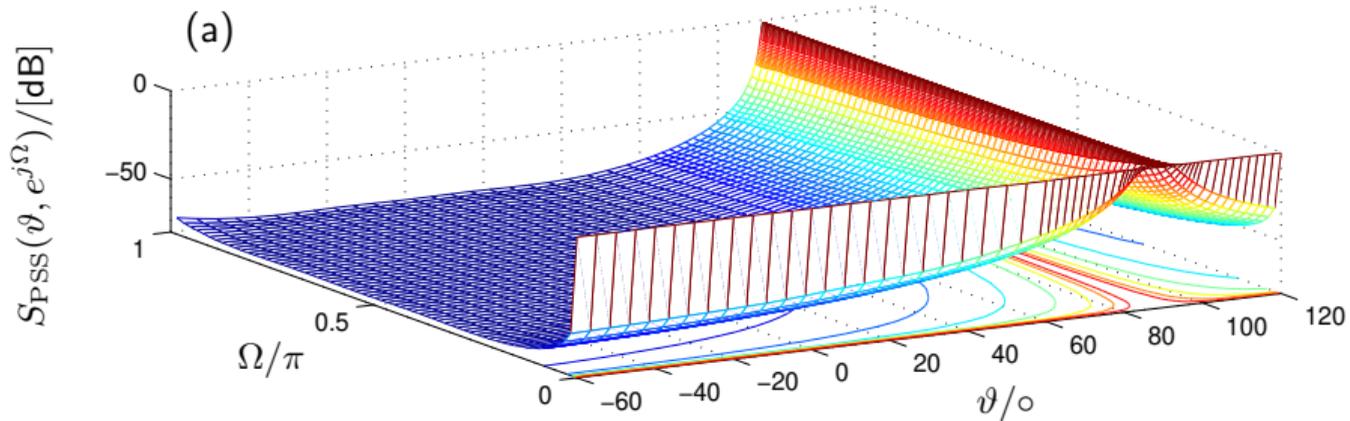



## Simulation II

- ▶  $M = 8$  element sensor array illuminated by three sources;
- ▶ source 1:  $\vartheta_1 = -30^\circ$ , active over range  $\Omega \in [\frac{3\pi}{8}; \pi]$ ;
- ▶ source 2:  $\vartheta_2 = 20^\circ$ , active over range  $\Omega \in [\frac{\pi}{2}; \pi]$ ;
- ▶ source 3:  $\vartheta_3 = 40^\circ$ , active over range  $\Omega \in [\frac{2\pi}{8}; \frac{7\pi}{8}]$ ; and

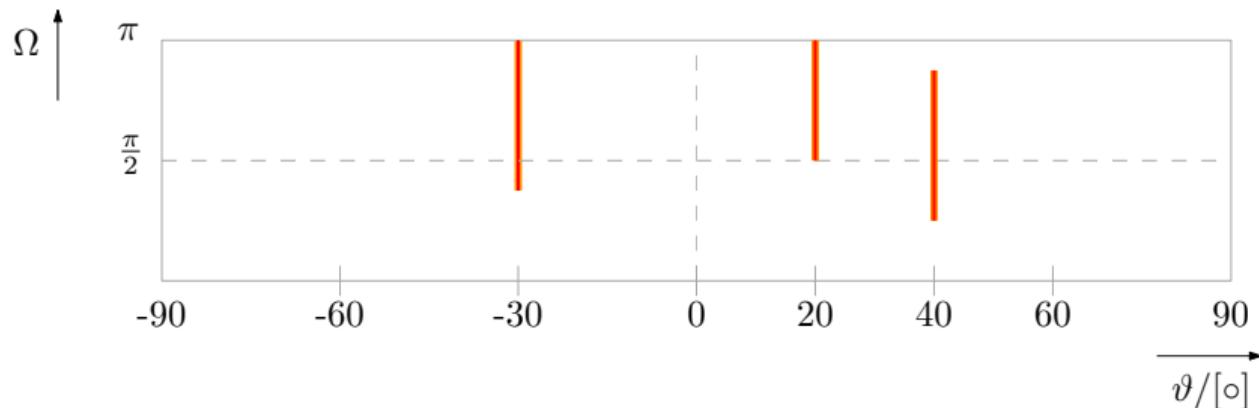


- ▶ filter banks as innovation filters, and broadband steering vectors to simulate AoA;
- ▶ space-time covariance matrix is estimated from  $10^4$  samples.

# Simulation II — PSS-MUSIC

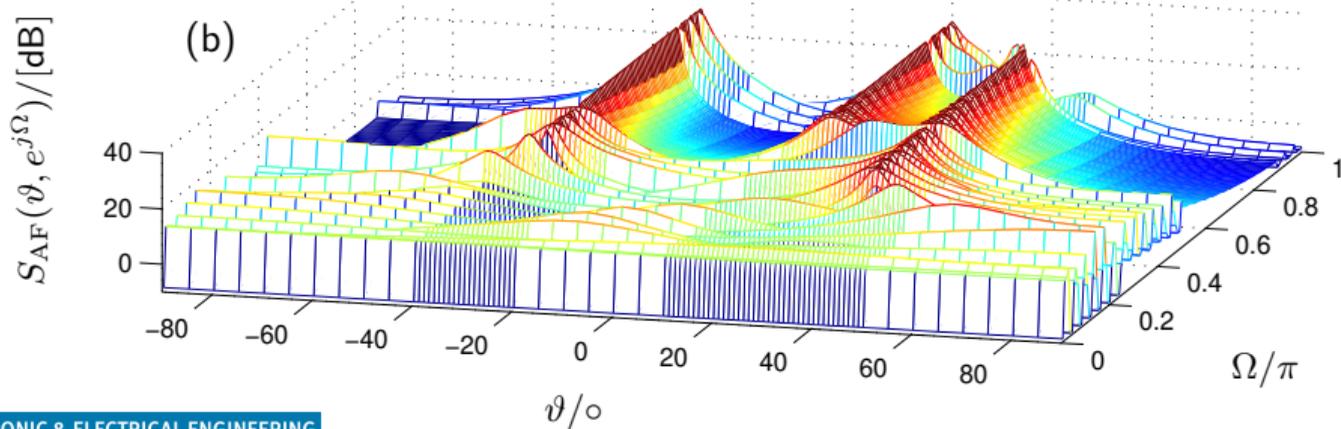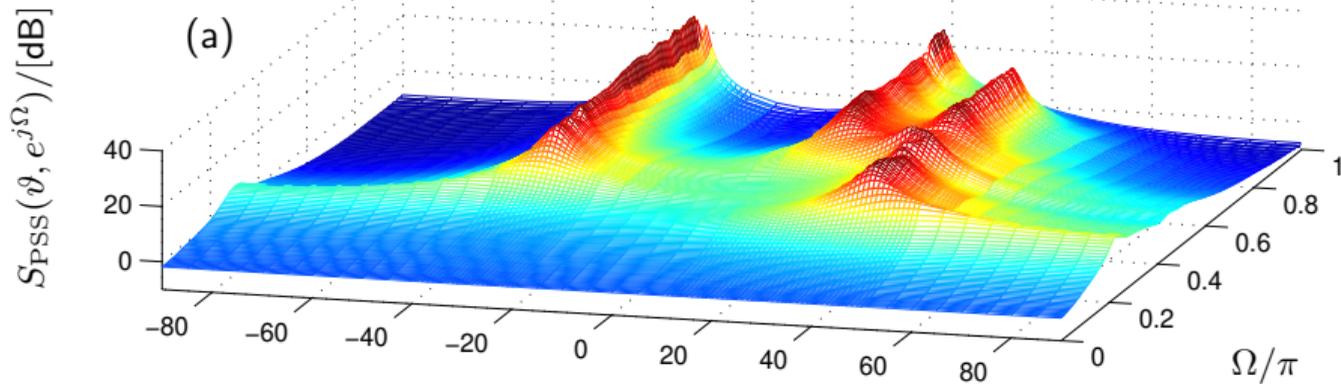


# PS-MUSIC Comparison

- ▶ Simulation I (toy problem): peaks normalised to unity:

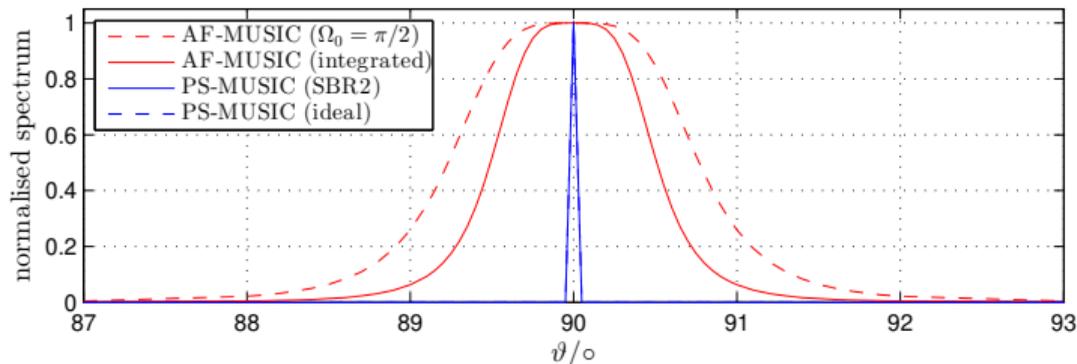

- ▶ Simulation II: inaccuracies on PEVD and broadband steering vector

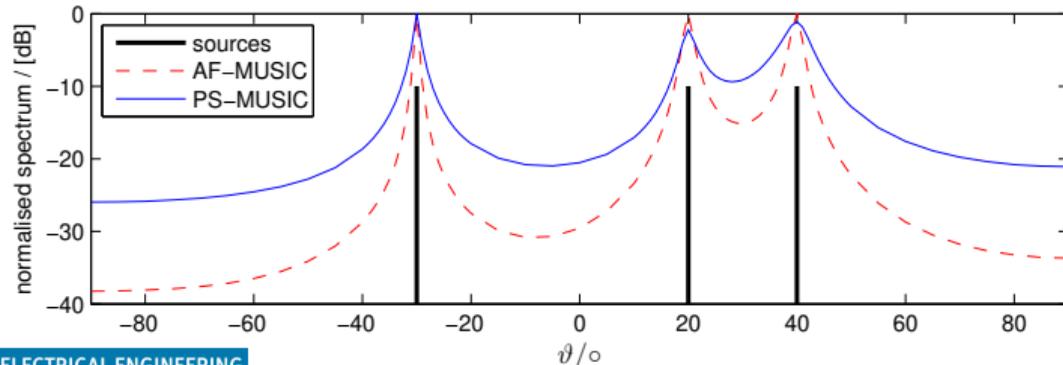


- ▶ We have considered the importance of SVD and EVD for narrowband source separation;
- ▶ narrowband matrix decomposition real the matrix rank and offer subspace decompositions on which angle-of-arrival estimation algorithms such as MUSIC can be based;
- ▶ broadband problems lead to a space-time covariance or CSD matrix;
- ▶ such polynomial matrices cannot be decomposed by standard EVD and SVD;
- ▶ a polynomial EVD has been defined;
- ▶ iterative algorithms such as SBR2 can be used to approximate the PEVD;
- ▶ this permits a number of applications, such as broadband angle of arrival estimation;
- ▶ broadband beamforming could then be used to separate broadband sources.

## Further Reading

- ▶ General idea of broadband MUSIC [11, 9, 10, 13, 129, 34];
- ▶ implementation of broadband steering vectors [69, 114, 12];
- ▶ polynomial MUSIC robust to multipath propagation [40, 41, 42];
- ▶ polynomial MUSIC applied to speech and audio [58].

# Narrowband Minimum Variance Distortionless Response Beamformer

- ▶ Scenario: an array of  $M$  sensors receives data  $\mathbf{x}[n]$ , containing a desired signal with frequency  $\Omega_s$  and angle of arrival  $\vartheta_s$ , corrupted by interferers;
- ▶ a narrowband beamformer applies a single coefficient to every of the  $M$  sensor signals:

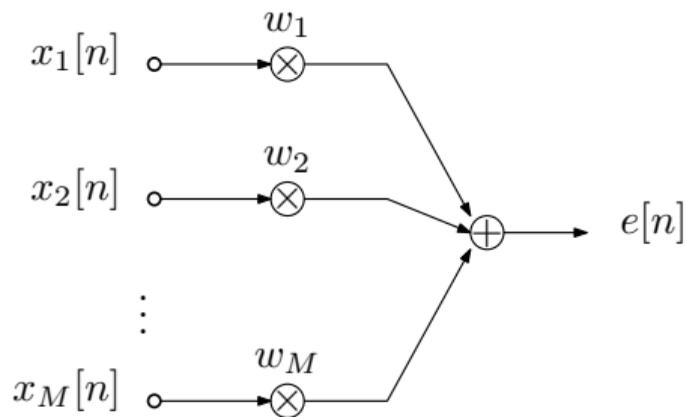

# Narrowband MVDR Problem



- ▶ Recall the space-time covariance matrix:

$$\mathbf{R}[\tau] = \mathcal{E}\{\mathbf{x}[n]\mathbf{x}^H[n - \tau]\}$$

- ▶ the MVDR beamformer minimises the output power of the beamformer:


$$\min_{\mathbf{w}} \mathcal{E}\{|e[n]|^2\} = \min_{\mathbf{w}} \mathbf{w}^H \mathbf{R}[0] \mathbf{w} \quad (46)$$

$$\text{s.t. } \mathbf{a}^H(\vartheta_s, \Omega_s) \mathbf{w} = 1, \quad (47)$$

- ▶ this is subject to protecting the signal of interest by a constraint in look direction  $\vartheta_s$ ;
- ▶ the steering vector  $\mathbf{a}_{\vartheta_s, \Omega_s}$  defines the signal of interest's parameters.

# Broadband MVDR Beamformer

- ▶ Each sensor is followed by a tap delay line of dimension  $L$ , giving a total of  $ML$  coefficients in a vector  $\mathbf{v} \in \mathbb{C}^{ML}$  [19, 18, 124]

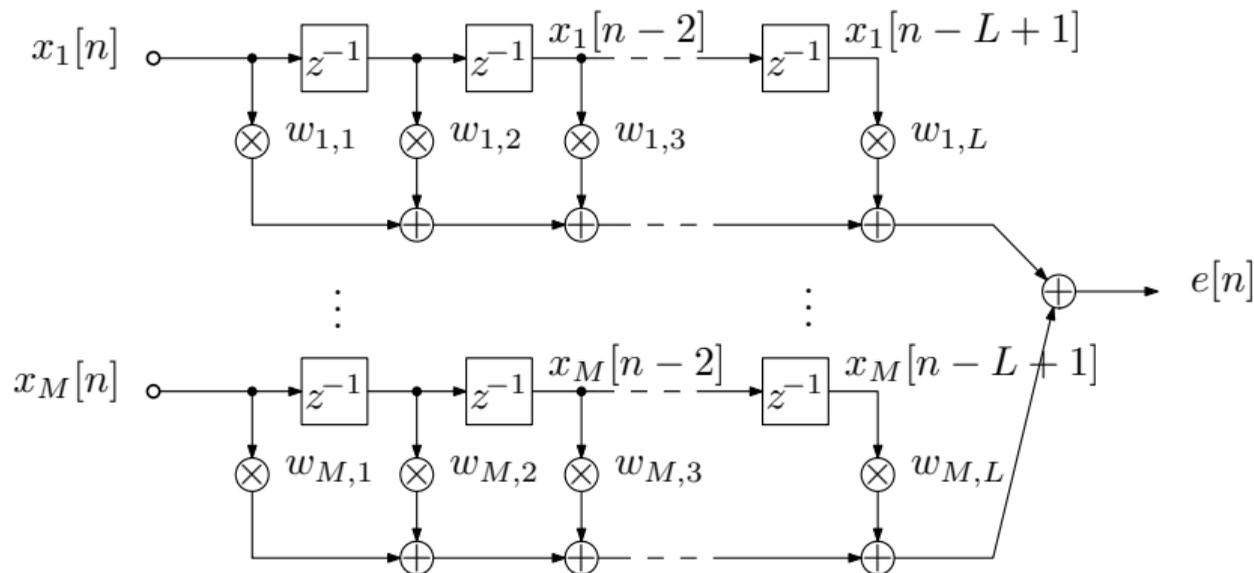

# Broadband MVDR Beamformer



- ▶ A larger input vector  $\mathbf{x}_n \in \mathbb{C}^{ML}$  is generated; also including lags;
- ▶ the general approach is similar to the narrowband system, minimising the power of  $e[n] = \mathbf{v}^H \mathbf{x}_n$ ;
- ▶ however, we require several constraint equations to protect the signal of interest, e.g.

$$\mathbf{C} = [\mathbf{s}(\vartheta_s, \Omega_0), \mathbf{s}(\vartheta_s, \Omega_1) \dots \mathbf{s}(\vartheta_s, \Omega_{L-1})] \quad (48)$$


- ▶ these  $L$  constraints pin down the response to unit gain at  $L$  separate points in frequency:

$$\mathbf{C}^H \mathbf{v} = \mathbf{1} ; \quad (49)$$

- ▶ generally  $\mathbf{C} \in \mathbb{C}^{ML \times L}$ , but simplifications can be applied if the look direction is towards broadside.

# Generalised Sidelobe Canceller

- ▶ A quiescent beamformer  $\mathbf{v}_q = (\mathbf{C}^H)^{\dagger} \mathbf{1} \in \mathbb{C}^{ML}$  picks the signal of interest;
- ▶ the quiescent beamformer is optimal for AWGN but generally passes structured interference;
- ▶ the output of the blocking matrix  $\mathbf{B}$  contains interference only, which requires  $[\mathbf{B}\mathbf{C}]$  to be unitary; hence  $\mathbf{B} \in \mathbb{C}^{ML \times (M-1)L}$ ;
- ▶ an adaptive noise canceller  $\mathbf{v}_a \in \mathbb{C}^{(M-1)L}$  aims to remove the residual interference:

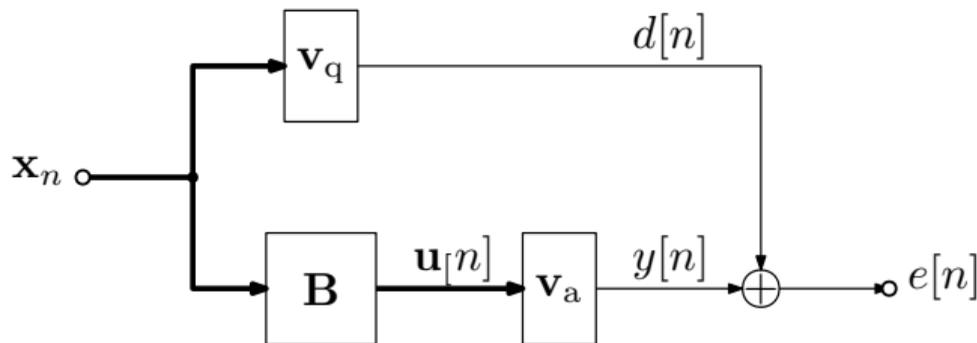

- ▶ note: all dimensions are determined by  $\{M, L\}$ .


# Polynomial Matrix MVDR Formulation

- ▶ Power spectral density of beamformer output:  $R_e(z) = \tilde{\mathbf{w}}(z)\mathbf{R}(z)\mathbf{w}(z)$
- ▶ proposed broadband MVDR beamformer formulation:

$$\min_{\mathbf{w}(z)} \oint_{|z|=1} R_e(z) \frac{dz}{z} \quad (50)$$


$$\text{s.t. } \tilde{\mathbf{a}}(\vartheta_s, z)\mathbf{w}(z) = F(z) . \quad (51)$$

- ▶ precision of broadband steering vector,  $|\tilde{\mathbf{a}}(\vartheta_s, z)\mathbf{a}(\vartheta_s, z) - 1|$ , depends on the length  $T$  of the fractional delay filter:

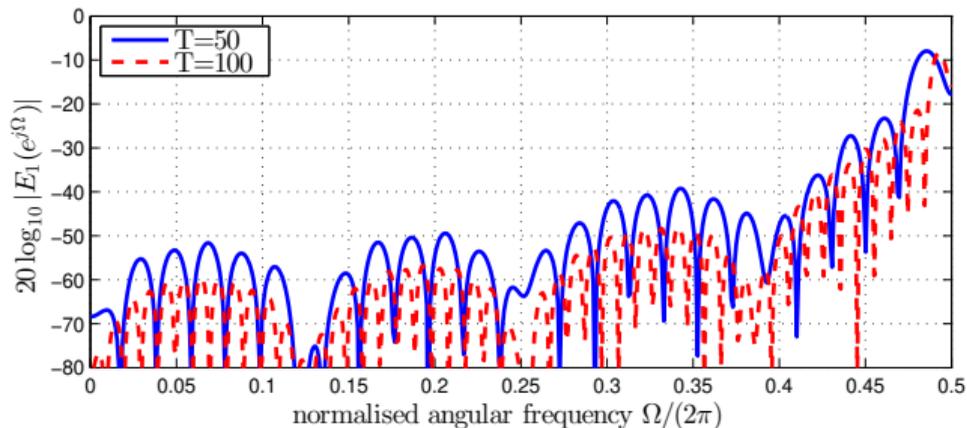

# Generalised Sidelobe Canceller


- ▶ Instead of performing constrained optimisation, the GSC projects the data and performs adaptive noise cancellation:

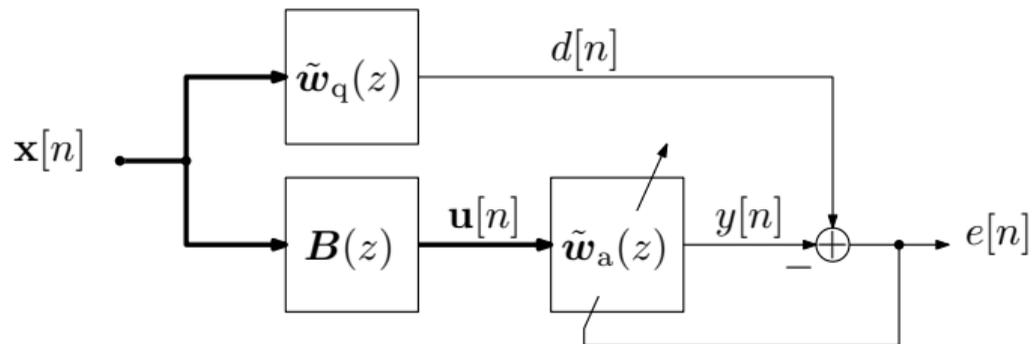

- ▶ the quiescent vector  $\mathbf{w}_q(z)$  is generated from the constraints and passes signal plus interference;
- ▶ the blocking matrix  $\mathbf{B}(z)$  has to be orthonormal to  $\mathbf{w}_q(z)$  and only pass interference.

# Design Considerations

- ▶ The blocking matrix can be obtained by completing a paraunitary matrix from  $\mathbf{w}_q(z)$ ;
- ▶ this can be achieved by calculating a PEVD of the rank one matrix  $\mathbf{w}_q(z)\tilde{\mathbf{w}}_q(z)$ ;
- ▶ this leads to a block matrix of order  $N$  that is typically greater than  $L$ ;
- ▶ maximum leakage of the signal of interest through the blocking matrix:

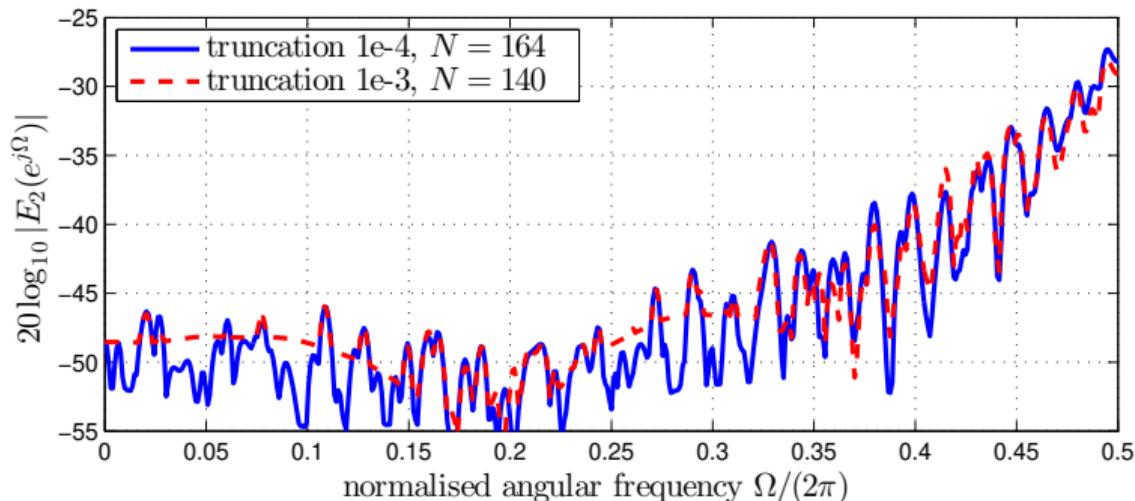

# Computational Cost




- ▶ With  $M$  sensors and a TDL length of  $L$ , the complexity of a standard beamformer is dominated by the blocking matrix;
- ▶ in the proposed design,  $\mathbf{w}_a \in \mathbb{C}^{M-1}$  has degree  $L$ ;
- ▶ the quiescent vector  $\mathbf{w}_q(z) \in \mathbb{C}^M$  has degree  $T$ ;
- ▶ the blocking matrix  $\mathbf{B}(z) \in \mathbb{C}^{(M-1) \times M}$  has degree  $N$ ;
- ▶ cost comparison in multiply-accumulates (MACs):

component	GSC cost	
	polynomial	standard
quiescent beamformer	$MT$	$ML$
blocking matrix	$M(M-1)N$	$M(M-1)L^2$
adaptive filter (NLMS)	$2(M-1)L$	$2(M-1)L$

## Example


- ▶ We assume a **signal of interest** from  $\vartheta = 30^\circ$ ;
- ▶ three **interferers** with angles  $\vartheta_i \in \{-40^\circ, -10^\circ, 80^\circ\}$  active over the frequency range  $\Omega = 2\pi \cdot [0.1; 0.45]$  at signal to interference ratio of -40 dB;

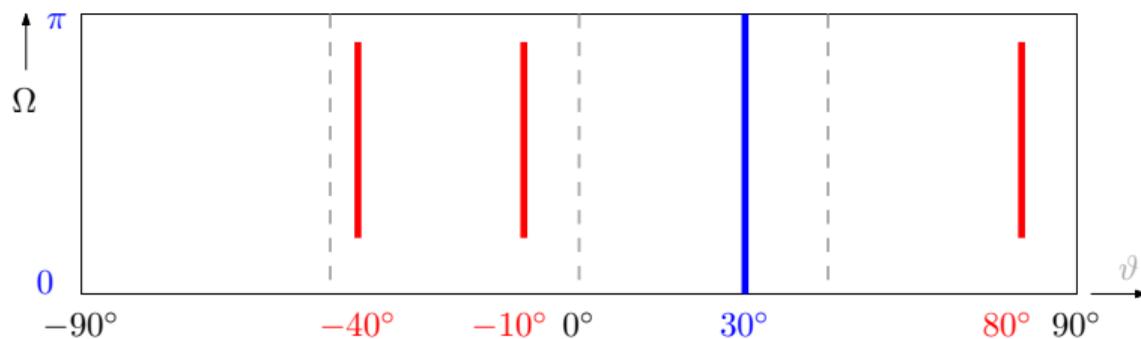

- ▶  $M = 8$  element linear uniform array is also corrupted by spatially and temporally white additive Gaussian noise at 20 dB SNR;
- ▶ parameters:  $L = 175$ ,  $T = 50$ , and  $N = 140$ ;
- ▶ cost per iteration: 10.7 kMACs (proposed) versus 1.72 MMACs (standard).


# Quiescent Beamformer

- ▶ Directivity pattern of quiescent standard broadband beamformer:

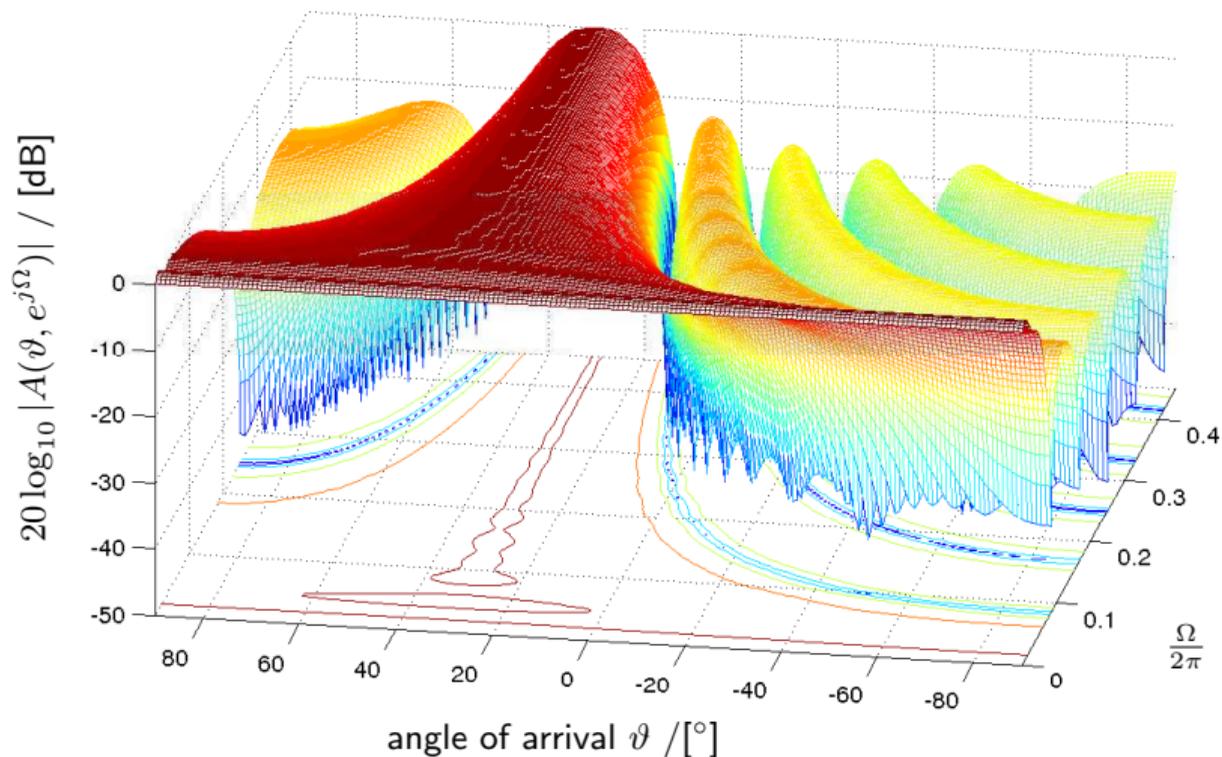


# Quiescent Beamformer

- ▶ Directivity pattern of quiescent proposed broadband beamformer:

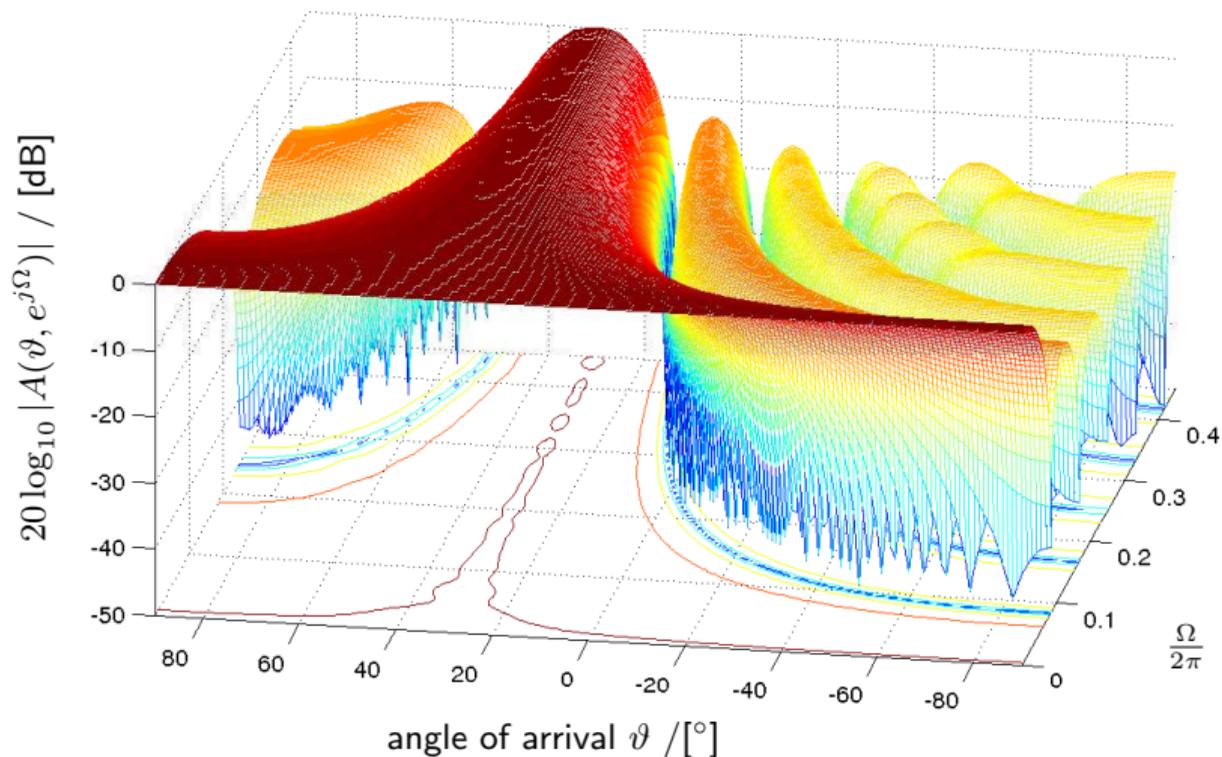


- ▶ Convergence curves of the two broadband beamformers, showing the residual mean squared error (i.e. beamformer output minus signal of interest):

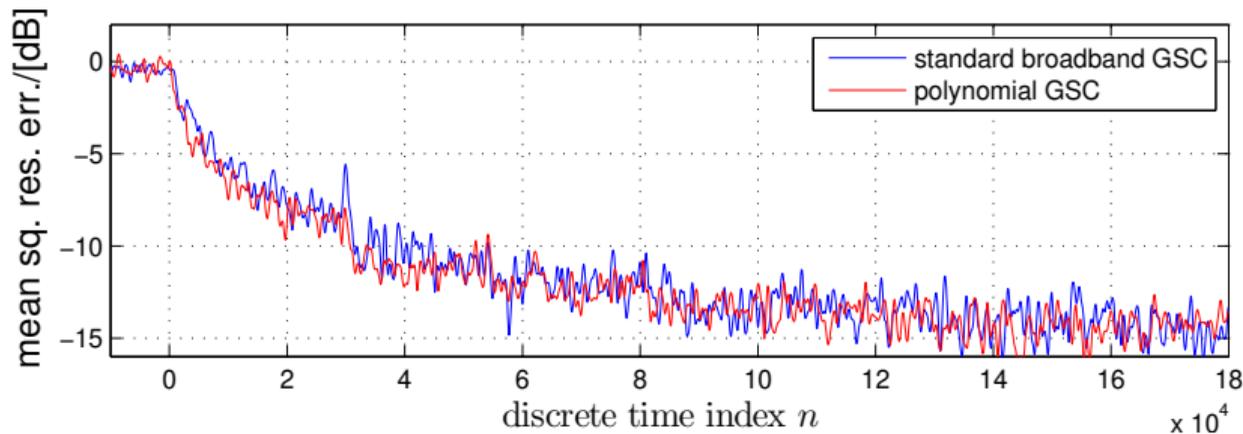


# Adapted Beamformer

- ▶ Directivity pattern of adapted proposed broadband beamformer:

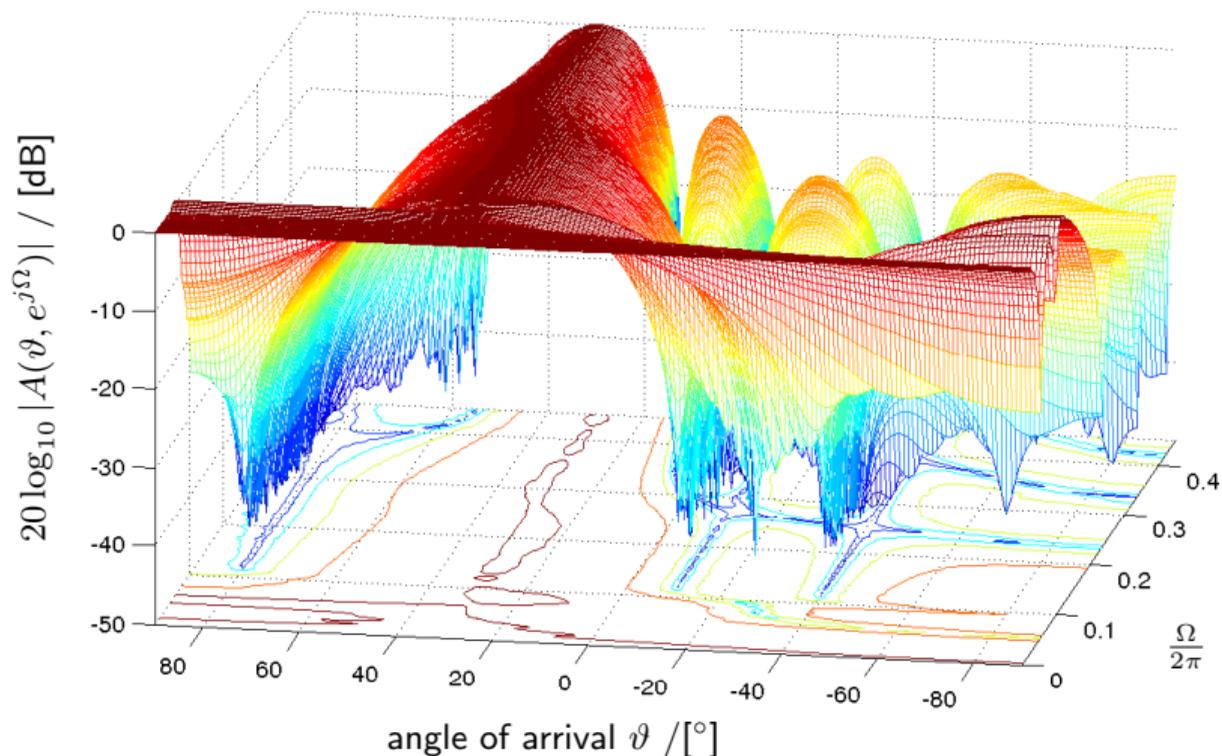


# Adapted Beamformer

- ▶ Directivity pattern of adapted standard broadband beamformer:

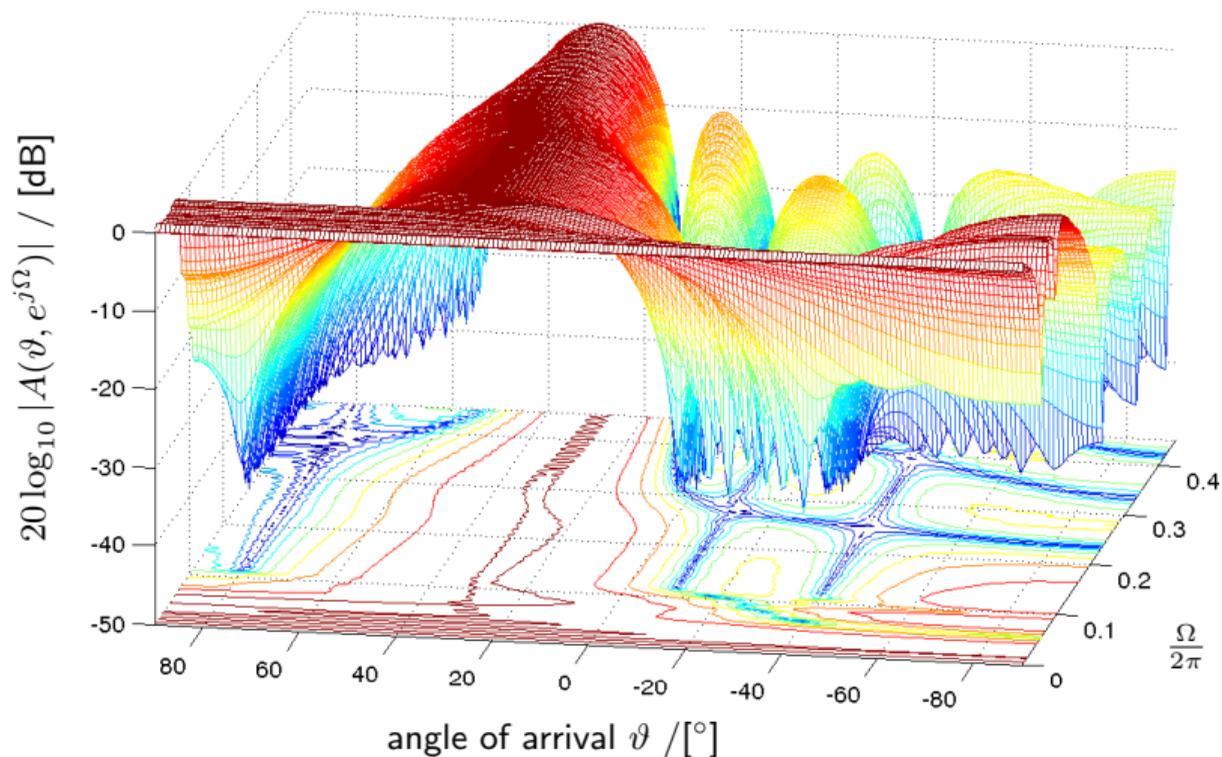

## Gain in Look Direction

- ▶ Gain in look direction  $\vartheta_s = 30^\circ$  before and after adaptation:

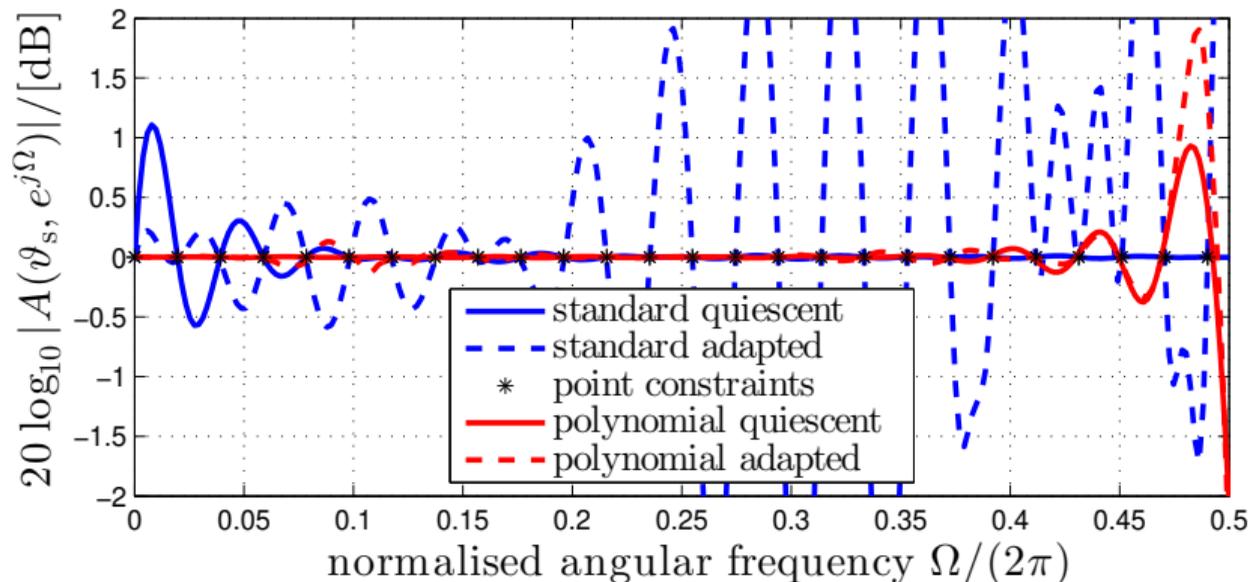

- ▶ due to signal leakage, the standard broadband beamformer after adaptation only maintains the point constraints but deviates elsewhere.

# Broadband Beamforming Conclusions




- ▶ Based on the previous AoA estimation, beamforming can help to extract source signals and thus perform “source separation”;
- ▶ broadband beamformers usually assume pre-steering such that the signal of interest lies at broadside;
- ▶ this is not always given, and difficult for arbitrary array geometries;
- ▶ the proposed beamformer using a polynomial matrix formulation can implement arbitrary constraints;
- ▶ the performance for such constraints is better in terms of the accuracy of the directivity pattern;
- ▶ because the proposed design decouples the complexities of the coefficient vector, the quiescent vector and block matrix, and the adaptive process, the cost is significantly lower than for a standard broadband adaptive beamformer.

- ▶ broadband beamforming [19, 18, 57, 77, 78, 76, 81, 80, 79, 82, 83, 75, 124, 143, 137, 146]
- ▶ implementation of broadband steering vectors [69, 114, 12];
- ▶ polynomial methods for beamforming [130, 15, 14];
- ▶ beamforming and source compression applied to speech and audio [101].

# Source Extraction Application

- ▶ We take  $M$ -array measurements of a single source:

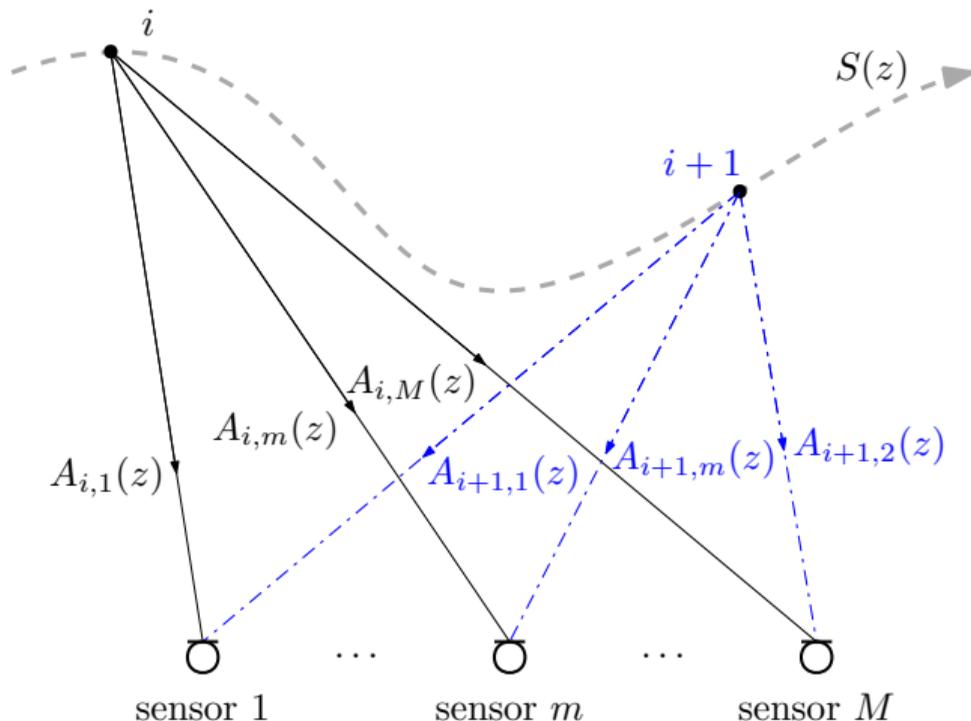

- ▶ 2nd order statistics:  $\mathbf{R}_i(z) = S(z)\mathbf{a}_i(z)\mathbf{a}_i^P(z) = \gamma_{i,m}(z)\mathbf{u}_i(z)\mathbf{u}_i^P$ .

## Application Example

- ▶ 2nd order stats:  $\mathbf{R}_i(z) = S(z)\mathbf{a}_i(z)\mathbf{a}_i^P(z) = \gamma_{i,m}(z)\mathbf{u}_i(z)\mathbf{u}_i^P$ ;
- ▶ difference:  $\mathbf{u}_i(z)$  is normal,  $\mathbf{u}_i^P(z)\mathbf{u}_i(z) = 1$ , while  $\mathbf{a}_i(z)$  is not:

$$\mathbf{a}_i^P(z)\mathbf{a}_i(z) = A_{i,(-)}(z)A_{i,(+)}(z) = A_{i,(+)}^P(z)A_{i,(+)}(z)$$

with minimum-phase  $A_{(+)}(z)$ ;

- ▶ therefore:

$$\mathbf{u}_i(z) = \frac{\mathbf{a}_i(z)}{A_{i,(+)}(z)}$$

$$\gamma_i(z) = A_{i,(+)}(z)S(z)A_{i,(+)}^P(z),$$

- ▶ for a single measurement, we can say nothing about  $\mathbf{a}_i^P(z)$  or  $S(z)$ .

## Application — Multiple Measurements

- ▶ If we have several measurements  $i = 1 \dots I$ :

$$\mathbf{u}_i(z) = \frac{\mathbf{a}_i(z)}{A_{i,(+)}(z)}$$
$$\gamma_i(z) = A_{i,(+)}(z)S(z)A_{i,(+)}^P(z),$$

- ▶ we can extract  $S(z)$  as the greatest common divisor

$$\hat{S}(z) = \text{GCD}\{\lambda_1(z) \dots \lambda_I(z)\}; \quad (52)$$

- ▶ we can also extract the  $A_{i,(+)}(z)$ , and hence determine the vectors  $\mathbf{a}_i(z)$  save of an arbitrary phase response.

## Application — Frequency Domain Attempt

- ▶ As an alternative, we take measurements in independent frequency bins:

$$\mathbf{R}_{i,k} = \mathbf{R}_i(e^{j\Omega_k}) = \mathbf{a}_i(e^{j\Omega_k})S(e^{j\Omega_k})\mathbf{a}_i^H(e^{j\Omega_k}) + \sigma_n^2\mathbf{I} \quad (53)$$

$$= \mathbf{q}_{i,k}\lambda_{i,k}\mathbf{q}_{i,k}^H. \quad (54)$$

- ▶ principal eigenvectors and eigenvalues for the measurement campaigns are


$$\mathbf{q}_{i,k} = \frac{\mathbf{a}_i(e^{j\Omega_k})}{|\mathbf{a}_i(e^{j\Omega_k})|}, \quad (55)$$

$$\lambda_{i,k} = S(e^{j\Omega_k})|\mathbf{a}_i(e^{j\Omega_k})|^2. \quad (56)$$

- ▶ because of the normalisation, nothing can be extracted about the source or the transfer functions.


## Application — Results I

- ▶ Eigenvalues / source PSD for two measurements  $i = \{0, 1\}$ :

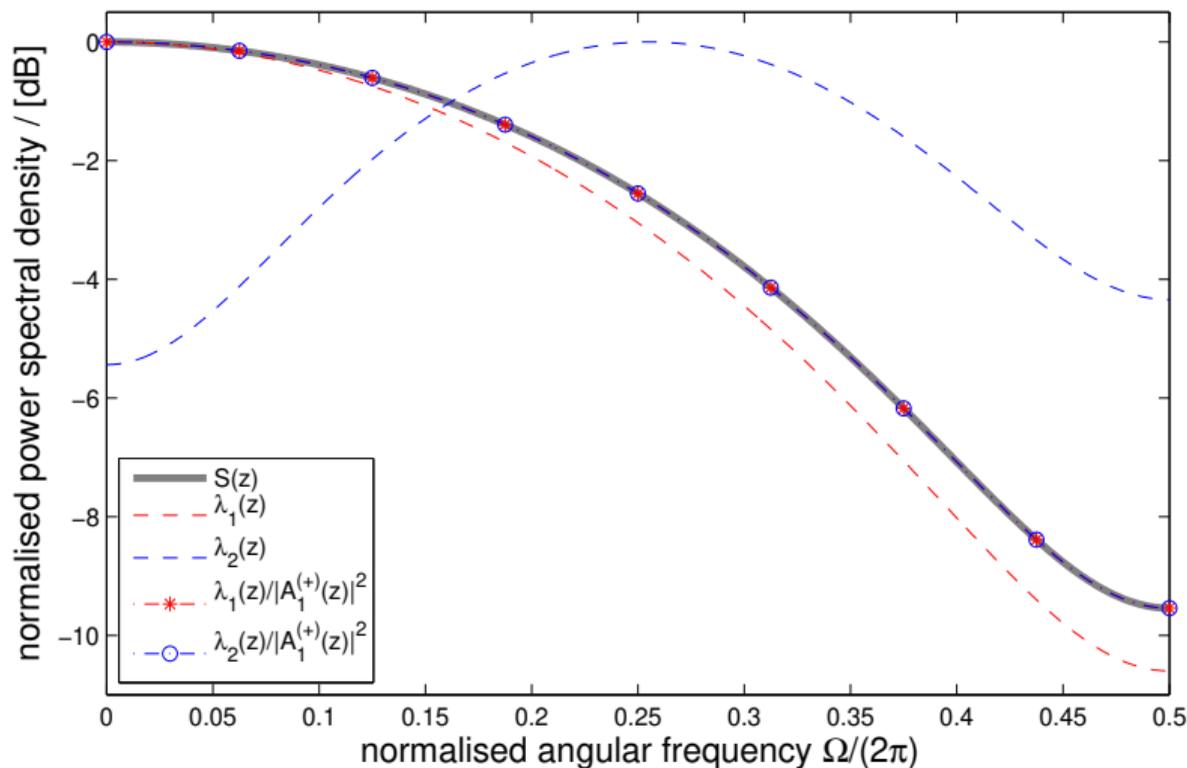

## Application — Results II


- ▶ Eigenvectors / magnitude response for measurement  $i = \{0\}$ :

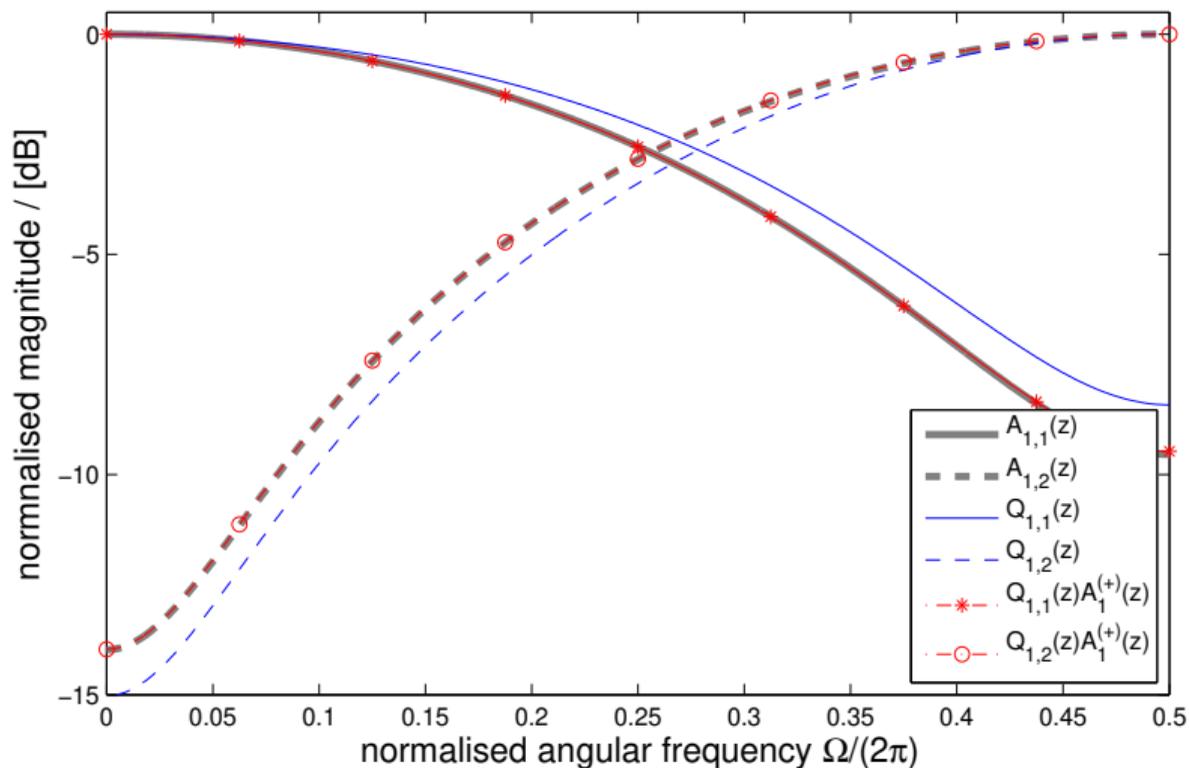

- ▶ we can extract the source PSD and the magnitude responses once we have at least two measurements;
- ▶ an independent frequency bin approach does not yield anything;
- ▶ the polynomial approach rests on an accurate parahermitian EVD, and an accurate root finding / GCD algorithm;
- ▶ root finding is numerically challenging;
- ▶ nevertheless the example gives a glimpse of the type of advantages that a “holistic” broadband approach offers [132];
- ▶ if impulse responses can be determined, it is possible to infer on the geometry of the environment [96];

# Problem & Model


- ▶ A number of broadband stationary sources  $s_\ell[n]$ ,  $\ell = 1, \dots, L$ , illuminate an  $M$ -element sensor array;
- ▶ each transfer path is modelled by a vector of impulse responses  $\mathbf{a}_\ell[n] \in \mathbb{C}^M$ ;
- ▶ stationary additive, spatially and temporally uncorrelated noise  $\mathbf{v}[n] \in \mathbb{C}^M$ ;

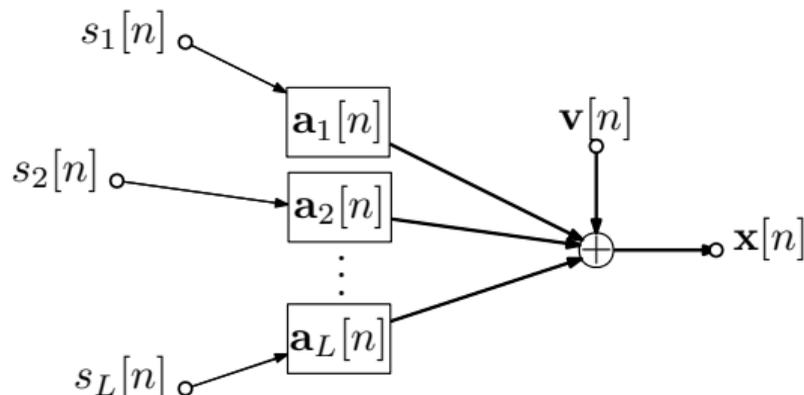

$$\mathbf{x}[n] = \sum_{\ell=1}^L \mathbf{a}_\ell[n] * s_\ell[n] + \mathbf{v}[n]$$

# Problem & Model

- ▶ A number of broadband stationary sources  $s_\ell[n]$ ,  $\ell = 1, \dots, L$ , illuminate an  $M$ -element sensor array;
- ▶ each transfer path is modelled by a vector of impulse responses  $\mathbf{a}_\ell[n] \in \mathbb{C}^M$ ;
- ▶ stationary additive, spatially and temporally uncorrelated noise  $\mathbf{v}[n] \in \mathbb{C}^M$ ;
- ▶ a broadband transient signal  $s_{L+1}[n]$  enters the scene at some point in time;
- ▶ aim: we want to detect the onset of this transient signal, which may be weak in power [131];
- ▶ assumption:  $M > L$ .

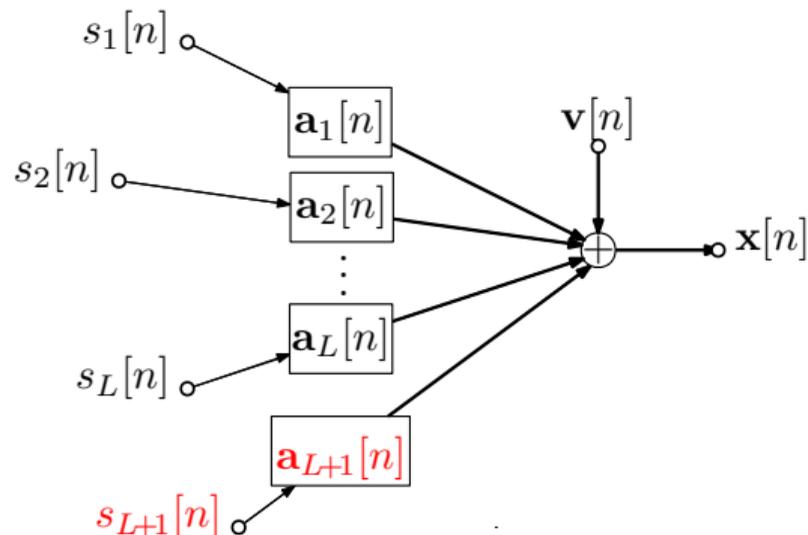


$$\mathbf{x}[n] = \sum_{\ell=1}^{L+1} \mathbf{a}_\ell[n] * s_\ell[n] + \mathbf{v}[n]$$

- ▶ Each source,  $s_\ell[n]$ , contributes to the data vector  $\mathbf{x}[n] = [x_1[n], \dots, x_M[n]]^T$  via a steering vector

$$\mathbf{a}_\ell[n] = [A_{\ell,1}[n], \dots, A_{\ell,M}[n]]^T;$$

- ▶ compact with  $\mathbf{A}[n] = [\mathbf{a}_1[n] \dots \mathbf{a}_L[n]]$  and  $\mathbf{s}[n] = [s_1[n], \dots, s_L[n]]^T$ :

$$\mathbf{x}[n] = \mathbf{A}[n] * \mathbf{s}[n] + \mathbf{v}[n];$$

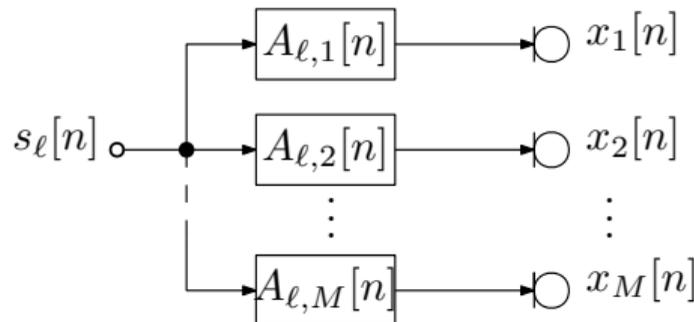

- ▶ space-time covariance:  $\mathbf{R}[\tau] = \mathcal{E}\{\mathbf{x}[n]\mathbf{x}^H[n - \tau]\}$ :

$$\mathbf{R}[\tau] = \mathbf{A}[\tau] * \mathcal{E}\{\mathbf{s}[n]\mathbf{s}^H[n - \tau]\} * \mathbf{A}^H[-\tau] + \mathcal{E}\{\mathbf{v}[n]\mathbf{v}^H[n - \tau]\} \quad (57)$$

$$= \mathbf{A}[\tau] * \mathbf{\Gamma}[\tau] * \mathbf{A}^H[-\tau] + \sigma_v^2 \mathbf{I}_M \delta[\tau]. \quad (58)$$

# Cross-Spectral Density Matrix


- ▶ Transfer function matrix  $\mathbf{A}(z) = \sum_n \mathbf{A}[n]z^{-n}$  (short  $\mathbf{A}(z) \bullet \text{---} \circ \mathbf{A}[n]$ ) is a polynomial in  $z \in \mathbb{C}$ ;

- ▶ cross-spectral density  $\mathbf{R}(z) \bullet \text{---} \circ \mathbf{R}[\tau]$ :

$$\mathbf{R}(z) = \mathbf{A}(z)\mathbf{\Gamma}(z)\mathbf{A}^P(z) + \sigma_v^2\mathbf{I}_M ;$$

- ▶ parahermitian property:

$$\mathbf{R}^P(z) = \mathbf{R}^H(1/z^*) = \mathbf{R}(z) ;$$

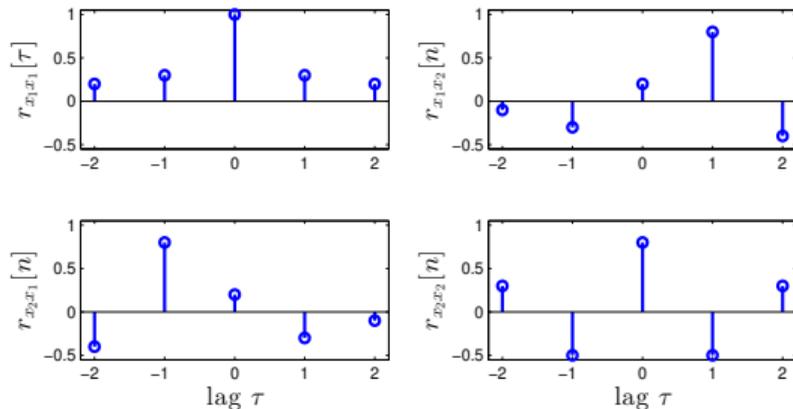

- ▶ when evaluated for a specific normalised angular frequency  $\Omega_0$ :  $\mathbf{R}_0 = \mathbf{R}(z)|_{z=e^{j\Omega_0}}$ ;
- ▶  $\mathbf{R}_0$  is a constant matrix that describes a *narrowband* problem;
- ▶  $\mathbf{R}_0$  is Hermitian  $\rightarrow$  eigenvalue decomposition (EVD)  $\mathbf{R}_0 = \mathbf{Q}_0\mathbf{\Lambda}_0\mathbf{Q}_0^H$ .

# Narrowband EVD and Subspace Decomposition

- ▶ We assume an ordered EVD  $\mathbf{R}_0 = \mathbf{Q}_0 \mathbf{\Lambda}_0 \mathbf{Q}_0^H$ , where  $\mathbf{\Lambda}_0 = \text{diag}\{\lambda_1, \dots, \lambda_M\}$  with  $\lambda_\ell \geq \lambda_{\ell+1}$ ,  $\ell = 1, \dots, (M - 1)$ ;
- ▶ partitioning enables a subspace decomposition:

$$\mathbf{R}_0 = \begin{array}{|c|c|} \hline \mathbf{Q}_s & \mathbf{Q}_n \\ \hline \end{array} \begin{array}{|c|c|} \hline \mathbf{\Lambda}_s + \sigma_v^2 \mathbf{I}_L & \\ \hline \sigma_v^2 \mathbf{I}_{M-L} & \\ \hline \end{array} \begin{array}{|c|} \hline \mathbf{Q}_s^H \\ \hline \mathbf{Q}_n^H \\ \hline \end{array}$$

- ▶ source enumeration: eigenvalues above noise floor = number of uncorrelated sources;
- ▶  $\mathbf{y}[n] = \mathbf{Q}_n^H \mathbf{x}[n] \in \mathbb{C}^{M-L}$  only contains noise;
- ▶ power in  $\mathbf{y}[n]$ :  $\mathcal{E}\{\|\mathbf{y}[n]\|_2^2\} = (M - L)\sigma_v^2$  because of orthonormality of  $\mathbf{Q}$ .

- ▶ Space-time covariance  $\mathbf{R}[\tau]$  or equivalently the CSD matrix  $\mathbf{R}(z)$  are only diagonalised by the EVD for a specific value  $\tau$  or  $z$ ;
- ▶ for an analytic  $\mathbf{R}(z)$  that is not derived from multiplexed data, there exists a parahermitian matrix EVD [134, 135]

$$\mathbf{R}(z) = \mathbf{Q}(z)\mathbf{\Lambda}(z)\mathbf{Q}^P(z) ; \quad (59)$$

- ▶  $\mathbf{\Lambda}(z)$  is diagonal, parahermitian, analytic, and unique;
- ▶ eigenvectors in  $\mathbf{Q}(z)$  are paraunitary, analytic, and unique up to an arbitrary allpass function;
- ▶ paraunitarity  $\mathbf{Q}(z)\mathbf{Q}^P(z) = \mathbf{Q}^P(z)\mathbf{Q}(z) = \mathbf{I}$  implies losslessness;
- ▶ a number of algorithms can approximate (59) [86, 107, 108, 140, 136, 139].

# Broadband Subspace Decomposition

- ▶ The parahermitian matrix EVD  $\mathbf{R}(z) = \mathbf{Q}(z)\mathbf{\Lambda}(z)\mathbf{Q}^P(z)$  enables a broadband subspace decomposition:

$$\mathbf{R}(z) = \begin{array}{|c|c|} \hline \mathbf{Q}_s(z) & \mathbf{Q}_n(z) \\ \hline \end{array} \begin{array}{|c|c|} \hline \mathbf{\Lambda}_s(z) & \\ \hline + \sigma_v^2 \mathbf{I}_L & \\ \hline \hline & \sigma_v^2 \mathbf{I}_{M-L} \\ \hline \end{array} \begin{array}{|c|} \hline \mathbf{Q}_s^P(z) \\ \hline \hline \mathbf{Q}_n^P(z) \\ \hline \end{array}$$


- ▶  $\mathbf{Q}[n] \circ \bullet \mathbf{Q}(z)$  describes a lossless filter bank;
- ▶ data vector component in the noise-only subspace:  $\mathbf{y}[n] = \mathbf{Q}_n^H[-n] * \mathbf{x}[n]$ ;
- ▶ again, it can be shown that ideally  $\mathcal{E}\{\|\mathbf{y}[n]\|_2^2\} = (M - L)\sigma_v^2$ .

## 'Syndrome' Idea

- ▶ We estimate  $\mathbf{R}(z)$  over a window of data, with  $L < M$  stationary sources present;
- ▶ compute parahermitian matrix EVD, perform source enumeration, and determine the eigenvectors spanning the noise-only subspace,  $\mathbf{Q}_n(z)$ ;
- ▶ if an additional source  $s_{L+1}[n]$  enters the scene, it will likely protrude into the noise-only subspace;
- ▶ we therefore monitor the syndrome vector


$$\mathbf{y}[n] = \mathbf{Q}_n^H[-n] * \mathbf{x}[n] \quad (60)$$

for a change in power, or for any structured / correlated components.

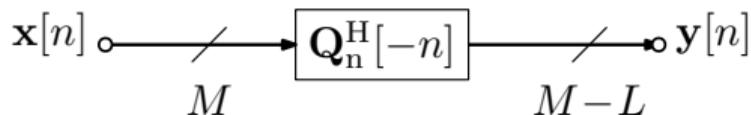


# Intuitive Example I

- ▶  $M = 6$  sensors,  $L = 3$  stationary sources; weak transient source at  $n = 5000$ ;
- ▶ monitoring a sensor output  $x_1[n]$ :

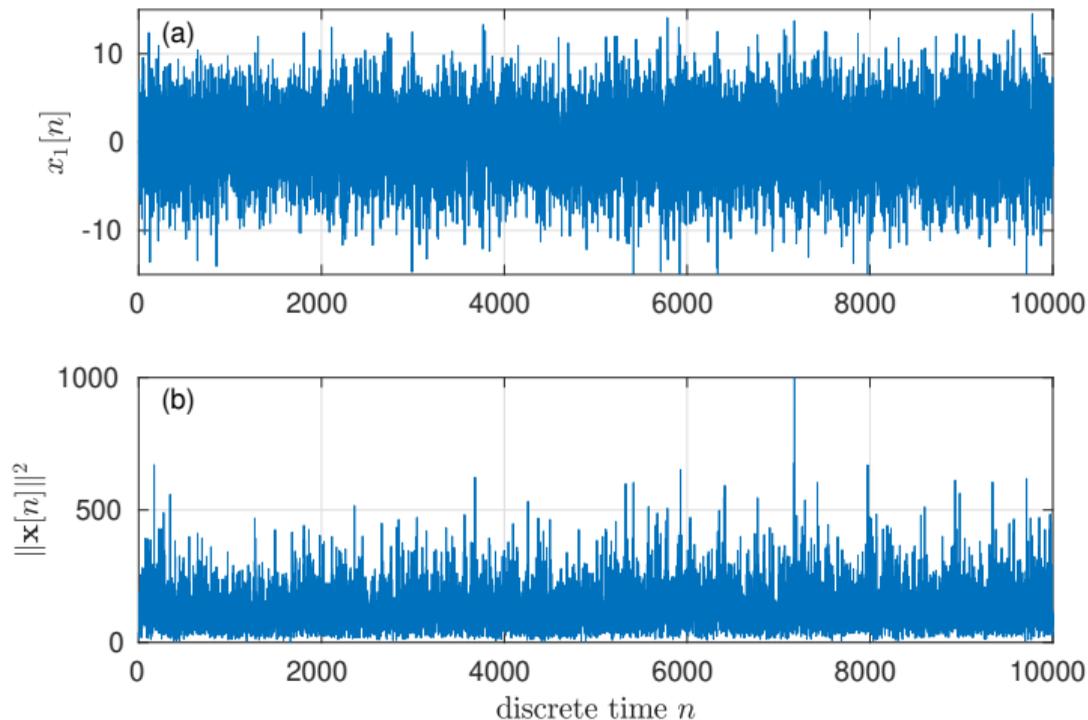


## Intuitive Example II

- ▶  $M = 6$  sensors,  $L = 3$  stationary sources; weak transient source at  $n = 5000$ ;
- ▶ monitoring a syndrome element  $z_1[n]$ :

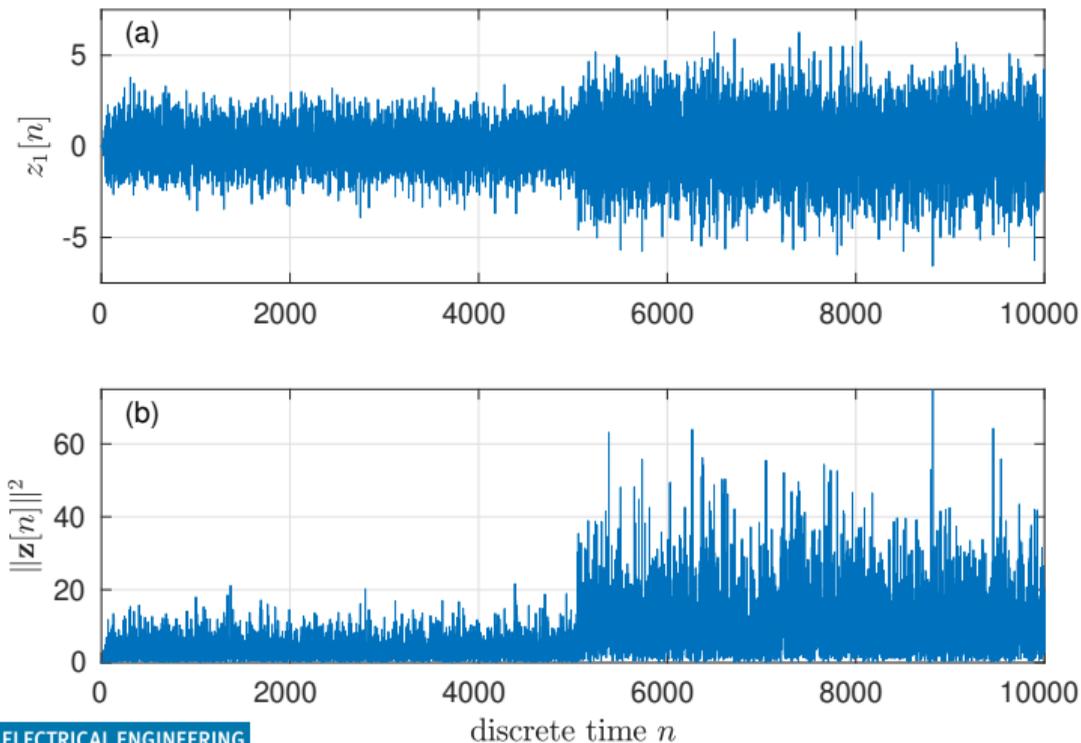

## Proposed Approach


- ▶ We use the statistics and evaluated parahermitian matrix EVD of a previous time window, and utilise the broadband noise-only subspace spanned by the columns of  $\mathbf{Q}_n(z)$ ;
- ▶ being analytic,  $\mathbf{Q}_n(z)$  can typically be approximated well by low-order polynomials, and is relatively inexpensive to implement;

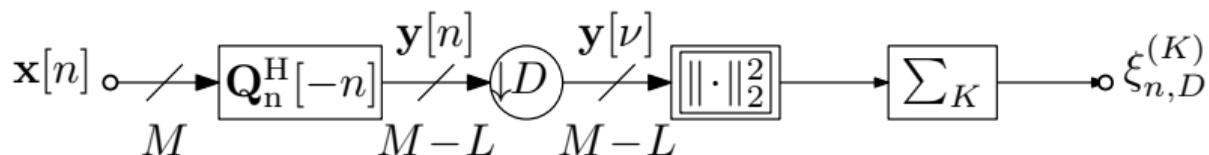

- ▶ because of the processing, elements of the syndrome vector  $\mathbf{y}[n]$  are spatially and temporally correlated;
- ▶ decimation by  $D$  can break temporal correlation and further reduces complexity;
- ▶ we can average over consecutive syndrome vectors to increase discrimination;
- ▶  $\xi_{n,D}^{(K)}$  is generalised  $\chi^2$  distributed if temporal correlation is suppressed [115, 43].

# Decimated Processor


- ▶ The proposed subspace projection is followed by a decimation by  $D$ :

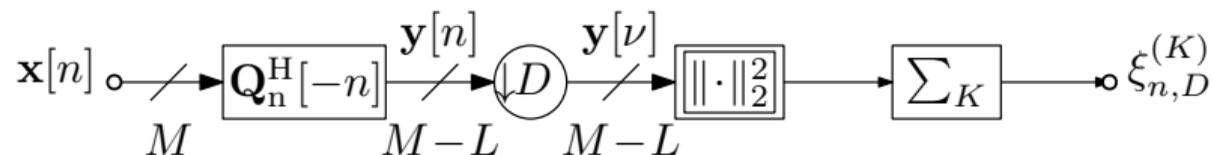

- ▶ cost advantage: a polyphase implementation integrates the decimation with the processor, reducing operations by a factor of  $D$ ;
- ▶ temporal decorrelation: if the temporal correlation does not exceed  $D$  lags, the decimation will temporally decorrelate subsequent snapshots of the syndrome vector  $\mathbf{y}[\nu]$ .


## Results I — Statistics

- ▶  $M = 6$  sensors,  $L = 2$  stationary sources, transfer functions determined by radio propagation model for dense urban environment (polynomial order  $\approx 40$ );
- ▶ statistics of output for  $I_0$ : no transient versus  $I_1$ : transient present;  $K = 1$ ;

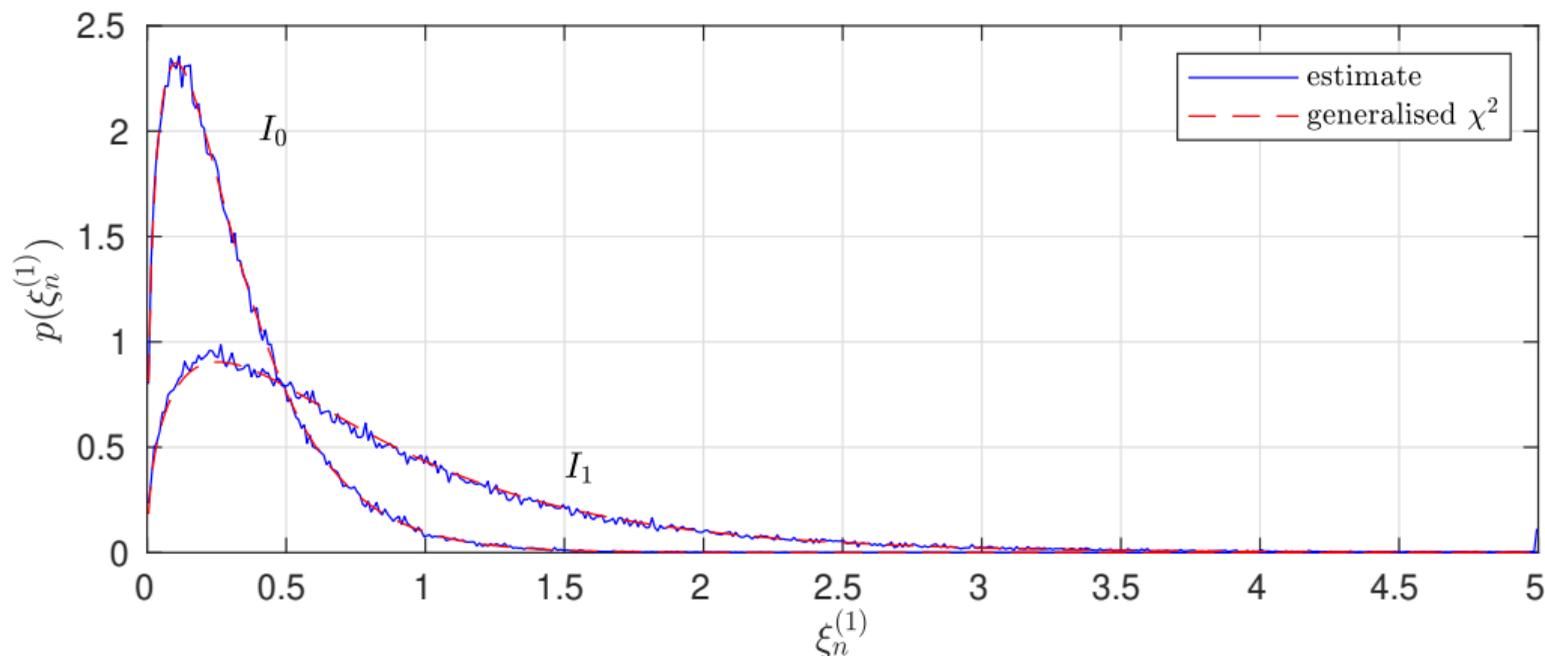

## Results I — Statistics

- ▶  $M = 6$  sensors,  $L = 2$  stationary sources, transfer functions determined by radio propagation model for dense urban environment (polynomial order  $\approx 40$ );
- ▶ statistics of output for  $I_0$ : no transient versus  $I_1$ : transient present;  $K = 10$ ;

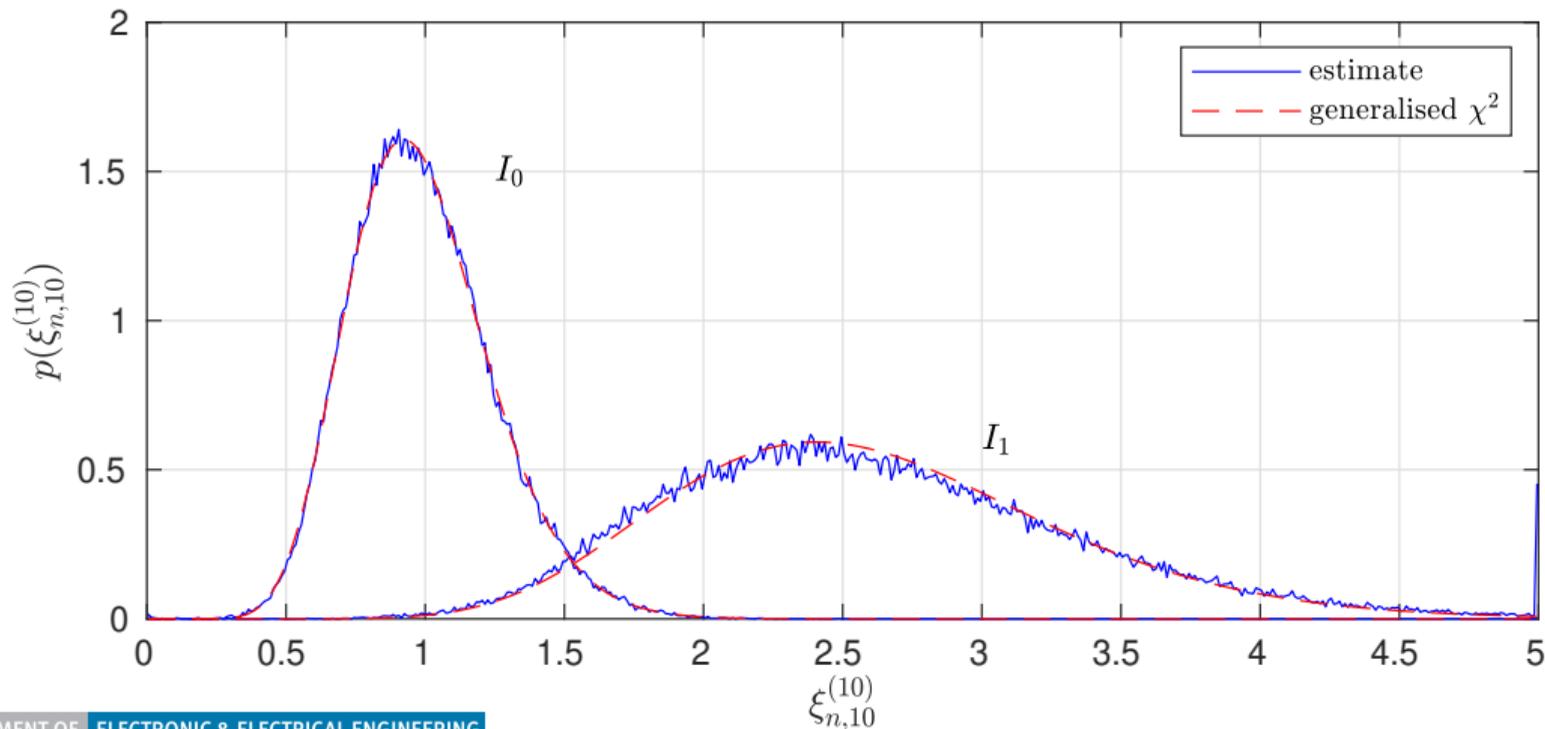

## Results II — Sources and Propagation Environment


- ▶ Realistic 20MHz urban scenario with dispersive impulse responses;
- ▶  $M = 6$  sensors;
- ▶ total power of contributions of three different sources:

signal	power
source 1	0.0000 dB
source 2	-4.3494 dB
source 3	-13.2865 dB
noise	-16.2865 dB

- ▶ we use either source 2 or 3 as transient signal; the two remaining sources are stationary.

## Results III — Discrimination vs Decision Time

- ▶ Averaging increasingly separates the distributions for  $I_0$  and  $I_1$  — measured as discrimination  $\mathcal{D}$ : derived from the ROC [54];
- ▶ averaging also increases the time to compute  $\xi_{n,D}^{(T)} \rightarrow$  decision time  $\mathcal{T}$  (for a 20MHz channel);
- ▶  $N$  here is the window over which the space-time covariance is estimated [45, 46, 47]

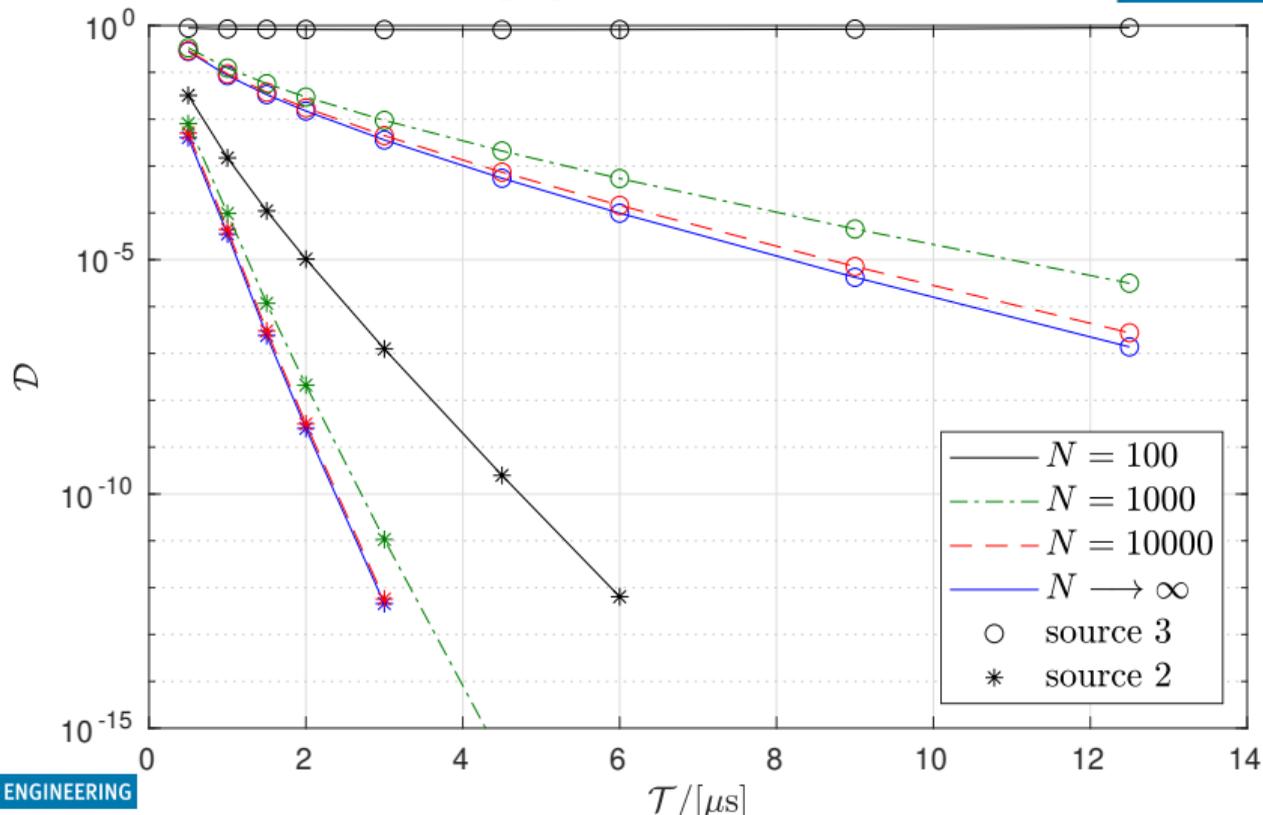

# Summary



- ▶ We have discussed a broadband subspace approach to detect the presence of weak transient signals;
- ▶ this is based on second order statistics of sensor array data — the space-time covariance matrix — and a polynomial matrix EVD;
- ▶ this covariance matrix and its decomposition can be computed off-line; for low-cost implementations, see e.g. [36, 67]
- ▶ a subspace decomposition for the noise-only subspace determines a syndrome vector;
- ▶ in the absence of a transient signal, this syndrome only contains noise;
- ▶ a transient signal is likely to protrude into the noise-only subspace, and a change in energy can be detected even if the signal is weak;
- ▶ discrimination can be traded off against decision time;
- ▶ in audio, the approach is utilised to detect the onset of weak speakers;
- ▶ in future, we may investigate time-varying channels and subspace leakage.

- ▶ the idea of a syndrome vector to detecting weak transient RF signals is described in [131];
- ▶ a similar approach to detecting transient signals has been applied in the speech domain, where the detection of a step change in energy can be accomplished by a voice activity detector [105, 104];

# References I

- [1] W. Al-Hanafy, A. P. Millar, C. H. Ta, and S. Weiss.  
Broadband SVD and non-linear precoding applied to broadband MIMO channels.  
*In 42nd Asilomar Conference on Signals, Systems and Computers*, pages 2053–2057, Pacific Grove, CA, USA, Oct. 2008.
- [2] W. Al-Hanafy and S. Weiss.  
Comparison of precoding methods for broadband mimo systems.  
*In Third International Workshop on Computational Advances in Multi-Sensor Adaptive Processing*, Aruba, Dutch Antilles, Dec. 2009.
- [3] W. Al-Hanafy and S. Weiss.  
A new low-cost discrete bit loading using greedy power allocation.  
*In Third Mosharaka International Conference on Communications, Computers and Applications*, Amman, Jordan, October 2009.  
(best paper award).
- [4] W. Al-Hanafy and S. Weiss.  
Sum-rate maximisation comparison using incremental approaches with different constraints.  
*In Third Mosharaka International Conference on Communications, Computers and Applications*, Amman, Jordan, October 2009.
- [5] W. Al-Hanafy and S. Weiss.  
Greedy power allocation for multicarrier systems with reduced complexity.  
*In National Radio Science Conference*, Menoufia, Egypt, March 2010.
- [6] W. Al-Hanafy and S. Weiss.  
Reduced complexity schemes to greedy power allocation for multicarrier systems.  
*In 18th International Conference on Microwave, Radar and Wireless Communications*, 2010.
- [7] W. Al-Hanafy and S. Weiss.  
Trade-off between complexity and ber performance of a polynomial svd-based broadband mimo transceiver.  
*In 27th National Radio Science Conference*, Menoufia, Egypt, March 2010.

# References II

- [8] W. Al-Hanafy and S. Weiss.  
An adaptive modulation precoding scheme for mean ber minimisation of isi mimo channels.  
In *19th European Signal Processing Conference*, pages 1638–1642, Barcelona, Spain, August 2011.
- [9] M. Alrmah, M. Hussin, S. Weiss, and S. Lambotharan.  
Comparison of broadband direction of arrival estimation algorithms.  
In *9th IMA Mathematics in Signal Processing Conference*, Birmingham, UK, December 2012.
- [10] M. Alrmah and S. Weiss.  
Filter bank based fractional delay filter implementation for widely accurate broadband steering vectors.  
In *5th IEEE International Workshop on Computational Advances in Multi-Sensor Adaptive Processing*, Saint Martin, December 2013.
- [11] M. Alrmah, S. Weiss, and S. Lambotharan.  
An extension of the MUSIC algorithm to broadband scenarios using polynomial eigenvalue decomposition.  
In *19th European Signal Processing Conference*, pages 629–633, Barcelona, Spain, August 2011.
- [12] M. Alrmah, S. Weiss, and J. McWhirter.  
Implementation of accurate broadband steering vectors for broadband angle of arrival estimation.  
In *IET Intelligent Signal Processing*, London, UK, December 2013.
- [13] M. Alrmah, S. Weiss, S. Redif, S. Lambotharan, and J. McWhirter.  
Angle of arrival estimation for broadband signals: A comparison.  
In *IET Intelligent Signal Processing*, London, UK, December 2013.
- [14] A. Alzin, F. Coutts, J. Corr, S. Weiss, I. Proudler, and J. Chambers.  
Polynomial matrix formulation-based Capon beamformer.  
In *IMA International Conference on Signal Processing in Mathematics*, Birmingham, UK, December 2016.

# References III

- [15] A. Alzin, F. Coutts, J. Corr, S. Weiss, I. K. Proudler, and J. A. Chambers.  
Adaptive broadband beamforming with arbitrary array geometry.  
In *IET/EURASIP Intelligent Signal Processing*, London, UK, December 2015.
- [16] V. Anis, C. Delaosa, L. H. Crockett, and S. Weiss.  
Energy-efficient wideband transceiver with per-band equalisation and synchronisation.  
In *IEEE Wireless Communications and Networking Conference*, April 2018.
- [17] G. Barbarino and V. Noferini.  
On the Rellich eigendecomposition of para-Hermitian matrices and the sign characteristics of  $*$ -palindromic matrix polynomials.  
*Linear Algebra and its Applications*, 672:1–27, Sept. 2023.
- [18] K. M. Buckley.  
Spatial/Spectral Filtering with Linearly Constrained Minimum Variance Beamformers.  
*IEEE Transactions on Acoustics, Speech, and Signal Processing*, ASSP-35(3):249–266, March 1987.
- [19] K. M. Buckley and L. J. Griffith.  
An Adaptive Generalized Sidelobe Canceller with Derivative Constraints.  
*IEEE Transactions on Antennas and Propagation*, 34(3):311–319, March 1986.
- [20] A. Bunse-Gerstner, R. Byers, V. Mehrmann, and N. K. Nicols.  
Numerical computation of an analytic singular value decomposition of a matrix valued function.  
*Numer. Math*, 60:1–40, 1991.
- [21] J. Corr, J. Pestana, S. Redif, I. Proudler, and Moonen.  
Investigation of a polynomial matrix generalised evd for multi-channel wiener filtering.  
In *50th Asilomar Conference on Signals Systems and Computers*, Pacific Grove, CA, November 2016.

# References IV

- [22] J. Corr, K. Thompson, S. Weiss, J. McWhirter, and I. Proudler.  
Cyclic-by-row approximation of iterative polynomial EVD algorithms.  
In *Sensor Signal Processing for Defence*, pages 1–5, Edinburgh, Scotland, Sept 2014.
- [23] J. Corr, K. Thompson, S. Weiss, J. McWhirter, and I. Proudler.  
Maximum energy sequential matrix diagonalisation for parahermitian matrices.  
In *48th Asilomar Conference on Signals, Systems and Computers*, pages 470–474, Pacific Grove, CA, USA, November 2014.
- [24] J. Corr, K. Thompson, S. Weiss, J. McWhirter, and I. Proudler.  
Performance trade-offs in sequential matrix diagonalisation search strategies.  
In *IEEE 6th International Workshop on Computational Advances in Multi-Sensor Adaptive Processing*, pages 25–28, Cancun, Mexico, December 2015.
- [25] J. Corr, K. Thompson, S. Weiss, J. McWhirter, S. Redif, and I. Proudler.  
Multiple shift maximum element sequential matrix diagonalisation for parahermitian matrices.  
In *IEEE Workshop on Statistical Signal Processing*, pages 312–315, Gold Coast, Australia, June 2014.
- [26] J. Corr, K. Thompson, S. Weiss, I. Proudler, and J. McWhirter.  
Reduced search space multiple shift maximum element sequential matrix diagonalisation algorithm.  
In *IET/EURASIP Intelligent Signal Processing*, London, UK, December 2015.
- [27] J. Corr, K. Thompson, S. Weiss, I. Proudler, and J. McWhirter.  
Row-shift corrected truncation of paraunitary matrices for PEVD algorithms.  
In *23rd European Signal Processing Conference*, pages 849–853, Nice, France, August/September 2015.
- [28] J. Corr, K. Thompson, S. Weiss, I. Proudler, and J. McWhirter.  
Shortening of paraunitary matrices obtained by polynomial eigenvalue decomposition algorithms.  
In *Sensor Signal Processing for Defence*, Edinburgh, Scotland, September 2015.

# References V

- [29] F. Coutts, J. Corr, K. Thompson, I. Proudler, and S. Weiss.  
Divide-and-conquer sequential matrix diagonalisation for parahermitian matrices.  
In *Sensor Signal Processing for Defence Conference*, pages 1–5, London, UK, December 2017.
- [30] F. Coutts, J. Corr, K. Thompson, S. Weiss, P. I.K., and J. McWhirter.  
Multiple shift QR decomposition for polynomial matrices.  
In *IMA International Conference on Mathematics in Signal Processing*, Birmingham, UK, December 2016.
- [31] F. Coutts, J. Corr, K. Thompson, S. Weiss, I. Proudler, and J. McWhirter.  
Complexity and search space reduction in cyclic-by-row PEVD algorithms.  
In *50th Asilomar Conference on Signals, Systems and Computers*, Pacific Grove, CA, November 2016.
- [32] F. Coutts, K. Thompson, I. Proudler, and S. Weiss.  
Restricted update sequential matrix diagonalisation for parahermitian matrices.  
In *IEEE 7th International Workshop on Computational Advances in Multi-Sensor Adaptive Processing*, Curacao, December 2017.
- [33] F. Coutts, K. Thompson, S. Weiss, and I. Proudler.  
A comparison of iterative and DFT-based polynomial matrix eigenvalue decompositions.  
In *IEEE 7th International Workshop on Computational Advances in Multi-Sensor Adaptive Processing*, Curacao, December 2017.
- [34] F. Coutts, K. Thompson, S. Weiss, and I. Proudler.  
Impact of fast-converging PEVD algorithms on broadband AoA estimation.  
In *Sensor Signal Processing for Defence Conference*, pages 1–5, London, UK, December 2017.
- [35] F. K. Coutts, J. Corr, K. Thompson, S. Weiss, I. Proudler, and J. G. McWhirter.  
Memory and complexity reduction in parahermitian matrix manipulations of PEVD algorithms.  
In *24th European Signal Processing Conference*, Budapest, Hungary, Aug. 2016.

# References VI

- [36] F. K. Coutts, I. K. Proudler, and S. Weiss.  
Efficient implementation of iterative polynomial matrix evd algorithms exploiting structural redundancy and parallelisation.  
*IEEE Transactions on Circuits and Systems I: Regular Papers*, 66(12):4753–4766, Dec. 2019.
- [37] F. K. Coutts, K. Thompson, J. Pestana, I. Proudler, and S. Weiss.  
Enforcing eigenvector smoothness for a compact DFT-based polynomial eigenvalue decomposition.  
In *10th IEEE Workshop on Sensor Array and Multichannel Signal Processing*, pages 1–5, July 2018.
- [38] F. K. Coutts, K. Thompson, I. K. Proudler, and S. Weiss.  
An iterative dft-based approach to the polynomial matrix eigenvalue decomposition.  
In *52nd Asilomar Conference on Signals, Systems, and Computers*, pages 1011–1015, Oct 2018.
- [39] F. K. Coutts, K. Thompson, S. Weiss, and I. K. Proudler.  
Analysing the performance of divide-and-conquer sequential matrix diagonalisation for large broadband sensor arrays.  
In *2017 IEEE International Workshop on Signal Processing Systems*, pages 1–6, Lorient, France, October 2017.
- [40] W. Coventry, C. Clemente, and J. Soraghan.  
Enhancing polynomial music algorithm for coherent broadband sources through spatial smoothing.  
In *2017 25th European Signal Processing Conference (EUSIPCO)*, pages 2448–2452, 2017.
- [41] W. Coventry, C. Clemente, and J. Soraghan.  
Polynomial root-music algorithm for efficient broadband direction of arrival estimation.  
In *2017 Sensor Signal Processing for Defence Conference (SSPD)*, pages 1–5, 2017.
- [42] W. Coventry, C. Clemente, and J. Soraghan.  
Broadband sparse sensing: A polynomial matrix approach to co-prime and super nested arrays.  
In *2019 IEEE Radar Conference (RadarConf)*, pages 1–6, 2019.

# References VII

- [43] A. Das and W. S. Geisler.  
A method to integrate and classify normal distributions.  
*arXiv e-prints*, page arXiv:2012.14331, Dec. 2020.
- [44] B. De Moor and S. Boyd.  
Analytic properties of singular values and vectors.  
Technical report, KU Leuven, 1989.
- [45] C. Delaosa, F. K. Coutts, J. Pestana, and S. Weiss.  
Impact of space-time covariance estimation errors on a parahermitian matrix EVD.  
In *10th IEEE Workshop on Sensor Array and Multichannel Signal Processing*, pages 1–5, July 2018.
- [46] C. Delaosa, J. Pestana, N. J. Goddard, S. Somasundaram, and S. Weiss.  
Sample space-time covariance matrix estimation.  
In *IEEE International Conference on Acoustics, Speech and Signal Processing*, pages 8033–8037, Brighton, UK, May 2019.
- [47] C. Delaosa, J. Pestana, N. J. Goddard, S. D. Somasundaram, and S. Weiss.  
Support estimation of a sample space-time covariance matrix.  
In *Sensor Signal Processing for Defence*, Brighton, UK, March 2019.
- [48] N. J. Fliege.  
*Multirate Digital Signal Processing: Multirate Systems, Filter Banks, Wavelets*.  
John Wiley & Sons, Chichester, 1994.
- [49] J. Foster, J. McWhirter, M. Davies, and J. Chambers.  
An algorithm for calculating the qr and singular value decompositions of polynomial matrices.  
*IEEE Transactions on Signal Processing*, 58(3):1263–1274, March 2010.

# References VIII

- [50] J. Foster, J. McWhirter, S. Lambotharan, I. Proudler, M. Davies, and J. Chambers.  
Polynomial matrix qr decomposition for the decoding of frequency selective multiple-input multiple-output communication channels.  
*IET Signal Processing*, 6(7):704–712, September 2012.
- [51] J. Foster, J. G. McWhirter, and J. Chambers.  
Limiting the order of polynomial matrices within the SBR2 algorithm.  
In *IMA International Conference on Mathematics in Signal Processing*, Cirencester, UK, December 2006.
- [52] I. Gohberg, P. Lancaster, and L. Rodman.  
*Matrix Polynomials*.  
Academic Press, New York, 1982.
- [53] G. H. Golub and C. F. Van Loan.  
*Matrix Computations*.  
John Hopkins University Press, Baltimore, Maryland, 3rd edition, 1996.
- [54] J. A. Hanley and B. J. McNeil.  
The Meaning and Use of the Area under a Receiver Operating Characteristic (ROC) Curve.  
*Radiology*, 143:26–36, 1982.
- [55] L. Hanzo, M. Münster, B. J. Choi, and T. Keller.  
*OFDM and MC-CDMA for Broadband Multi-User Communications, WLANs, and Broadcasting*.  
IEEE and John Wiley & Sons, Chichester, UK, 2003.
- [56] D. Hassan, S. Redif, J. G. McWhirter, and S. Lambotharan.  
Polynomial gsvd beamforming for two-user frequency-selective mimo channels.  
*IEEE Transactions on Signal Processing*, 69:948–959, 2021.

# References IX

- [57] M. W. Hoffman and K. M. Buckley.  
Robust Time-Domain Processing of Broadband Microphone Array Data.  
*IEEE Transactions on Speech and Audio Processing*, 3(3):193–203, May 1995.
- [58] A. Hogg, V. Neo, S. Weiss, C. Evers, and P. Naylor.  
A polynomial eigenvalue decomposition MUSIC approach for broadband sound source localization.  
In *IEEE Workshop on Applications of Signal Processing to Audio and Acoustics*, New Paltz, NY, Oct. 2021.
- [59] S. Icart and P. Comon.  
Some properties of Laurent polynomial matrices.  
In *9th IMA Conference on Mathematics in Signal Processing*, Birmingham, UK, December 2012.
- [60] S. Kasap and S. Redif.  
Novel field-programmable gate array architecture for computing the eigenvalue decomposition of para-hermitian polynomial matrices.  
*IEEE Transactions on Very Large Scale Integration (VLSI) Systems*, 22(3):522–536, March 2014.
- [61] T. Kato.  
*Perturbation Theory for Linear Operators*.  
Springer, 1980.
- [62] F. Khattak, I. Proudler, J. McWhirter, and S. Weiss.  
Generalised sequential matrix diagonalisation for the SVD of polynomial matrices.  
In *International Conference on Defence for Signal Processing*, Edinburgh, Scotland, Sept. 2023.  
submitted.
- [63] F. Khattak, I. Proudler, and S. Weiss.  
Generalized polynomial power method.  
In *International Conference on Sensor Signal Processing for Defence*, Edinburgh, Scotland, Sept. 2023.  
submitted.

# References X

- [64] F. Khattak, I. K. Proudler, and S. Weiss.  
Support estimation of analytic eigenvectors of parahermitian matrices.  
*In International Conference on Recent Advances in Electrical Engineering and Computer Sciences*, Islamabad, Pakistan, October 2022.
- [65] F. A. Khattak, I. K. Proudler, and S. Weiss.  
Enhanced space-time covariance estimation based on a system identification approach.  
*In Sensor Signal Processing for Defence Conference*, London, UK, Sept. 2022.
- [66] F. A. Khattak, I. K. Proudler, and S. Weiss.  
Extension of power method to para-Hermitian matrices: polynomial power method.  
*In EUSIPCO*, Helsinki, Finland, Sept. 2023.  
accepted.
- [67] F. A. Khattak, S. Weiss, and I. K. Proudler.  
Fast givens rotation approach to second order sequential best rotation algorithms.  
*In International Conference in Sensor Signal Processing for Defence*, pages 40–44, Edinburgh, Scotland, September 2021.
- [68] F. A. Khattak, S. Weiss, I. K. Proudler, and J. G. McWhirter.  
Space-time covariance matrix estimation: Loss of algebraic multiplicities of eigenvalues.  
*In 56th Asilomar Conference on Signals, Systems, and Computers*, Pacific Grove, CA, Oct. 2022.
- [69] T. I. Laakso, V. Välimäki, M. Karjalainen, and U. K. Laine.  
Splitting the Unit Delay.  
*IEEE Signal Processing Magazine*, 13(1):30–60, January 1996.
- [70] P. Lancaster and M. Tismenetsky.  
*The Theory of Matrices*.  
Academic Press, 1985.

# References XI



- [71] C. Liu, M. Hedef, C. H. Ta, and S. Weiss.  
A Coding and Equalisation Approach for Dispersive Channels with Structured Additive Noise.  
In S. Weiss, editor, *IEE/EURASIP Conference on DSP Enabled Radio*, volume 2005/11086, pages 33/1–33/4, Southampton, UK, September 2005.
- [72] C. Liu, C. H. Ta, and S. Weiss.  
Joint precoding and equalisation design using oversampled filter banks for dispersive channels with correlated noise.  
In *IEEE Workshop on Signal Processing Systems*, pages 232–236, Shanghai, China, October 2007.
- [73] C. Liu. and S. Weiss.  
A precoding and equalisation design based on oversampled filter banks for dispersive channels with correlated noise.  
In *15th European Signal Processing Conference*, pages 511–514, Poznan, Poland, September 2007.
- [74] C. Liu, S. Weiss, S. Redif, T. Cooper, L. Lampe, and J. G. McWhirter.  
Channel Coding for Power Line Communication Based on Oversampled Filter Banks.  
In L. Lampe, editor, *International Symposium on Power Line Communications and Its Applications*, pages 246–249, Vancouver, CA, April 6-8 2005.
- [75] W. Liu and S. Weiss.  
*Wideband Beamforming — Concepts and Techniques*.  
Wiley, 2010.
- [76] W. Liu, S. Weiss, and L. Hanzo.  
A Novel Method for Partially Adaptive Broadband Beamforming.  
In *IEEE Workshop on Signal Processing Systems*, pages 361–372, Antwerp, September 2001.
- [77] W. Liu, S. Weiss, and L. Hanzo.  
Subband Adaptive Broadband Beamforming.  
In *Third Conference on Postgraduate Research in Electronics, Photonics, Communications and Software*, University of Keele, UK, April 2001. EPSRC.

# References XII



- [78] W. Liu, S. Weiss, and L. Hanzo.  
Subband Adaptive Generalized Sidelobe Canceller for Broadband Beamforming.  
In *11th IEEE Signal Processing Workshop on Statistical Signal Processing*, volume 1, pages 591–594, Singapore, August 2001.
- [79] W. Liu, S. Weiss, and L. Hanzo.  
Low-Complexity Frequency-Domain GSC for Broadband Beamforming.  
In *6th International Conference on Signal Processing*, volume 1, pages 386–389, Beijing, China, August 26–30 2002.
- [80] W. Liu, S. Weiss, and L. Hanzo.  
Partially Adaptive Broadband Beamforming with a Subband Selective Transformation Matrix.  
In *Sensor Array and Multichannel Signal Processing Workshop*, pages 43–47, Washington, DC, August 4–6 2002.
- [81] W. Liu, S. Weiss, and L. Hanzo.  
Subband-Selective Partially Adaptive Broadband Beamforming with Cosine-Modulated Blocking Matrix.  
In *Proc. IEEE International Conference on Acoustics, Speech, and Signal Processing*, volume 3, pages 2913–2916, Orlando, FL, May 2002.
- [82] W. Liu, S. Weiss, and L. Hanzo.  
A Novel Method for Partially Adaptive Broadband Beamforming.  
*Journal of VLSI Signal Processing*, 33(3):337–344, March 2003.  
ISSN 0922-5773.
- [83] W. Liu, S. Weiss, and L. Hanzo.  
A Subband-Selective Transform-Domain GSC with Low Computational Complexity.  
In *Seventh Conference on Postgraduate Research in Electronics, Photonics, Photonics, Communications and Software*, University of Exeter, UK, April 14–16 2003.
- [84] J. G. McWhirter.  
An algorithm for polynomial matrix SVD based on generalised Kogbetliantz transformations.  
In *18th European Signal Processing Conference*, pages 457–461, Aalborg, Denmark, August 2010.

# References XIII

- [85] J. G. McWhirter and P. D. Baxter.  
A Novel Techniqe for Broadband SVD.  
In *12th Annual Workshop on Adaptive Sensor Array Processing*, MIT Lincoln Labs, Cambridge, MA, 2004.
- [86] J. G. McWhirter, P. D. Baxter, T. Cooper, S. Redif, and J. Foster.  
An EVD Algorithm for Para-Hermitian Polynomial Matrices.  
*IEEE Transactions on Signal Processing*, 55(5):2158–2169, May 2007.
- [87] X. Mestre and D. Gregoratti.  
A parallel processing approach to filterbank multicarrier MIMO transmission under strong frequency selectivity.  
In *IEEE International Conference on Acoustics, Speech and Signal Processing*, pages 8078–8082, May 2014.
- [88] A. Millar, S. Weiss, and R. Stewart.  
THP transceiver design for MIMO relaying with direct link and partial CSI.  
*IEEE Communications Letters*, 17(6):1204–1207, May 2013.
- [89] A. Millar, S. Weiss, and R. Stewart.  
Training based channel estimation algorithms for dual hop MIMO OFDM relay systems.  
*IEEE Transactions on Communications*, 63(12):4711–4726, December 2015.
- [90] A. P. Millar and S. Weiss.  
Design of ZF and MMSE filter-banks in relay networks with average and peak power constraints.  
In *IEEE Workshop on Statistical Signal Processing*, Cardiff, UK, August 2009.
- [91] A. P. Millar and S. Weiss.  
Transceiver design for non-regenerative MIMO relay systems with decision feedback detection.  
In *18th European Signal Processing Conference*, pages 402–406, Aalborg, Denmark, August 2010.

# References XIV

- [92] A. P. Millar, S. Weiss, and R. W. Stewart.  
Precoder design for MIMO relay networks with direct link and decision feedback equalisation.  
*IEEE Communications Letters*, 15(10):1044–1046, October 2011.
- [93] A. P. Millar, S. Weiss, and R. W. Stewart.  
Tomlinson Harashima precoding design for non-regenerative MIMO relay networks.  
In *IEEE 73rd Vehicular Technology Conference*, pages 1–5, Budapest, Hungary, May 2011.
- [94] A. P. Millar, S. Weiss, and R. W. Stewart.  
ZF DFE transceiver design for MIMO relay systems with direct source-destination link.  
In *19th European Signal Processing Conference*, pages 1824–1828, Barcelona, Spain, August 2011.
- [95] A. P. Millar, S. Weiss, and R. W. Stewart.  
Robust transceiver design for mimo relay systems with tomlinson harashima precoding.  
In *20th European Signal Processing Conference*, pages 1374–1378, Bukarest, Romania, August 2012.
- [96] A. H. Moore, M. Brookes, and P. A. Naylor.  
Room geometry estimation from a single channel acoustic impulse response.  
In *21st European Signal Processing Conference*, pages 1–5, Sep. 2013.
- [97] N. Moret, A. Tonello, and S. Weiss.  
Mimo precoding for filter bank modulation systems based on psvd.  
In *IEEE 73rd Vehicular Technology Conference*, pages 1–5, May 2011.  
(best paper award).
- [98] A. Nagy and S. Weiss.  
Comparison of different filter-bank based multicarrier systems with fractionally spaced equalisation.  
In *IMA International Conference on Mathematics in Signal Processing*, Birmingham, UK, December 2016.

# References XV

- [99] A. Nagy and S. Weiss.  
Synchronisation and equalisation of an fbmc/oqam system by a polynomial matrix pseudo-inverse.  
In *IEEE International Symposium on Signal Processing and Information Technology*, Bilbao, December 2017.
- [100] A. A. Nagy and S. Weiss.  
Channel equalisation of a MIMO FBMC/OQAM system using a polynomial matrix pseudo-inverse.  
In *10th IEEE Workshop on Sensor Array and Multichannel Signal Processing*, April 2018.
- [101] V. Neo, C. Evers, S. Weiss, and P. Naylor.  
Signal compaction using polynomial EVD for spherical array processing with applications.  
*IEEE Transactions on Audio, Speech, and Language Processing*, submitted December 2022.
- [102] V. Neo, S. Redif, J. McWhirter, J. Pestana, I. Proudler, S. Weiss, and N. P.A.  
Polynomial eigenvalue decomposition for multichannel broadband signal processing.  
*IEEE Signal Processing Magazine*, submitted November 2023.
- [103] V. W. Neo and P. A. Naylor.  
Second order sequential best rotation algorithm with householder reduction for polynomial matrix eigenvalue decomposition.  
In *IEEE International Conference on Acoustics, Speech and Signal Processing*, pages 8043–8047, Brighton, UK, May 2019.
- [104] V. W. Neo, S. Weiss, S. W. McKnight, A. O. T. Hogg, and P. A. Naylor.  
Polynomial eigenvalue decomposition-based target speaker voice activity detection in the presence of competing talkers.  
In *17th International Workshop on Acoustic Signal Enhancement*, Bamberg, Germany, Sept. 2022.
- [105] V. W. Neo, S. Weiss, and P. A. Naylor.  
A polynomial subspace projection approach for the detection of weak voice activity.  
In *Sensor Signal Processing for Defence Conference*, pages 1–5, London, UK, Sept. 2022.

# References XVI

- [106] A. I. Pérez-Neira, M. Caus, R. Zakaria, D. L. Ruyet, E. Kofidis, M. Haardt, X. Mestre, and Y. Cheng. MIMO signal processing in offset-QAM based filter bank multicarrier systems. *IEEE Transactions on Signal Processing*, 64(21):5733–5762, November 2016.
- [107] S. Redif, J. McWhirter, and S. Weiss. Design of FIR paraunitary filter banks for subband coding using a polynomial eigenvalue decomposition. *IEEE Transactions on Signal Processing*, 59(11):5253–5264, November 2011.
- [108] S. Redif, S. Weiss, and J. McWhirter. Sequential matrix diagonalization algorithms for polynomial EVD of parahermitian matrices. *IEEE Transactions on Signal Processing*, 63(1):81–89, January 2015.
- [109] S. Redif, S. Weiss, and J. G. McWhirter. An approximate polynomial matrix eigenvalue decomposition algorithm for para-hermitian matrices. In *11th IEEE International Symposium on Signal Processing and Information Technology*, pages 421–425, Bilbao, Spain, December 2011.
- [110] F. Rellich. Störungstheorie der Spektralzerlegung. III. Mitteilung. Analytische, nicht notwendig beschränkte Störung. *Mathematische Annalen*, 116:555–570, 1939.
- [111] A. Scaglione, G. B. Giannakis, and S. Barbarossa. Filterbank Transceivers Optimizing Information Rate in Block Transmission over Dispersive Channels. *IEEE Transactions on Information Theory*, 45(4):1019–1032, April 1999.
- [112] A. Scaglione, G. B. Giannakis, and S. Barbarossa. Redundant Filterbank Precoders and Equalizers. I. Unification and Optimal Designs. *IEEE Transactions on Signal Processing*, 47(7):1988–2006, July 1999.

# References XVII

- [113] A. Scaglione, G. B. Giannakis, and S. Barbarossa.  
Redundant Filterbank Precoders and Equalizers. II. Blind Channel Estimation, Synchronization, and Direct Equalization.  
*IEEE Transactions on Signal Processing*, 47(7):2007–2022, July 1999.
- [114] J. Selva.  
An efficient structure for the design of variable fractional delay filters based on the windowing method.  
*IEEE Transactions on Signal Processing*, 56(8):3770–3775, August 2008.
- [115] H. Solomon and M. A. Stephens.  
Distribution of a sum of weighted chi-square variables.  
*Journal of the American Statistical Association*, 72(360):881–885, 1977.
- [116] C. H. Ta and S. Weiss.  
Design of Precoding and Equalisation for MIMO Broadband Transmission.  
In S. Weiss, editor, *IEE/EURASIP Conference on DSP Enabled Radio*, volume 2005/11086, pages 30/1–30/5, Southampton, UK, September 2005.
- [117] C. H. Ta and S. Weiss.  
A Design of Precoding and Equalisation for Broadband MIMO Systems.  
In *15th International Conference on Digital Signal Processing*, pages 571–574, Cardiff, UK, July 2007.
- [118] C. H. Ta and S. Weiss.  
A design of precoding and equalisation for broadband MIMO systems.  
In *Forty-First Asilomar Conference on Signals, Systems and Computers*, pages 1616–1620, Pacific Grove, CA, USA, Nov. 2007.
- [119] C. H. Ta and S. Weiss.  
A Jointly Optimal Precoder and Block Decision Feedback Equaliser Design With Low Redundancy.  
In *15th European Signal Processing Conference*, pages 489–492, Poznan, Poland, September 2007.

# References XVIII

- [120] C. H. Ta and S. Weiss.  
Shortening the order of paraunitary matrices in SBR2 algorithm.  
In *6th International Conference on Information, Communications & Signal Processing*, pages 1–5, Singapore, Dec. 2007.
- [121] M. Tohidian, H. Amindavar, and A. M. Reza.  
A DFT-based approximate eigenvalue and singular value decomposition of polynomial matrices.  
*EURASIP Journal on Advances in Signal Processing*, 2013(1):1–16, 2013.
- [122] P. P. Vaidyanathan.  
Multirate Digital Filters, Filter Banks, Polyphase Networks, and Applications: A Tutorial.  
*Proceedings of the IEEE*, 78(1):56–93, January 1990.
- [123] P. P. Vaidyanathan.  
*Multirate Systems and Filter Banks*.  
Prentice Hall, Englewood Cliffs, 1993.
- [124] B. D. Van Veen and K. M. Buckley.  
Beamforming: A Versatile Approach to Spatial Filtering.  
*IEEE Acoustics, Speech, and Signal Processing Magazine*, 5(2):4–24, April 1988.
- [125] Z. Wang, J. McWhirter, J. Corr, and S. Weiss.  
Order-controlled multiple shift sbr2 algorithm for para-hermitian polynomial matrices.  
In *9th IEEE Sensor Array and Multichannel Signal Processing Workshop*, Rio de Janeiro, Brazil, July 2016.
- [126] Z. Wang, J. G. McWhirter, J. Corr, and S. Weiss.  
Multiple shift second order sequential best rotation algorithm for polynomial matrix EVD.  
In *23rd European Signal Processing Conference*, pages 844–848, Nice, France, September 2015.

# References XIX

- [127] S. Weiss.  
Design of Overcomplete Expansions for Channel Coding.  
In *6th IMA International Conference on Mathematics in Signal Processing*, volume 1, pages 215–218, Royal Agricultural College, Cirencester, UK, December 14–16, 2004.
- [128] S. Weiss.  
On the design of oversampled filter banks for channel coding.  
In *European Signal Processing Conference*, volume 1, pages 885–888, Vienna, Austria, September 2004.  
invited paper.
- [129] S. Weiss, M. Almah, S. Lambbotharan, J. McWhirter, and M. Kaveh.  
Broadband angle of arrival estimation methods in a polynomial matrix decomposition framework.  
In *IEEE 5th International Workshop on Computational Advances in Multi-Sensor Adaptive Processing*, pages 109–112, Dec 2013.
- [130] S. Weiss, S. Bendoukha, A. Alzin, F. Coutts, I. Proudler, and J. Chambers.  
MVDR broadband beamforming using polynomial matrix techniques.  
In *23rd European Signal Processing Conference*, pages 839–843, Nice, France, September 2015.
- [131] S. Weiss, C. Delaosa, J. Matthews, I. Proudler, and B. Jackson.  
Detection of weak transient signals using a broadband subspace approach.  
In *International Conference on Sensor Signal Processing for Defence*, pages 65–69, Edinburgh, Scotland, Sept. 2021.
- [132] S. Weiss, N. J. Goddard, S. Somasundaram, I. K. Proudler, and P. A. Naylor.  
Identification of broadband source-array responses from sensor second order statistics.  
In *Sensor Signal Processing for Defence Conference*, pages 1–5, London, UK, December 2017.
- [133] S. Weiss and M. D. Macleod.  
Maximally smooth dirichlet interpolation from complete and incomplete sample points on the unit circle.  
In *IEEE International Conference on Acoustics, Speech, and Signal Processing*, Brighton, UK, May 2019.

# References XX

- [134] S. Weiss, J. Pestana, and I. K. Proudler.  
On the existence and uniqueness of the eigenvalue decomposition of a parahermitian matrix.  
*IEEE Transactions on Signal Processing*, 66(10):2659–2672, May 2018.
- [135] S. Weiss, J. Pestana, I. K. Proudler, and F. K. Coutts.  
Corrections to “on the existence and uniqueness of the eigenvalue decomposition of a parahermitian matrix”.  
*IEEE Transactions on Signal Processing*, 66(23):6325–6327, Dec 2018.
- [136] S. Weiss, I. Proudler, F. Coutts, and J. Deeks.  
Extraction of analytic eigenvectors from a parahermitian matrix.  
In *International Conference on Sensor Signal Processing or Defence*, Edinburgh, UK, 2020.
- [137] S. Weiss and I. K. Proudler.  
Comparing Efficient Broadband Beamforming Architectures and Their Performance Trade-Offs.  
In *14th International Conference on Digital Signal Processing*, volume I, pages 417–422, Santorini, Greece, July 1–3 2002.  
(invited paper).
- [138] S. Weiss, I. K. Proudler, G. Barbarino, J. Pestana, and J. G. McWhirter.  
On properties and structure of the analytic singular value decomposition.  
*IEEE Transactions on Signal Processing*, 2023.  
to be submitted.
- [139] S. Weiss, I. K. Proudler, and F. K. Coutts.  
Eigenvalue decomposition of a parahermitian matrix: extraction of analytic eigenvalues.  
*IEEE Transactions on Signal Processing*, 69:722–737, 2021.
- [140] S. Weiss, I. K. Proudler, F. K. Coutts, and J. Pestana.  
Iterative approximation of analytic eigenvalues of a parahermitian matrix EVD.  
In *IEEE International Conference on Acoustics, Speech and Signal Processing*, Brighton, UK, May 2019.

# References XXI

- [141] S. Weiss, I. K. Proudler, and M. D. Macleod.  
Measuring smoothness of real-valued functions defined by sample points on the unit circle.  
In *Sensor Signal Processing in Defence Conference*, Brighton, UK, May 2019.
- [142] S. Weiss, S. Redif, T. Cooper, C. Liu, P. Baxter, and J. McWhirter.  
Paraunitary oversampled filter bank design for channel coding.  
*EURASIP Journal on Advances in Signal Processing*, 2006:1–10, 2006.
- [143] S. Weiss, G. W. Rice, and R. W. Stewart.  
Multichannel Equalization in Subbands.  
In *IEEE Workshop on Applications of Signal Processing to Audio and Acoustics*, pages 203–206, New Paltz, NY, October 1999.
- [144] S. Weiss, S. J. Schlecht, O. Das, and E. de Sena.  
Polynomial Procrustes problem: Paraunitary approximation of matrices of analytic functions.  
In *EUSIPCO*, Helsinki, Finland, 2023.
- [145] S. Weiss, J. Selva, and M. D. Macleod.  
Measuring smoothness of trigonometric interpolation through incomplete sample points.  
In *28th European Signal Processing Conference*, pages 2319–2323, Amsterdam, Netherlands, Jan. 2021.
- [146] S. Weiss, R. W. Stewart, and W. Liu.  
A Broadband Adaptive Beamforming Structure with Scaled Aperture.  
In *Thirty-Sixth Asilomar Conference on Signals, Systems and Computers*, volume 2, pages 1298–1302, Pacific Grove, CA, November 3–6 2002.
- [147] S. Weiss, R. W. Stewart, A. Stenger, and R. Rabenstein.  
Performance Limitations of Subband Adaptive Filters.  
In *9th European Signal Processing Conference*, volume III, pages 1245–1248, Rodos, Greece, September 1998.

- [148] S. Weiss, C. H. Ta, and C. Liu.  
A wiener filter approach to the design of filter bank based single-carrier precoding and equalisation.  
In *IEEE International Symposium on Power Line Communications and Its Applications*, pages 493–498, Pisa, Italy, March 26-28 2007.
- [149] S. Weiss, P. Yarr, W. Al-Hanafy, A. Millar, and C.-H. Ta.  
An oversampled modulated filter bank transmultiplexer with precoding and equalisation.  
In *Third Workshop on Power Line Communications*, Udine, Italy, October 2009.